




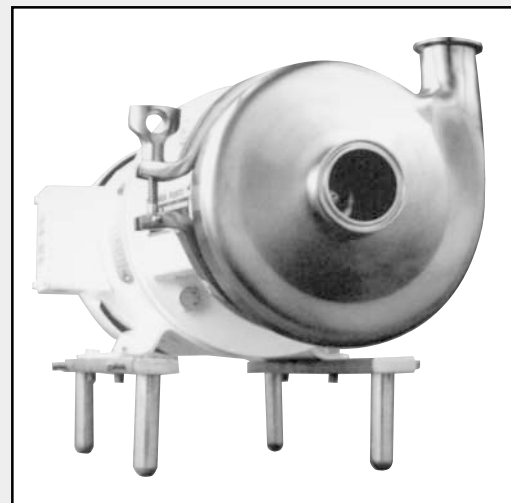



- Up to 780 GPM
- Up to 300 feet of head
- CIP capability
- Temperatures to 212° F
- Sanitary Clamp, NEMA thread, or NPT (male or female) are optional
- Buna or Viton elastomers
- Standard C-Face motor mounting
- Hydraulic balancing reduces wear and increases efficiency

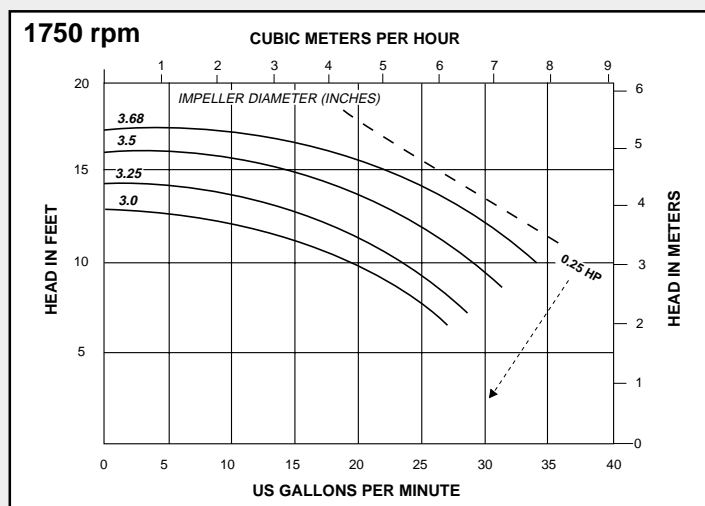

C100 SERIES – 1 1/2" x 1" CURVES

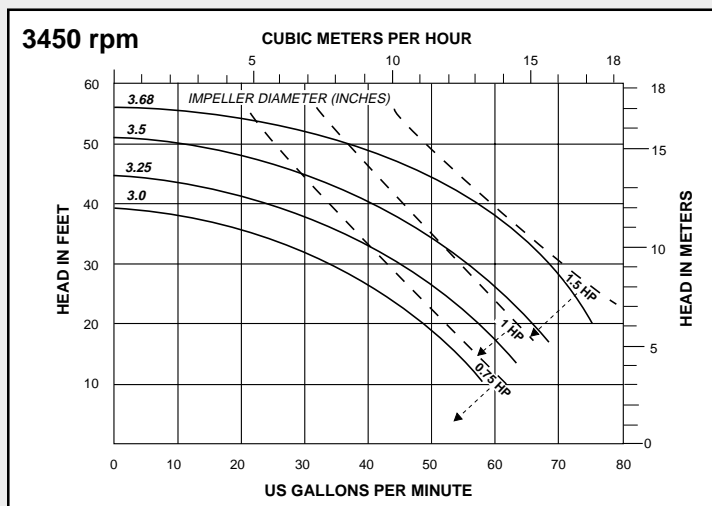

C114 SERIES – 1 1/2" x 1 1/2" CURVES

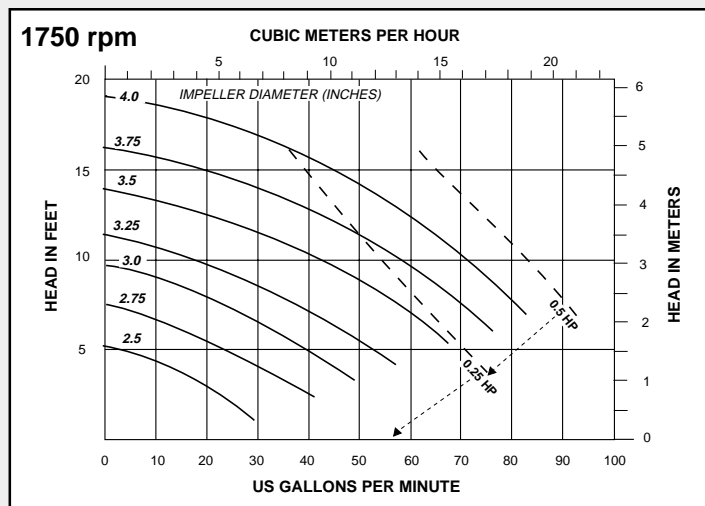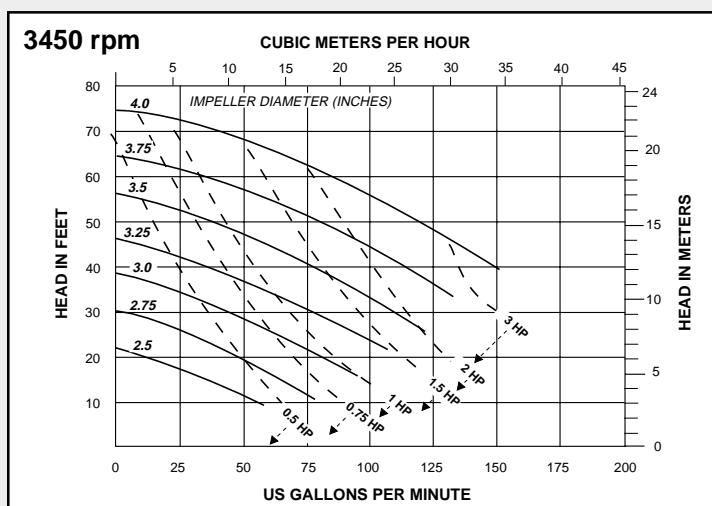

All curves are based on water at 70° F.

FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656