


DC AND AC SUBMERSIBLE PUMPS

RULE



DC Automatic and Manual

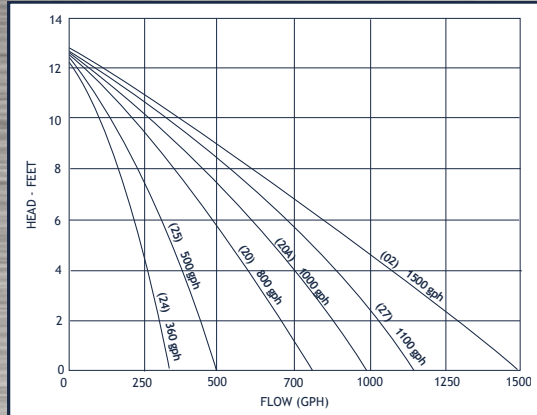

UP TO 1500 GPH, 12' TDH


- Plastic housing, stainless steel shaft
- Voltages: 12, 24 and 32 vdc
- Marine duty rated
- Manual or *automatic operation
- Compact size: (H x W x L)
360 and 500 – 3 1/2" x 2 3/8" x 2 3/8"
800 and 900 – 4" x 2 1/2" x 2 1/2"
1100 – 3 7/8" x 2 3/8" x 2 3/8"
1500 – 6" x 4 1/2" x 4 1/2"

*Optional automatic feature adds to dimensions

RULE



DC Automatic and Manual

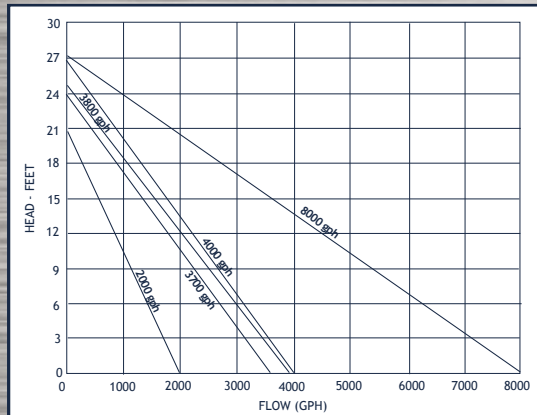

UP TO 8000 GPH, 27' TDH


- Plastic housing, stainless steel shaft
- Voltages: 12, 24 and 32 vdc
- Marine duty rated
- Manual or *automatic operation
- Compact size: (H x W x L)
2000 – 6" x 4 1/2" x 4 1/2"
4000 – 7 1/4" x 4 7/8" x 4 7/8"
8000 – 7 1/4" x 12" x 4 7/8"

*Optional automatic feature adds to dimensions

RULE



115 vac Automatic

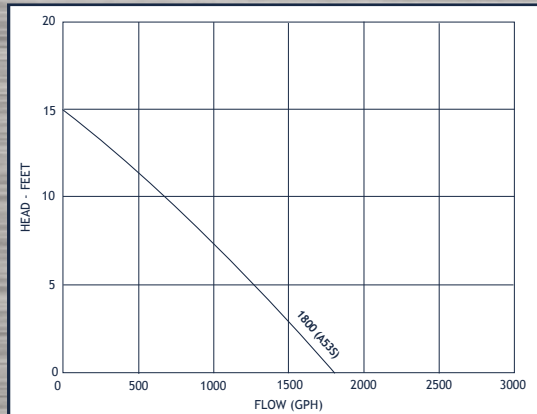


UP TO 1800 GPH, 15' TDH

- Plastic housing, stainless steel shaft
- Voltages: 115 or 230 vac
- Marine duty rated
- Automatic operation
- Compact size: (H x W x L)
1800 – 7 3/4" x 4 7/8" x 4 7/8"

RULE



Slimline Series

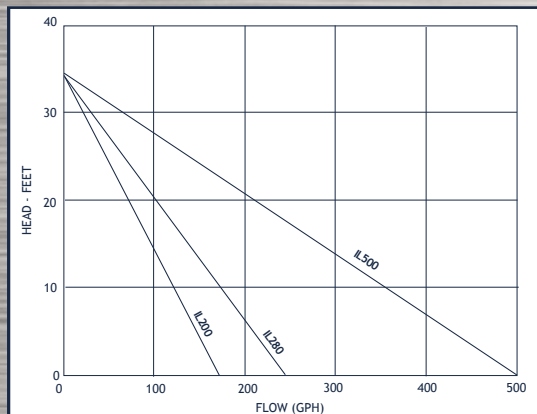

UP TO 500 GPH, 34' TDH

- Submersible or inline configuration
- Fresh or salt water duty
- Intermittent 20 min rating
- 140° max water temperature
- Available pump only or in kit complete with battery clips, discharge hose and spray nozzle
- Slim and compact
IL200: 1.3" dia x 5.1" L
IL280: 1.5" dia x 6.5" L
IL500: 1.5" dia x 6.5" L