


BOOSTERS AND RECIRCULATORS

GRUNDFOS




UP Series circulators

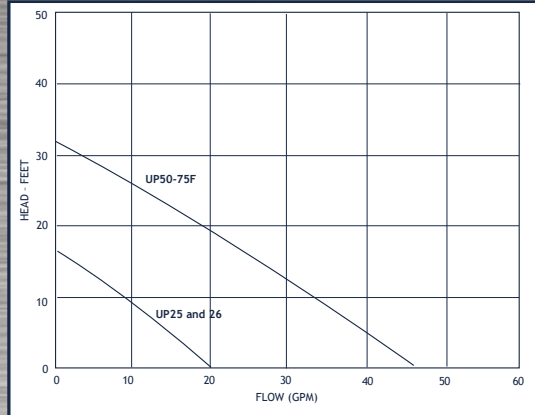


UP TO 46 GPM, 32.5' TDH

- Stainless steel, bronze, and composite wetted parts
- Wet rotor design for quiet and maintenance-free operation
- Optional 24 hour programmable timer
- Designed specifically for hot water circulation

MARCH

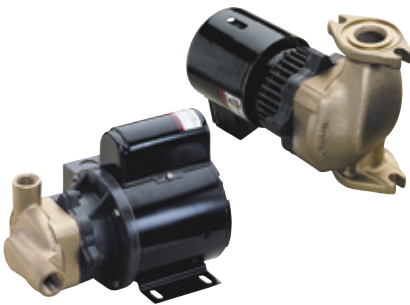

821 / 869 / 830 Series

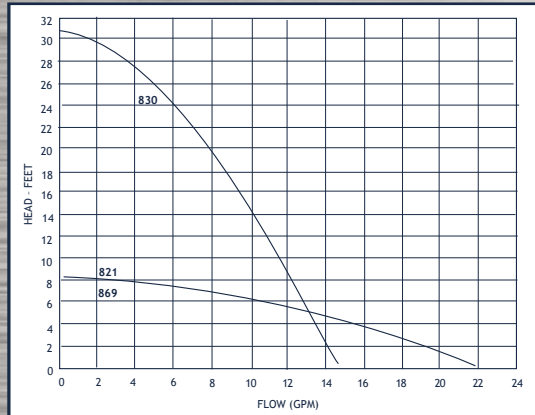


UP TO 22 GPM, 30' TDH

- Temperatures to 350° F
- Enclosed impeller
- 3/4" FPT on flanged ports
- Construction: bronze or cast iron
- Materials in contact with solution: housing material, 316SS, Ryton® or nylon, ceramic, nitrile/fiber gasket and carbon
- Voltage Options: 115 or 230 vac

MARCH



809 / 815 Series

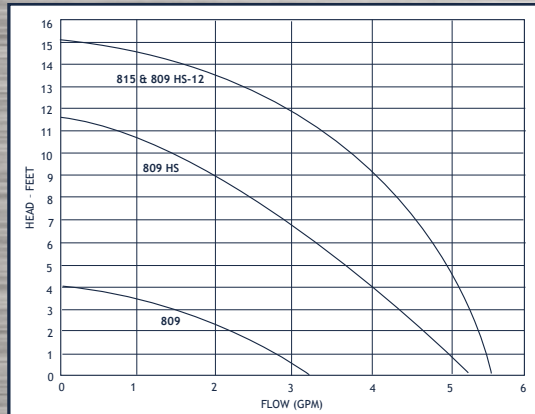


UP TO 5.5 GPM, 15' TDH

- Temperatures to 250° F
- Open impeller
- 1/2" MPT ports (3/4" MPT inlet on center inlet models)
- Construction: bronze or plastic
- Materials in contact with solution: housing material, 316SS, silicon rubber, Ryton® and Teflon®
- Voltage Options: 12 or 24 vdc

LAING



E Series Circulation Pumps

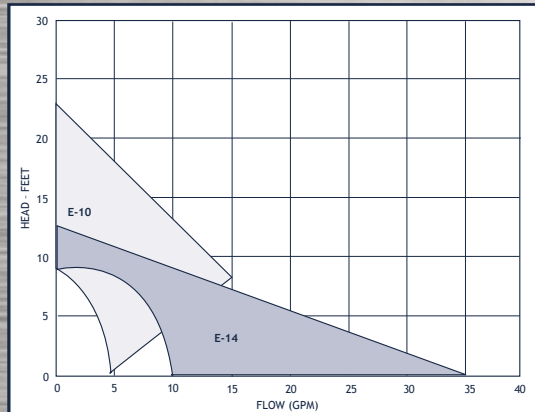

UP TO 35 GPM, 22' TDH

- Extremely energy efficient
- Variable speed technology
- Dry run protection
- Open impeller, resistant to clogging
- 115 or 230 vac, single phase 50/60 hz