


MISCELLANEOUS GEAR PUMPS

FLUID-O-TECH Mag Drive Gear



MG/MGK 200 and 300 Series

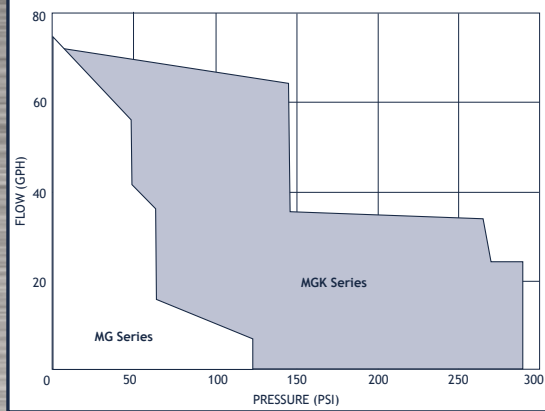


UP TO 72 GPH, 290 PSI

- Temperatures to 248°F
- Solid 316SS construction
- Gear materials in PEEK or PTFE
- Optional relief valve available
- 1/8" female NPT ports (MG Series)
- 1/4" female NPT ports (MGK Series)
- Will couple directly to IEC M56, M63 or NEMA 56C electric motors

SHERTECH



Cast Iron, Bronze, Stainless

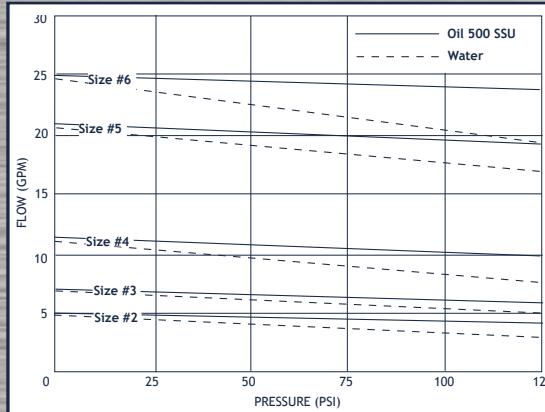


UP TO 24 GPM, 125 PSI

- Temperatures to 400°F
- Viscosities to 100,000 SSU
- Seal Options: Buna, Viton® and Teflon®
- Mounting Options: Pedestal, 56C, 145TC, 182TC and 184TC
- Wide range of drive options

JABSCO




Stainless S2 Series

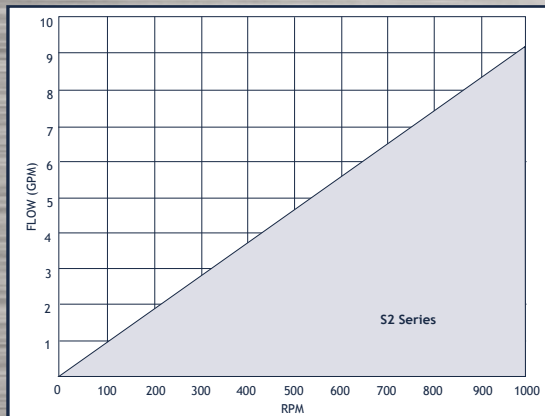


UP TO 9.2 GPM, 101 PSI

- Temperatures to 302°F
- 316SS construction
- Eight tooth spur gears (standard) or three lobe rotors
- Single mechanical or o-ring seal arrangements
- BSP ports standard, all others optional
- Will pass up to 5mm soft solids
- Timed gears ensure extremely accurate flow

JABSCO

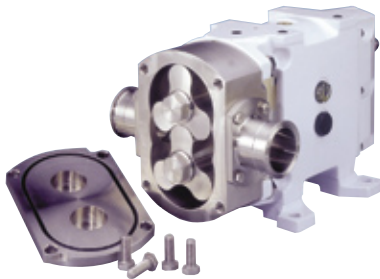

Stainless 24 Series

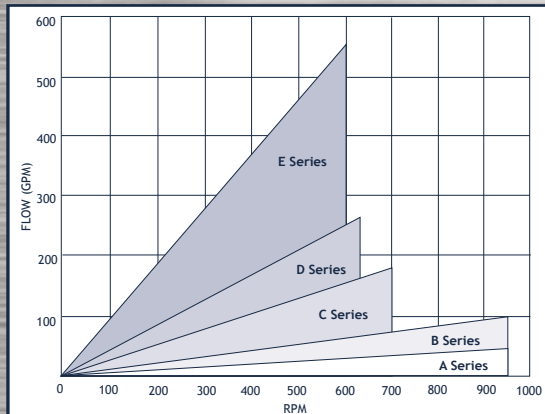

UP TO 554 GPM, 203 PSI

- Temperatures to 392°F
- 316SS construction - true rotary lobe non-contacting
- Viscosities to 1,000,000 CPS
- Port Options: NPT, Tri-clamp, BSP, DIN, SMS, RJT and IDF
- Seal Options: wide variety of single, double and flush mechanical seals along with multiple o-ring and lip seal options
- Rotor Options: tri-lobe, bi-lobe and rubber coated