


AIR OPERATED DIAPHRAGM PUMPS

YAMADA




NDP-5 Series (1/4")

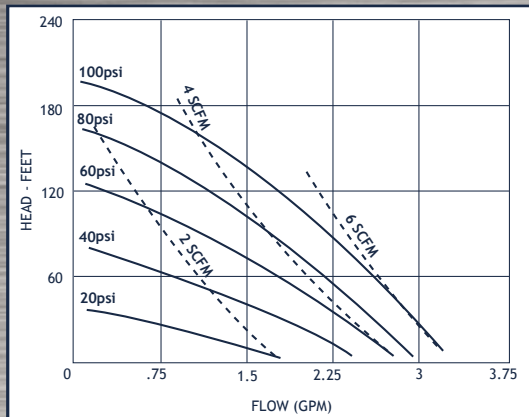


UP TO 3.4 GPM, 100 PSI

- Temperatures to 212°F
- Dry suction lift to 5'
- Wetted body and manifold materials available in Polypro, Kynar, aluminum and 316SS
- Teflon® diaphragms and elastomers
- Non-lubricated, non-stalling air valve
- Flapper style suction and discharge check valves
- Foot mounted vibration isolators standard

YAMADA

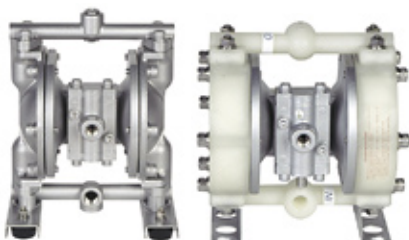


DP-10 Series (3/8") / DP-15 (1/2")

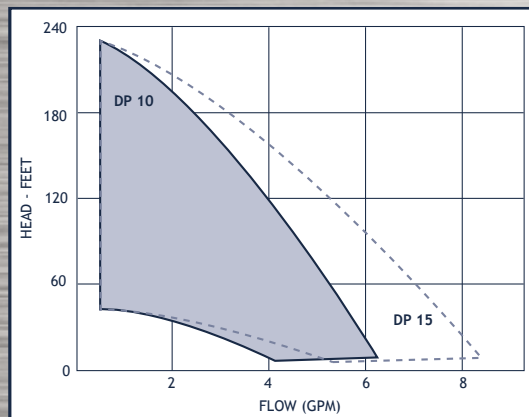


UP TO 8.3 GPM, 100 PSI

- Temperatures to 248°F
- Dry suction lift to 10'
- Wetted body and manifold materials available in Polypro, Kynar, aluminum (DP-10), DP-15 available in Polypro
- Diaphragm and elastomer options are Neoprene, Buna, Hytrel®, Santoprene, Viton® and Teflon®
- Lubricated, non-stalling air valve
- Ball style check valves (D-10), ball or flapper style check valves (DP-15)
- Foot mounted vibration isolators standard

YAMADA

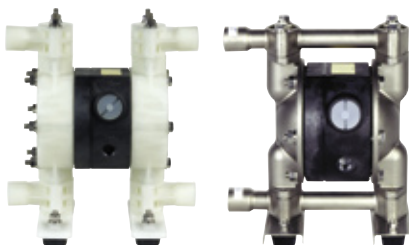


NDP-15 (1/2")

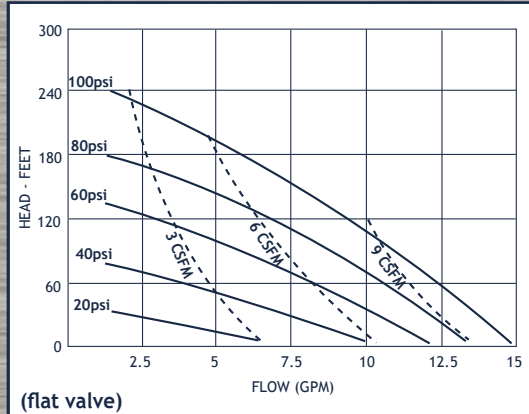


UP TO 15 GPM, 100 PSI

- Temperatures to 248°F
- Dry suction lift to 8'
- Wetted body and manifold materials available in Polypro, Kynar, aluminum and 316SS
- Diaphragm and elastomer options are Neoprene, Buna, Hytrel®, Santoprene and Teflon®
- Non-lubricated, non-stalling air valve
- Ball or flapper style check valves
- Foot mounted vibration isolators standard

YAMADA

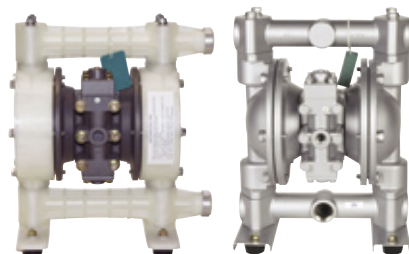

NDP-20 (3/4")

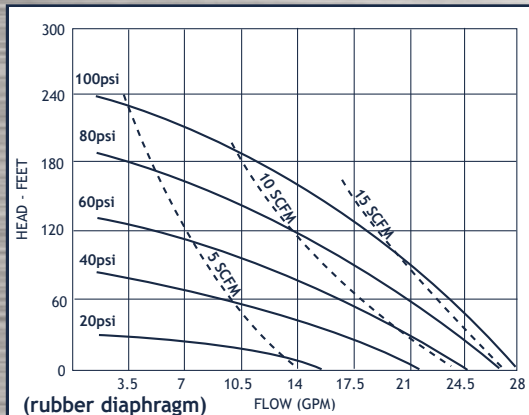

UP TO 28 GPM, 100 PSI

- Temperatures to 248°F
- Dry suction lift to 18'
- Wetted body and manifold materials available in Polypro, aluminum and 316SS
- Diaphragm and elastomer options are Neoprene, Buna, Viton®, EPDM, Hytrel®, Santoprene and Teflon®
- Non-lubricated, non-stalling air valve
- Ball style check valves
- Foot mounted vibration isolators standard