



# AIR OPERATED DIAPHRAGM PUMPS

## UP TO 49 GPM, 100 PSI

- Temperatures to 248° F
- Dry suction lift to 18'
- Wetted body and manifold materials available in Polypro, Kynar, aluminum, cast iron and 316SS
- Diaphragm and elastomer options are Neoprene, Buna, EPDM, Hytrel®, Santoprene, Viton® and Teflon®
- Non-lubricated, non-stalling air valve
- Ball style check valves
- Foot mounted vibration isolators standard

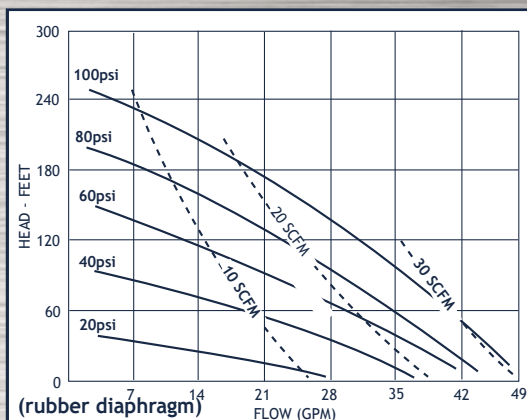


**YAMADA**

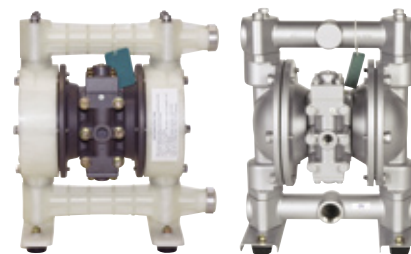


**NDP-25 (1")**

## UP TO 112 GPM, 100 PSI

- Temperatures to 248° F
- Dry suction lift to 18'
- Wetted body and manifold materials available in Polypro, Kynar, aluminum, cast iron, 316SS and **Hastelloy®**
- Diaphragm and elastomer options are Neoprene, Buna, EPDM, Hytrel®, Santoprene, Viton® and Teflon®
- Non-lubricated, non-stalling air valve
- Ball style check valves
- Foot mounted vibration isolators standard

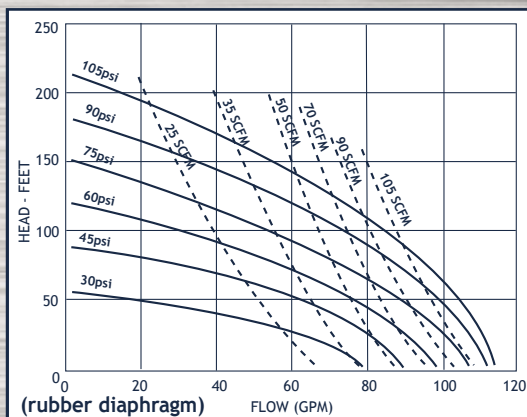


**YAMADA**

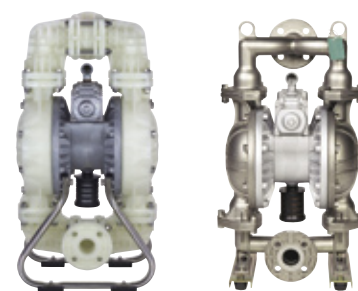


**NDP-40 (1 1/2")**

## UP TO 160 GPM, 100 PSI

- Temperatures to 248° F
- Dry suction lift to 19'
- Wetted body and manifold materials available in Polypro, Kynar, aluminum, cast iron, 316SS and **Hastelloy®**
- Diaphragm and elastomer options are Neoprene, Buna, EPDM, Hytrel®, Santoprene, Viton® and Teflon®
- Non-lubricated, non-stalling air valve
- Ball style check valves
- New solids handling flapper valve version available

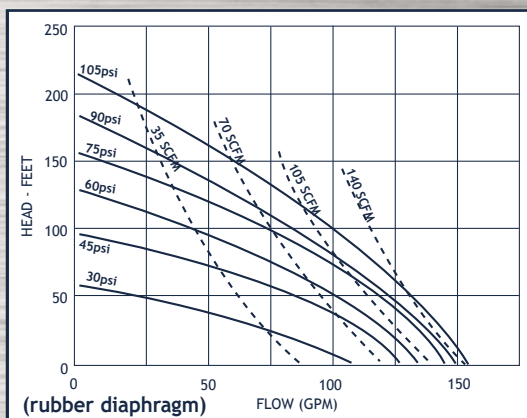


**YAMADA**

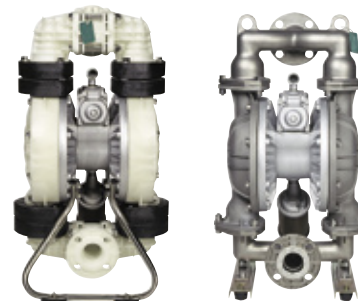


**NDP-50 (2")**

## UP TO 210 GPM, 100 PSI

- Temperatures to 248° F
- Dry suction lift to 19'
- Wetted body and manifold materials available in Polypro, aluminum, cast iron, 316SS and **Hastelloy®**
- Diaphragm and elastomer options are Neoprene, Buna, EPDM, Hytrel®, Santoprene, Viton®, and Teflon®
- Non-lubricated, non-stalling air valve
- Ball style check valves
- Foot mounted vibration isolators standard

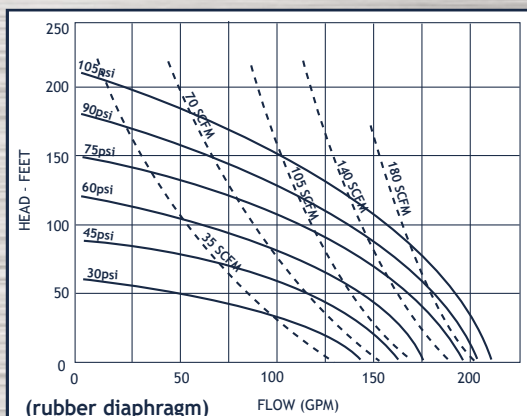

**YAMADA**

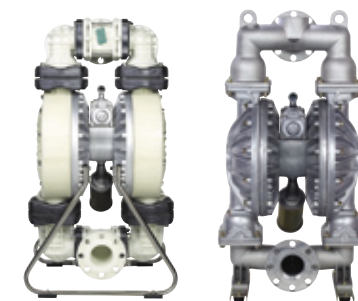

**NDP-80 (3")**