


# ELECTRIC DIAPHRAGM PUMPS

## UP TO 1 GPM, 35 PSI

- 35 psi demand switch or manually operated
- Temperatures to 110° F
- Self-priming to 2.5'
- Ports: 3/8" barb
- Voltages: 12 and 24 vdc, 115 vac
- Wetted parts:  
Housing: Polypropylene  
Diaphragm: Santoprene  
Valves: Viton® or EPDM  
Valve Springs: 316SS

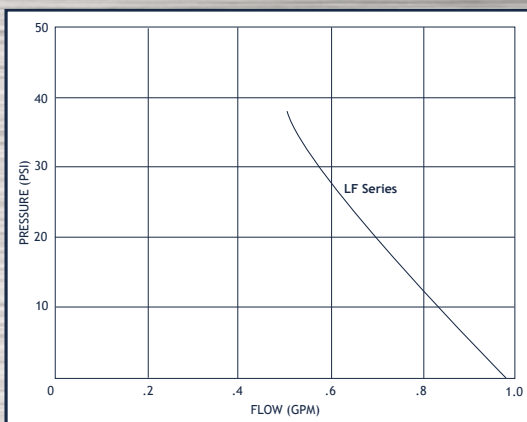


## FLOJET



LF Series

## UP TO 2.35 GPM, 60 PSI

- 60 or 35 psi demand switch, manually operated or with internal by-pass
- Temperatures to 130° F
- Self-priming to 8'
- Ports: 3/8" FPT
- Voltages: 12, 24 and 32 vdc or 115 and 230 vac 50/60 hz
- Wetted parts:  
Housing: Polypropylene (std) or Nylon  
Diaphragm/Valves: Santoprene, Viton®, EPDM or Buna
- Exposed Metal: 316SS
- **Being replaced by the Duplex II Series**

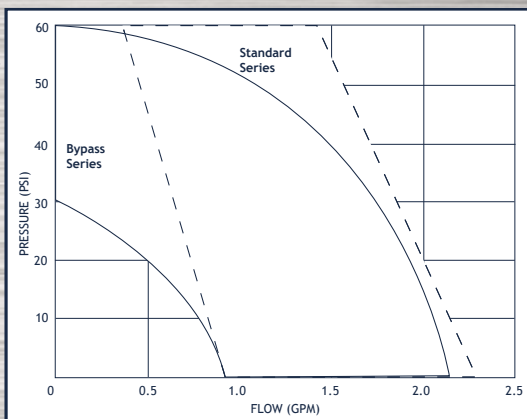


## FLOJET



2100 Series

## UP TO 2 GPM, 100 PSI

- 100 or 70 psi demand switch
- Temperatures to 160° F
- Self-priming to 8'
- Ports: 1/4" FPT
- Voltages: 12, 24 and 32 vdc or 115 and 230 vac 50/60 hz
- Wetted parts:  
Housing: Polypropylene (std) or Nylon  
Diaphragm/Valves: Santoprene, Viton®, EPDM or Buna
- **Being replaced by the Duplex II Series**

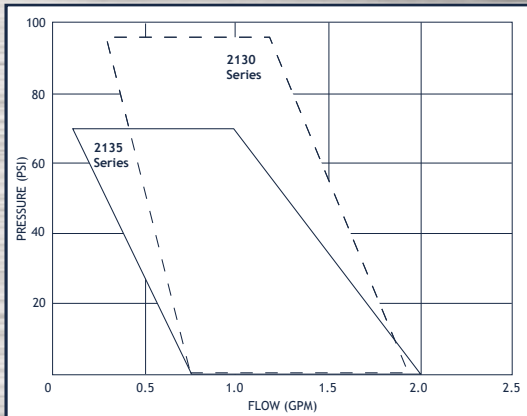


## FLOJET



2130, 2135 Series

## UP TO 2.2 GPM, 100 PSI

- 15 to 100 psi demand switch or internal by-pass
- Temperatures to 130° F
- Self-priming to 8'
- Ports: 3/8" FPT
- Voltages: 12 and 24 vdc or 115 and 230 vac 50/60 hz
- Wetted parts:  
Housing: Polypropylene  
Diaphragm/Valves: Santoprene, Viton®, EPDM or Buna
- **Replacing 2100 Series**

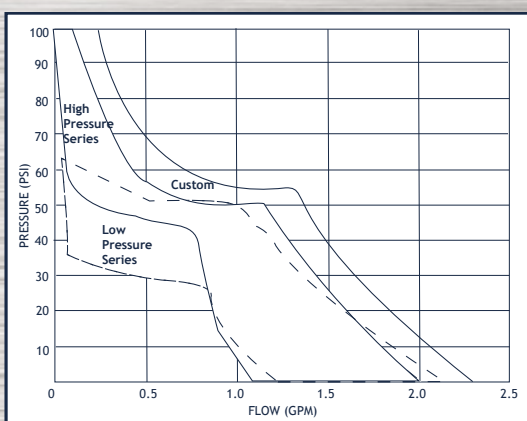

## FLOJET



Duplex II Series