


# SPECIALTY DIAPHRAGM AND OSCILLATING PUMPS

## FLOJET



Medium Flow, Medium Pressure

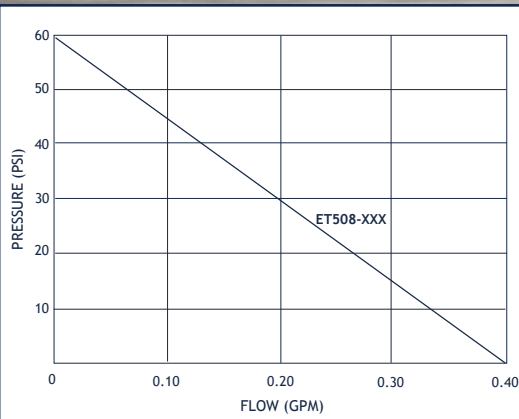


### UP TO .40 GPM, 55 PSI

- Medium pressure oscillating pump
- Temperatures to 160°F
- Self-priming to 6'
- Ports: 1/4" barb (1/8" FPT available)
- Voltages: 115 vac, 60 hz and 230 vac, 50 hz
- Power Consumption: 46 watts
- Wetted Parts:  
Housing: non-metallic Minlon  
Elastomers: EPDM, Viton®  
Piston/Spring: stainless steel

## FLOJET



High Pressure

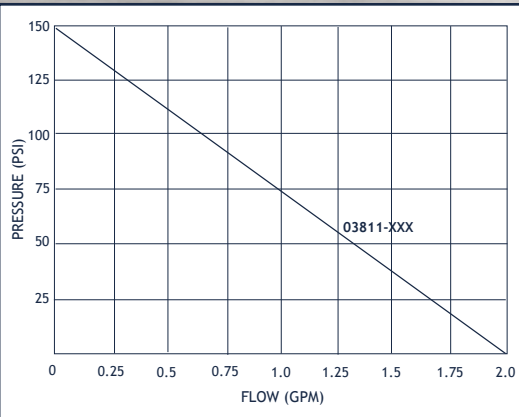


### UP TO 2.0 GPM, 150 PSI

- High pressure demand diaphragm pump
- 140 psi Demand switch
- Temperatures to 160°F
- Internal bypass eliminates cycling
- Ports: 3/8" FPT
- 115 or 230 vac
- Nylon body, Santoprene diaphragm, EPDM or Viton® valves

## SHURFLO



High Volume

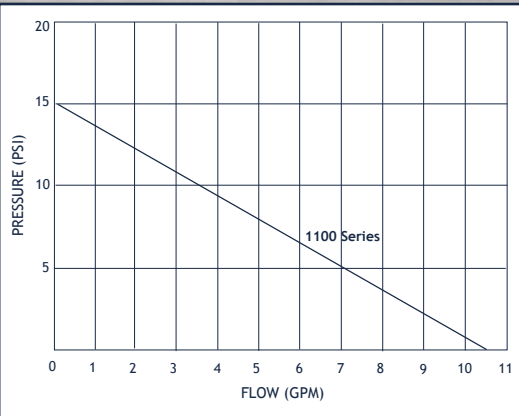


### UP TO 10.7 GPM, 15 PSI

- High volume diaphragm pump
- Self-priming to 12'
- Internal bypass for over pressure protection
- Able to handle both low and high viscosity liquids
- Polypropylene housing, santoprene diaphragm, EPDM or Viton® valves
- Wide variety of accessories available

## GRI



High Flow, Low Pressure

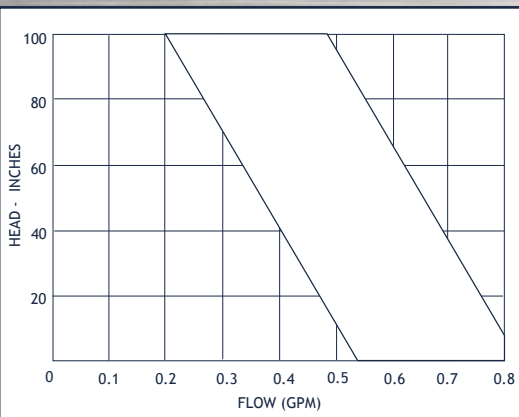

### UP TO .8 GPM, 8.3' TDH

- High flow oscillating pump
- Temperatures to 104°F
- Self-priming to 4'
- Ports: 1/2" barb
- Voltages: 115 and 230 vac 50/60 hz
- Power Consumption: 20-26 watts
- Wetted Parts:  
Housing: Polypropylene  
Bellows: EPDM