


UP TO 1000 GPM, 675 PSI

- Temperatures to 400° F
- Viscosities to 1,000,000cp
- Metal Component Options: cast iron/tool steel/chrome cast iron/stainless steel, or all stainless
- Pin joint, over-size pin joint, or gear joint designs
- Elastomers: Buna, Viton®, Natural Rubber or EPDM




ROPER

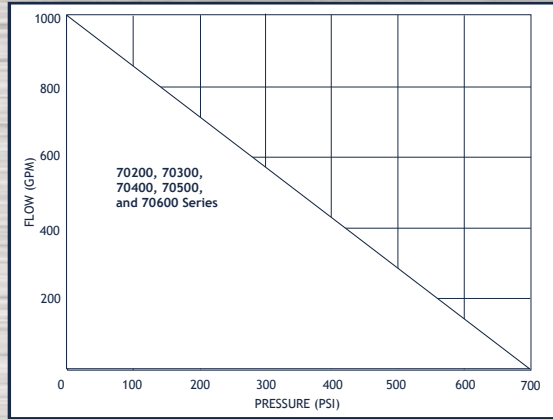


70200, 70300, 70400, 70500 and 70600 Series

UP TO 1000 GPM, 260 PSI

- Temperatures to 400° F
- Rectangular open throat suction inlet for hopper feed
- Optional auger assembly available for positive suction feed of high viscosity or high solid-content fluids
- Metal Component: cast iron/tool steel/chrome
- Seal Types: packing or multiple mechanical seal options
- Elastomers: Buna, Viton®, natural rubber or EPDM

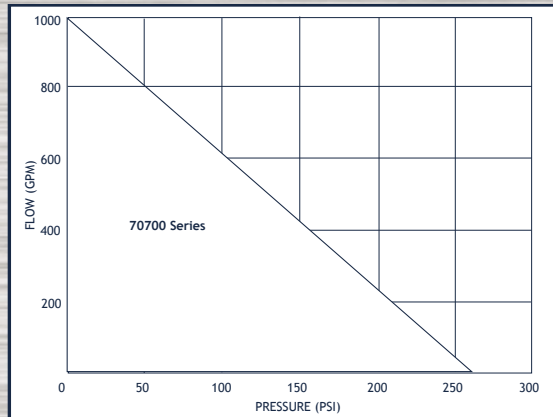


ROPER

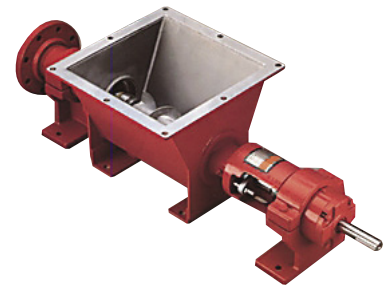

70700 series Open Throat

UP TO 200 GPM, 175 PSI

- Temperatures to 350° F
- Viscosities to 100,000cp
- Meets 3A, USDA and FDA standards
- Wetted metal parts are polished 316SS
- ACME thread or tri-clamp connections
- Elastomers: Buna, Viton®, natural rubber, EPDM or Teflon®

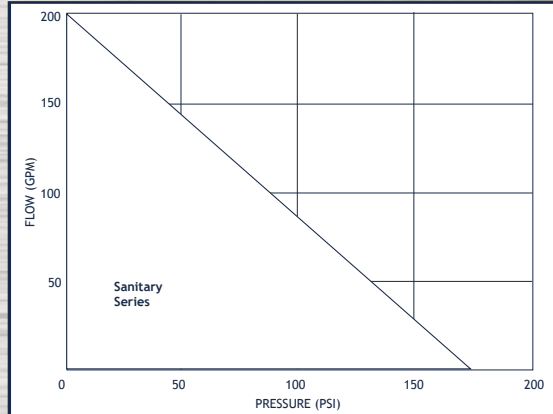


LIBERTY



Sanitary

UP TO 15 GPM, 80 PSI

- Temperatures to 160° F
- Designed to macerate and transfer sewage
- Requires flooded suction
- Ports: 4" MPT inlet, 1 1/4" FPT outlet
- Mounting flange: 56C
- Housing: cast iron
- Seal Type: carbon/ceramic Buna mechanical seal
- Cutter: hardened steel

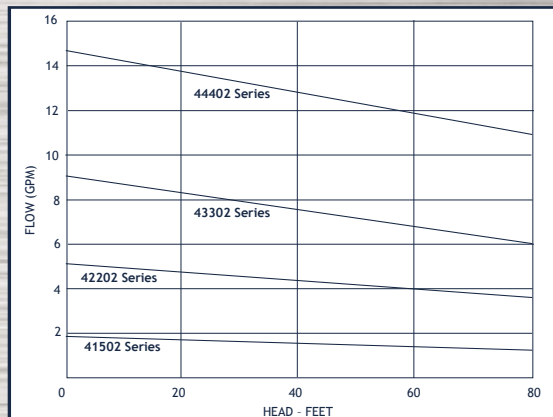

ROBBINS and MYERS



Grinder / Macerator Series