


UP TO 750 GPH, 260 PSI

- Temperatures to 194° F
- High flow rates in a compact design
- All 316SS construction
- Carbon graphite internal components
- NEMA 56, 143TC and 145TC mountings
- Maximum system pressure: 360 psi




FLUID-O-TECH

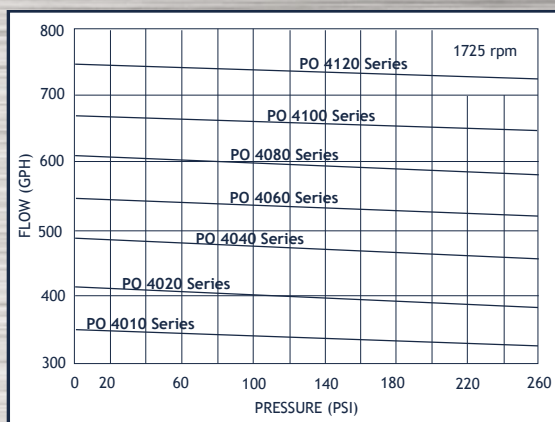

4000 Series

UP TO 160 GPH, 200 PSI

- Temperatures to 140° F
- Brass or stainless steel construction
- With or without bypass
- Carbon graphite internal components
- **Magnetic drive, sealless design**
- NEMA 56C motor mounting available
- Maximum system pressure: 260 psi
- High volume series up to 290 gph now available

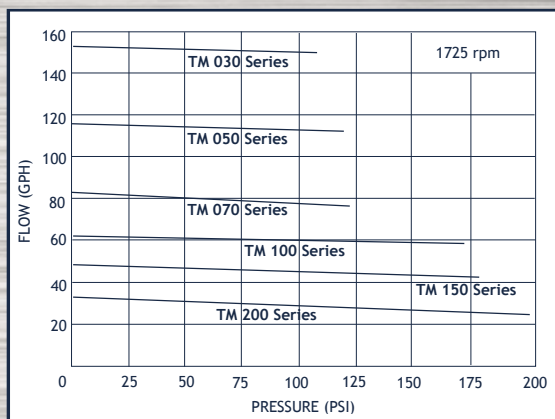


FLUID-O-TECH



TM Mag Drive

UP TO 160 GPH, 260 PSI

- Variable speed unit with controller
- Carbon graphite internal components
- NSF listed option
- 110V 60 hz and 220 volt 50 hz input power options
- Pump head 303SS
- **Sealless design**
- NSF approved option
- High volume series up to 30 gph now available

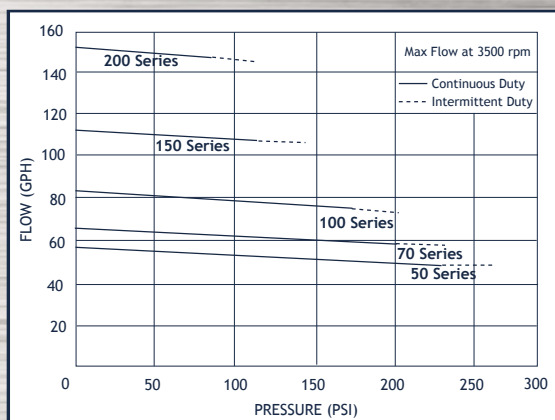


FLUID-O-TECH



TMFR Variable Speed Drive

UP TO 660 GPH, 250 PSI

- Carbon graphite internal components
- Brass and 303SS construction
- With or without bypass
- With or without strainer
- Popular OEM pumps for welders, beverage dispensing, chillers, coolers, etc.

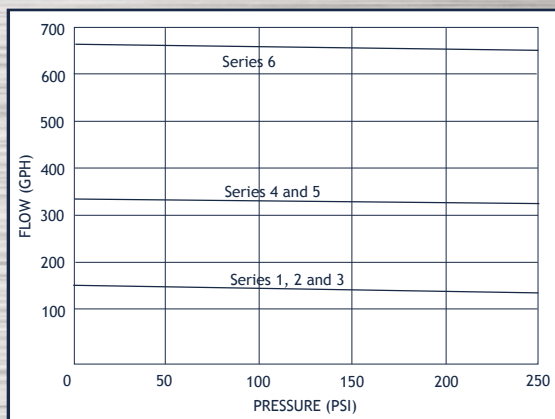

PROCON



Clamp Mount