


END SUCTION CENTRIFUGALS

PRICE



LT25 Series

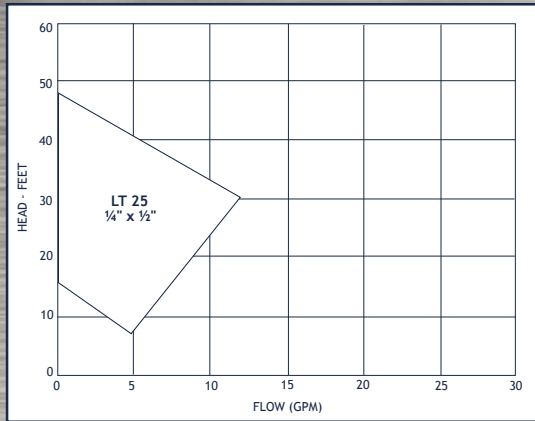


UP TO 12 GPM, 48' TDH

- Temperatures to 300°F
- Semi-open impeller
- Housing Construction: 316SS or bronze
- Multiple mechanical seal options
- Requires flooded suction
- Drive Options: single and three phase, ODP, TEFC, explosion proof and custom configurations

PRICE



CD 100 and CD 150 Series

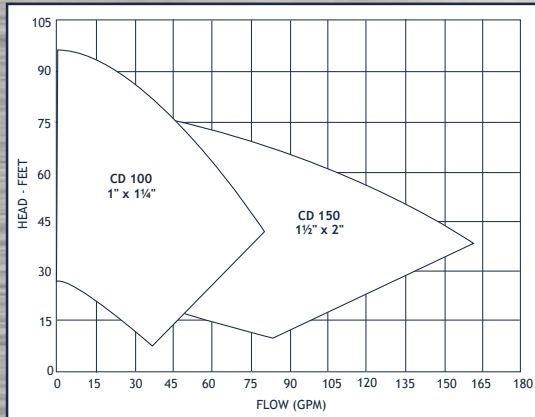


UP TO 160 GPM, 100' TDH

- Temperatures to 300°F
- Semi-open impeller
- Housing Construction: 316SS, cast iron or bronze
- Multiple mechanical seal options
- Requires flooded suction
- Drive Options: pedestal mount, hydraulic, pneumatic, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations

PRICE



RC200 and RC 300 Series

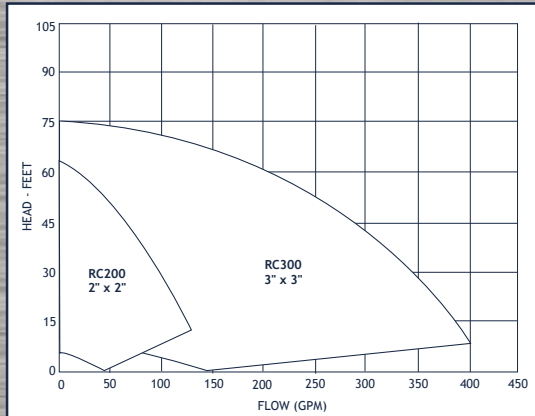


UP TO 400 GPM, 75' TDH

- Temperatures to 300°F
- Semi-open impeller
- Housing Construction: All iron, bronze fitted cast iron, all bronze, and all 316SS
- Multiple mechanical seal options
- Requires flooded suction
- Drive Options: pedestal mount, hydraulic, pneumatic, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations

PRICE



XL/XJ (flanged)
and XT Series (threaded)

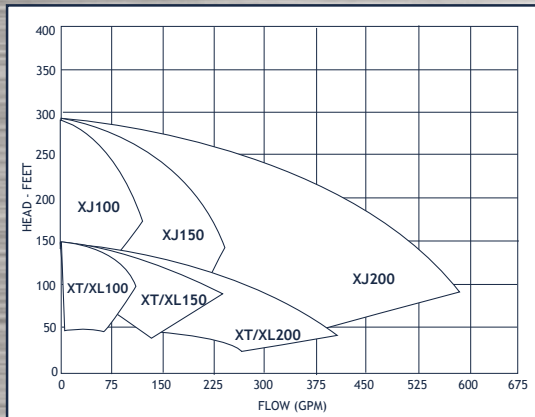

UP TO 500 GPM, 300' TDH

- Temperatures to 300°F
- Enclosed impeller
- 150 lb. centerline ANSI flanges or NPT threaded ports
- Housing Construction: 316SS or iron
- Multiple mechanical seal options
- Requires flooded suction
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof, and custom configurations