


# END SUCTION CENTRIFUGALS

## UP TO 56 GPM, 62' TDH

- Temperatures to 200° F
- Semi-open impeller
- Housing Construction: cast iron or bronze
- Multiple mechanical seal options
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations

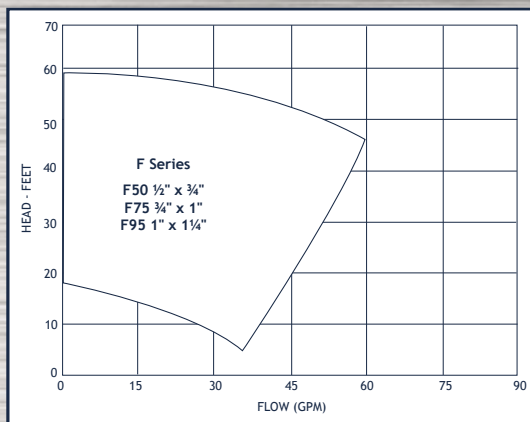


## PRICE



F50, F75 and F95 Series

## UP TO 95 GPM, 69' TDH

- Temperatures to 300° F
- Semi-open impeller
- Housing Construction: bronze
- Elastomer Options: Buna, Viton® and Teflon®
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations
- Ports 500 3/8" x 3/8"  
600 1/2" x 3/4"  
700 1" x 1 1/4"

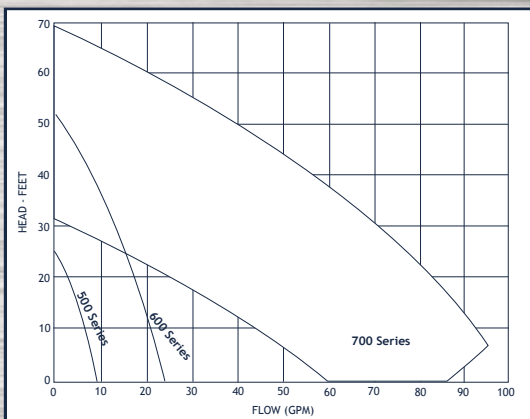


## OBERDORFER



500, 600 and 700 Series

## UP TO 90 GPM, 65' TDH

- Temperatures to 200° F
- Semi-open impeller
- Housing Construction: 316SS, cast iron or bronze
- Buna or Viton® mechanical seal
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations
- Ports: 368X 1/2" x 3/4"  
370X 3/4" x 1"  
369X 1" x 1 1/4"

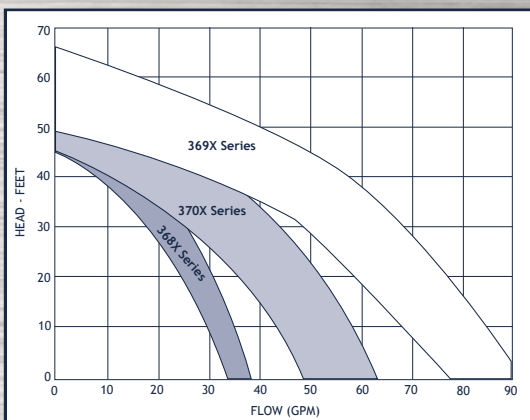


## AMT



368X and 370X Series

## UP TO 156 GPM, 140' TDH

- Temperatures to 200° F
- Enclosed impeller, high head, high volume hydraulics
- Housing Construction: Deep drawn 304SS, investment cast stainless steel impeller
- Elastomer Options: Viton® standard, Buna optional
- Drive Options: Pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

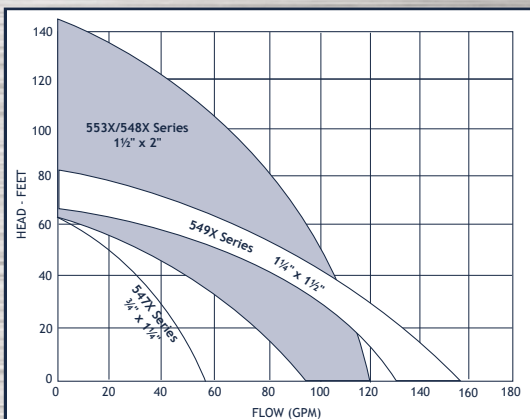

## AMT



549X and 553X Series