


SELF-PRIMING CENTRIFUGALS

PRIMETIME



Compact 3/4" 316 Stainless

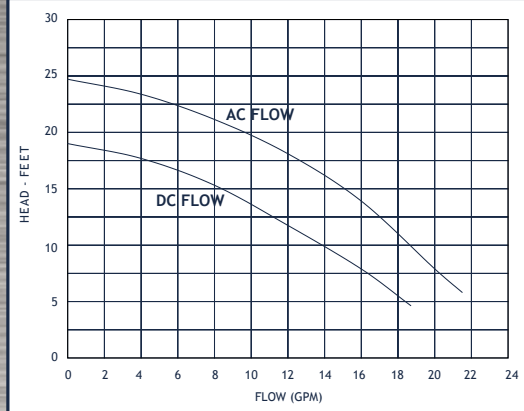


UP TO 21 GPM, 24' TDH

- Temperatures to 230° F
- Semi-open impeller
- Self-priming to 12'
- Construction: 316SS
- Seal Options: Viton® mechanical
- Drive Options: 115/230 vac 50/60 hz, 12 vdc, 24 vdc, open or TENV
- Compact design (H x W x L)
AC 6.24" x 4.63" x 9.14"
DC 6.24" x 4.63" x 8.73"

OBERDORFER



1" Bronze or Aluminum

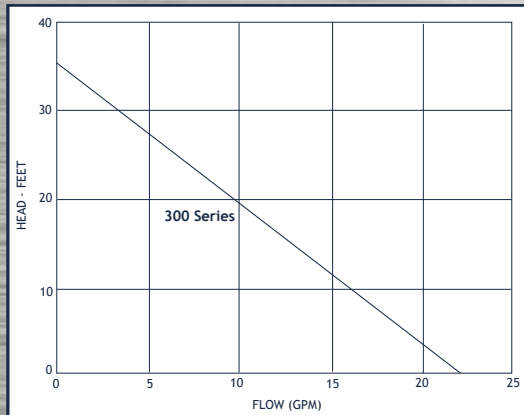


UP TO 22 GPM, 35' TDH

- Temperatures to 300° F
- Semi-open impeller
- Self-priming to 20'
- Construction: bronze
- Seal Options: Buna, Viton® and Teflon®
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations

OBERDORFER



1 1/2" Bronze

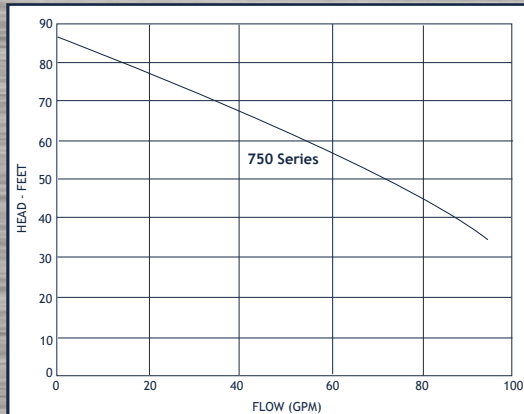


UP TO 94 GPM, 90' TDH

- Temperatures to 300° F
- Open impeller
- Self-priming to 20'
- Construction: bronze
- Seal Options: Buna, Viton® and Teflon®
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

PRICE



1 1/2" 316SS or Cast Iron

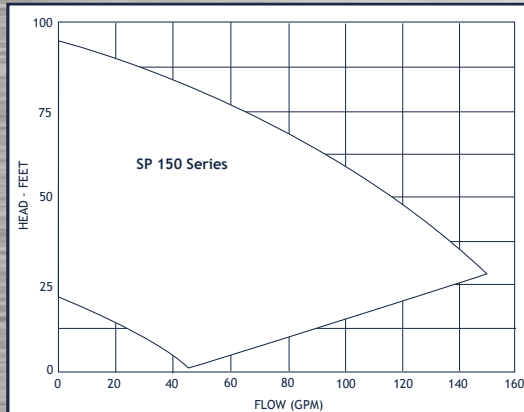

UP TO 150 GPM, 95' TDH

- Temperatures to 250° F
- Semi-open impeller
- Self-priming to 20'
- Construction: 316SS and cast iron
- Multiple Seal Options: Buna, Neoprene, Viton®, EPR, Teflon®, silicon or tungsten carbide faces, and seal flush
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations