



BRONZE AND DUCTILE IRON GEAR PUMPS

OBERDORFER

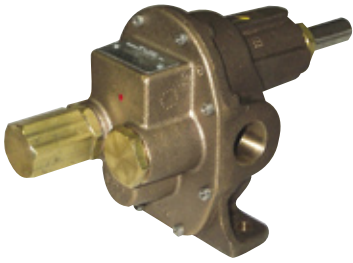


N1000 - N9000

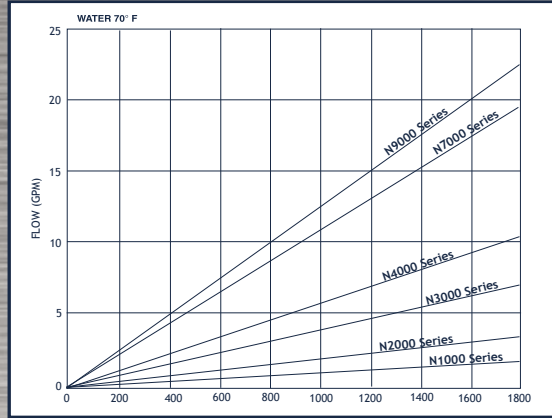


UP TO 23 GPM, 100 PSI (150 PSI Intermittent)

- Bronze housing and gears
- Packing standard, lip seal or mechanical seal options
- Available with or without relief valve
- Foot mounted for direct or pulley drive
- Drive Options: Electric motor, gas or diesel engine, hydraulic or air motor

OBERDORFER




N11HDM - N26HDM

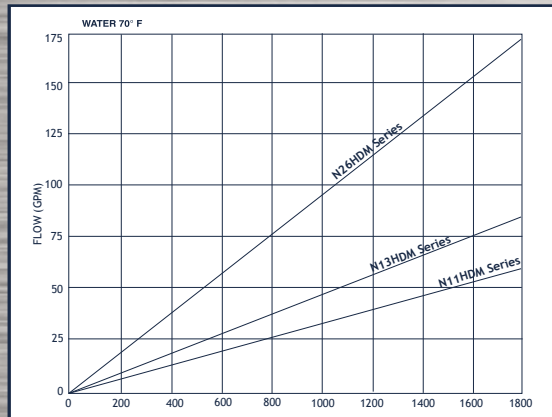


UP TO 174 GPM, 100 PSI (150 PSI below 900 rpm)

- Bronze housing and gears
- Mechanical seal, lip seal or packing options
- Carbon bearings with outboard ball bearing on drive shaft
- Drive Options: Electric motor, gas or diesel engine, hydraulic or air motor

OBERDORFER

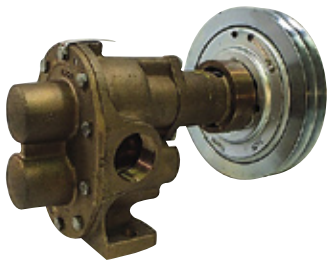

Clutch Drive

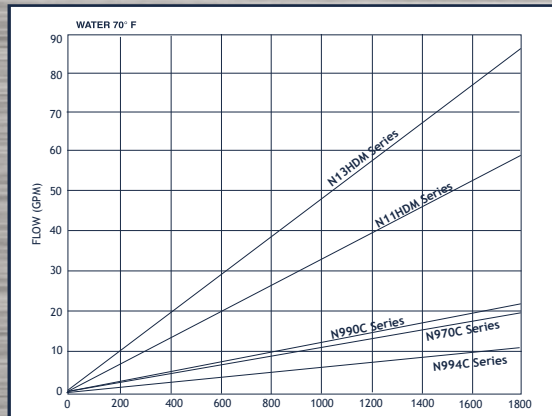


UP TO 85 GPM, 150 PSI

- Bronze housing and gears
- Lip seal or mechanical seal
- Relief valve option on smaller sizes
- External ball bearing construction
- Carbon bearings
- 12, 24 or 32 vdc clutch
- 7" double groove clutch pulley
- Can be pulley driven by electric motor, gas or diesel engine, hydraulic or air motor

OBERDORFER



Ductile Iron

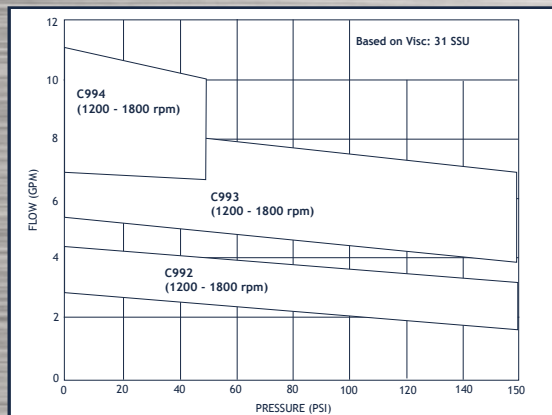

UP TO 10.5 GPM, 150 PSI

- Ductile iron housing
- Stainless steel shaft
- Steel gear
- Buna mechanical seal, Viton® option
- Carbon bearings
- Adapter kits available for 48, 56, 56C, 143/145TC frame electric motors