


# TRASH AND DREDGE CENTRIFUGALS

## AMT



2" - 4" Sewage and Trash Pumps

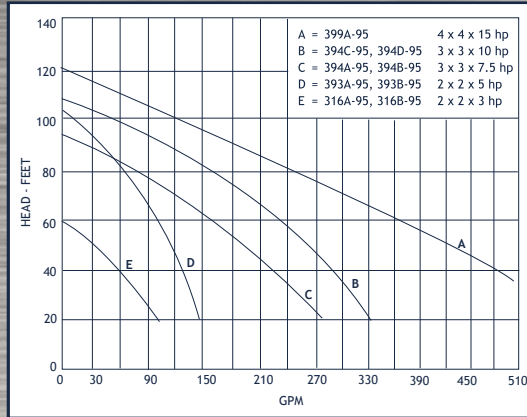


## UP TO 510 GPM, 120' TDH

- Temperatures to 180° F
- Self-priming to 20'
- Semi-open stainless steel impeller
- Solids handling
  - 2" Ports - 1" diameter
  - 3" Ports - 1 1/2" diameter
  - 4" Ports - 2" diameter
- Construction: cast iron with front cleanout (3" and 4" sizes)
- Mounting configurations are either close coupled, electric or pedestal

## AMT



2", 3" and 4" Trash Pumps

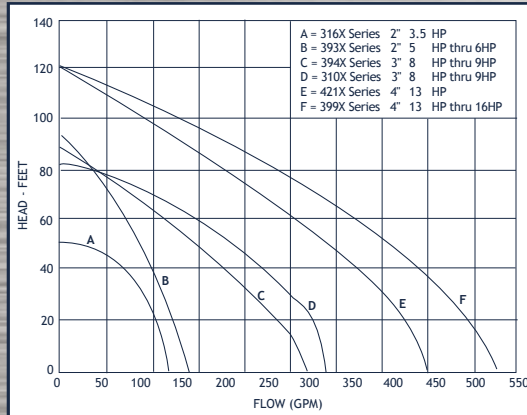


## UP TO 630 GPM, 120' TDH

- Temperatures to 180° F
- Self-priming to 20'
- Semi-open impeller passes up to 2" solids
- Construction: cast iron or cast aluminum
- Hard faced mechanical seal standard
- Engine Options: Honda, Briggs and Stratton, or Vanguard gasoline
- Roll cage or cart mounted configurations

## Gorman-Rupp



2" - 6" Trash Pumps

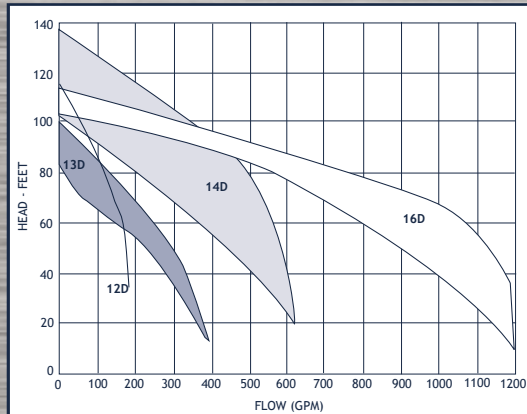


## UP TO 1200 GPM, 138' TDH

- Temperatures to 160° F
- Self-priming to 25'
- Ductile iron impeller with replaceable steel wearplate
- Construction: cast iron or cast aluminum
- Front clean-out design
- Engine Options: Briggs and Stratton, Yanmar, Honda, Kohler, Wisconsin, Hatz and Deutz gas or diesel
- Roll cage or cart mounted configurations

## MP PUMPS



2" and 3" 2CT Series

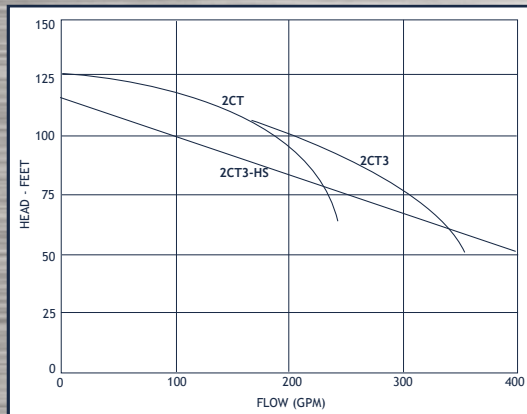

## UP TO 400 GPM, 125' TDH

- Solids handling up to 1.5" diameter
- Front clean-out design
- Cast iron construction with ductile iron impeller
- 304SS shaft sleeve
- Viton® mechanical seal
- Closed coupling to NEMA C-Face motors or pedestal mounting for direct drive