


# MAGNETIC DRIVE CENTRIFUGALS

## MARCH



320 Series

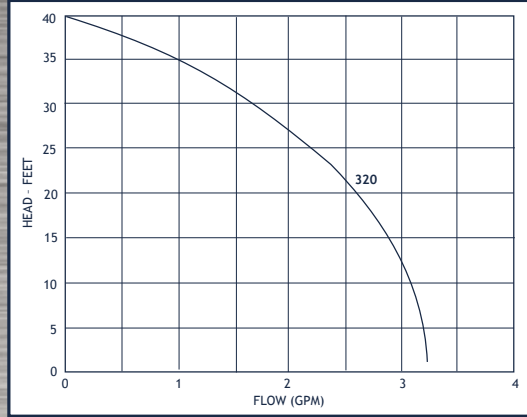


## UP TO 3.3 GPM, 40' TDH

- Temperatures to 190°F
- Enclosed impeller
- Construction: glass filled Polypro
- Materials in contact with solution: glass filled Polypro, ceramic and Viton®
- Common models: (all open motors, and 115 or 230 vac)  
320-AP-MD: 5/8" x 1/2" Barbs  
320-CP-MD 1/2" x 3/8" MPT

## MARCH



3CP-MD Series

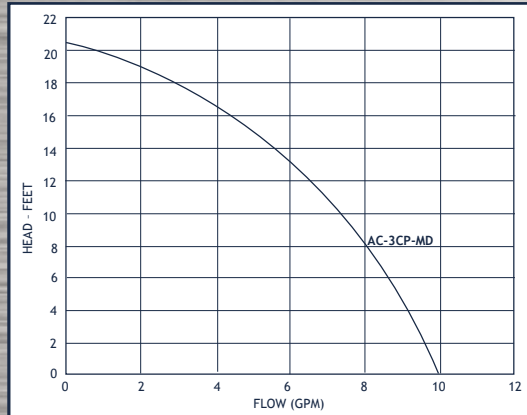


## UP TO 10 GPM, 20.5' TDH

- Temperatures to 190°F
- Open impeller
- Construction: Polypro or Kynar
- Materials in contact with solution: AC (Polypro, ceramic magnet, ceramic and Buna), BC (Polypro or Kynar, ceramic and Viton®)
- Common models: (115 or 230 vac with 3/4" FPT x 1/2" MPT)  
AC-3CP-MD: Polypro, open motor  
BC-3CP-MD: Polypro, TE motor  
BC-3K-MD: Kynar, TE motor

## MARCH



LC-3CP-MD Submersible Series

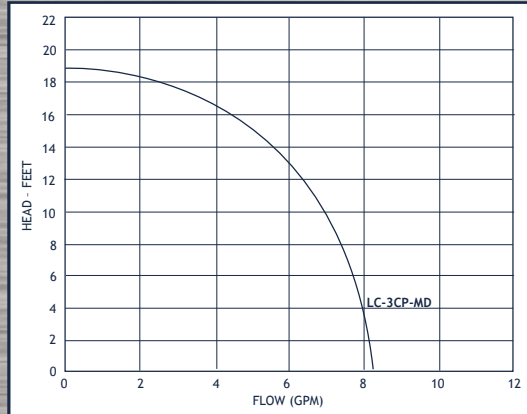


## UP TO 8.5 GPM, 19' TDH

- Temperatures to 130°F
- Open impeller
- Construction: Polypro
- Materials in contact with solution: glass filled Polypro, epoxy, 316SS, Buna, ceramic
- Common models:  
LC-3CP-MD, 115 or 230 vac,  
50 or 60 hz, TE/Submersible motor,  
3/4" FPT x 1/2" MPT

## MARCH



140 Series

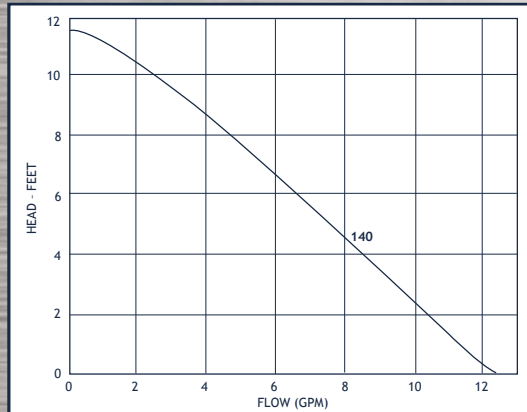

## UP TO 12.5 GPM, 11.5' TDH

- Temperatures to 190°F
- Open impeller
- Construction: glass filled Polypro
- Materials in contact with solution: glass filled Polypro, Buna, ceramic and ceramic magnet
- Common models: (open motors)  
140-1: 115 vac, 1 1/8" x 7/8" Barbs  
140-2: 230 vac, 1 1/8" x 7/8" Barbs