


MAGNETIC DRIVE CENTRIFUGALS

UP TO 125 GPM, 95' TDH

- Temperatures to 250° F
- Enclosed impeller
- 2" MPT x 1 1/2" MPT ports
- Construction: Polypropylene, Kynar or 316SS
- Materials in contact with solution: housing material, ceramic, Viton® and carbon bushing (8C uses Teflon®/Ryton® bushing)
- Common models: (230/460 vac) TE-8C-MD: Polypro, with Kynar rear housing, TEFC motor

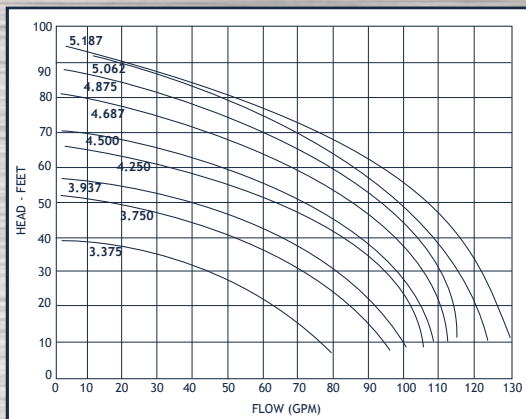


MARCH



TE-8 Series

UP TO 210 GPM, 162' TDH

- Temperatures to 220° F
- Enclosed impeller
- 3" MPT x 2" MPT ports
- Construction: Kynar
- Materials in contact with solution: Kynar, ceramic, Viton® and carbon bushing
- Common models: TE-10K-MD: Kynar, TEFC, 230/460 vac motor

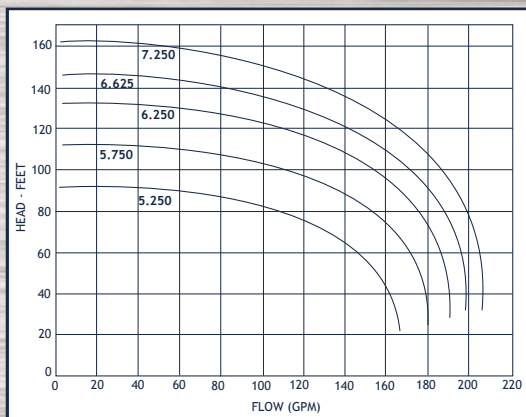


MARCH



TE-10 Series

UP TO 25 GPM, 27' TDH

- Temperatures to 203° F
- Housing Options: Vectra, Noryl, Polypro, Ryton® and NSF certified
- Custom configurations available for OEM equipment
- Available in 115 vac, 1 phase, 50/60 hz

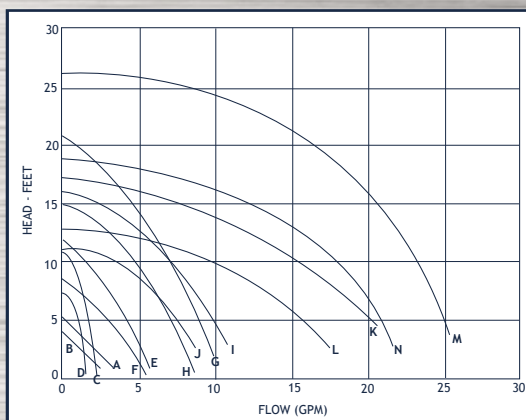


GRI



Compact Magnetic Drive

UP TO 8 GPM, 46' TDH

- Temperatures to 250° F
- Pressures to 20 psi
- 3/8" NPT Ports
- System pressure to 200 psi
- Wetted parts: 316SS body (Hastelloy® body available), PTFE bushings and gasket
- AC, DC and air motor available

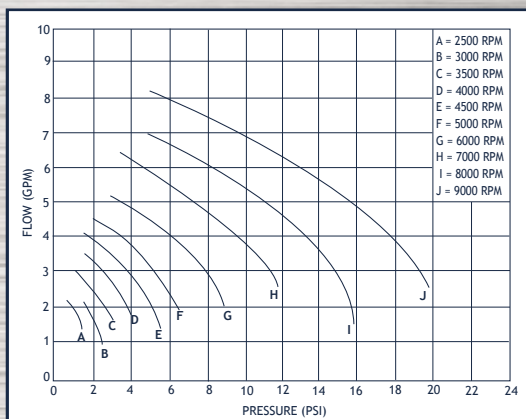

MICROPUMP



101 Series - 316SS Mini Pump