


MAGNETIC DRIVE CENTRIFUGALS

FINISH THOMPSON



DB Series, Sizes 6-10

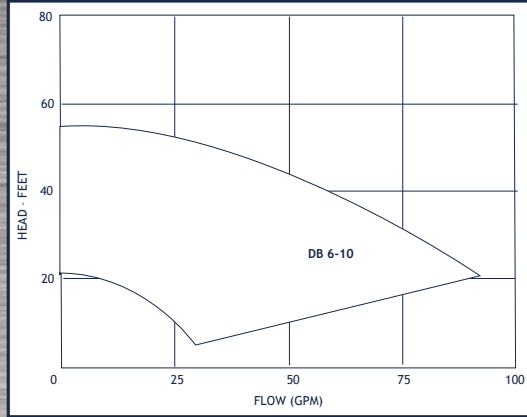


UP TO 96 GPM, 67' TDH

- Temperatures to 220° F
- Can run dry without damage
- Polypropylene or PVDF construction
- Close coupled design to NEMA or IEC motors
- Specific gravities to 1.85
- Drive options: single or three phase, ODP, TEFC, explosion proof motors and custom configurations

FINISH THOMPSON



DB Series, Sizes 11 and 15

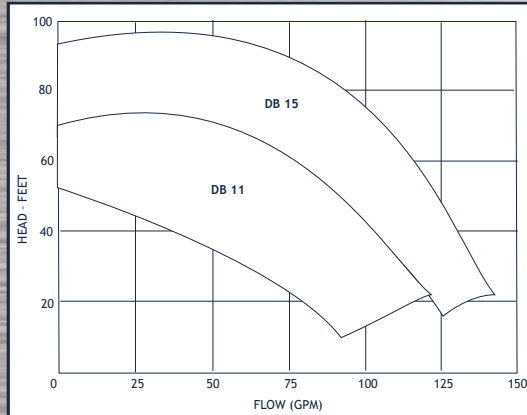


UP TO 136 GPM, 98' TDH

- Temperatures to 220° F
- Can run dry without damage
- Polypropylene or PVDF construction
- Close coupled design to NEMA or IEC motors
- Specific gravities to 1.85
- Drive options: single or three phase, ODP, TEFC, explosion proof motors and custom configurations

FINISH THOMPSON



DB Series, Size 22

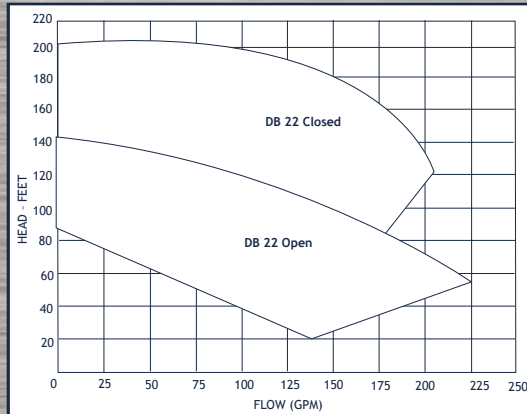


UP TO 220 GPM, 201' TDH

- Temperatures to 220° F
- Can run dry without damage
- Polypropylene or PVDF construction
- Close coupled design to NEMA or IEC motors
- Specific gravities to 1.85
- Drive options: single or three phase, ODP, TEFC, explosion proof motors and custom configurations

FINISH THOMPSON



SP Series

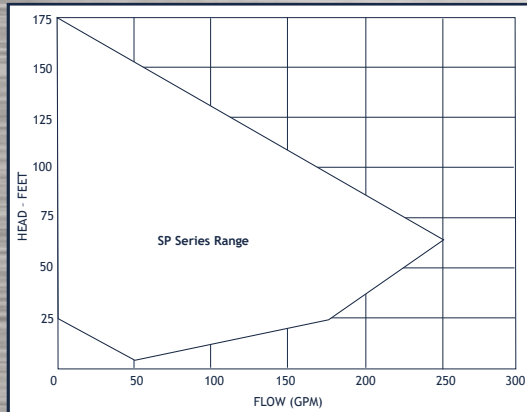

UP TO 253 GPM, 175' TDH

- Self-priming up to 25'
- Temperatures to 220° F
- Polypropylene or PVDF construction
- Close coupled design to NEMA or IEC motors
- Specific gravities to 1.85
- Drive options: single or three phase, ODP, TEFC, explosion proof motors and custom configurations