


MAGNETIC DRIVE CENTRIFUGALS

UP TO 15 GPM, 34' TDH

- Temperatures to 150° F
- Specific gravity to 1.1
- Viscosity to 100 SSU
- Wetted parts: Polypropylene housing, Titanium, Barium Ferrite, Buna-N
- 115 vac corded motors standard
- Rated mildly corrosive

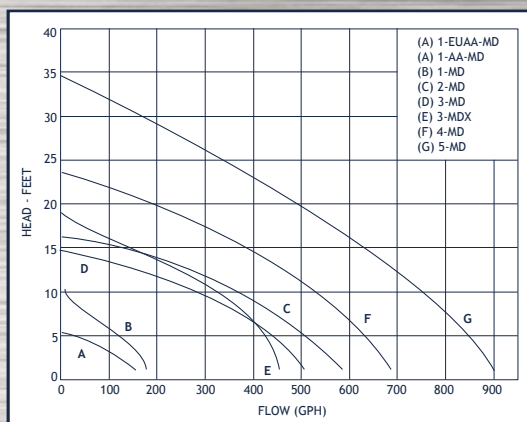


LITTLE GIANT



MD Series

UP TO 22 GPM, 30' TDH

- Temperatures to 150° F
- Specific gravity to 1.1
- Viscosity to 100 SSU
- Wetted parts: Polypropylene housing, ceramic shaft, Buna-N o-ring
- 115 vac corded motors standard
- Rated highly corrosive

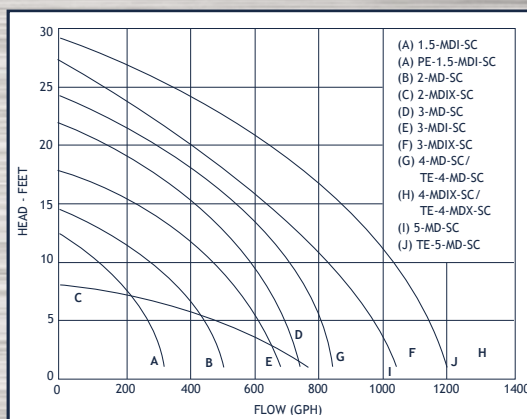


LITTLE GIANT



MD-SC Series

UP TO 20 GPM, 30' TDH

- Temperatures to 200° F
- Specific gravity to 1.1
- Viscosity to 100 SSU
- Wetted parts: Ryton® housing, ceramic shaft, Viton® o-ring
- Carbon bushing
- 115 vac corded motors standard
- Rated highly corrosive

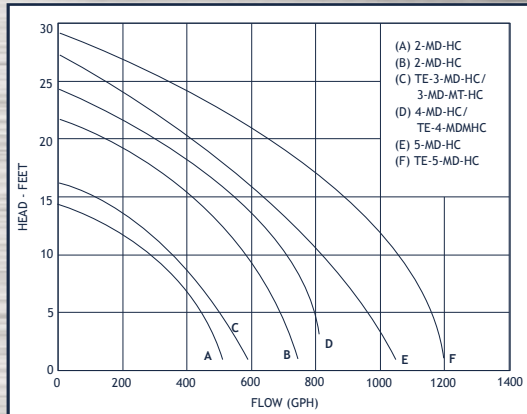


LITTLE GIANT



MD-HC Series

UP TO 53 GPM, 57' TDH

- Specific gravity to 1.1 (higher with impeller trim)
- Viscosity to 100 SSU
- Temperatures to: 150° F on MD-SC, 180° F on MD-HC, 200° F on MD-CK
- Wetted parts: ceramic shaft, carbon bushing, Viton® o-ring
- MD-SC Polypropylene housing, MD-HC Ryton® housing, MD-CK Kynar housing
- TEFC motor
- Rated mild-highly corrosive

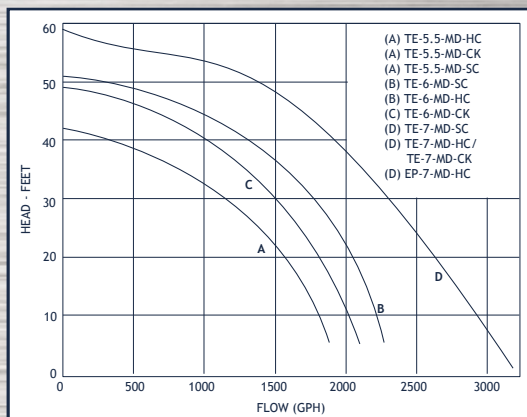

LITTLE GIANT



MD-SC, HC and CK Series