


MULTI-STAGE CENTRIFUGALS

UP TO 700 GPM, 1150' TDH

- Temperatures to 300° F
- "15 minute" replaceable mechanical seal available in carbon/ceramic or sc/sc
- Interchangeable dimensionally and hydraulically with most Grundfos CR series pumps
- Single and three phase, ODP, TEFC, explosion proof motors
- New "i-alert™" vibration monitoring device option to prevent sudden failure

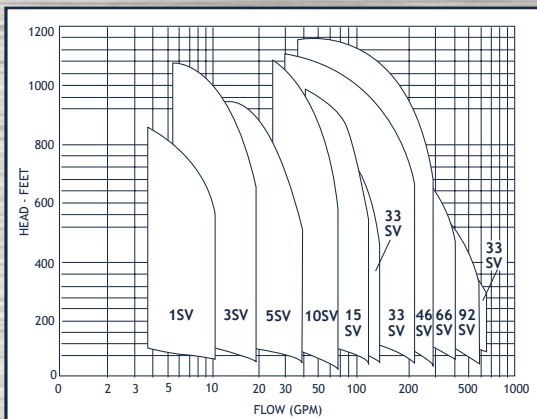


GOULDS WATER TECHNOLOGY



ESV Multi-Stage Centrifugal Series

UP TO 100 GPM, 750' TDH

- Temperatures to 180° F
- Brass suction and discharge head
- 300 Series SS shaft and bowls
- Thermoplastic impellers and diffusers
- Buna mechanical seal
- Motor options are single or three phase, ODP or TEFC enclosures

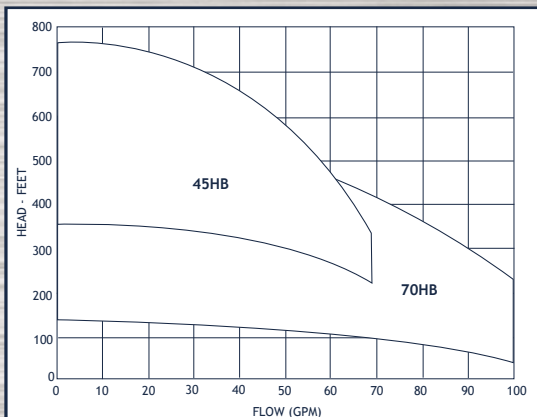


GOULDS WATER TECHNOLOGY



HB Series

UP TO 800 GPM, 920' TDH

- Temperatures to 150° F
- Steel casings, cast iron bowls
- Bronze impellers and bearings
- Carbon/silicon carbide/Buna mechanical seals
- 416SS pump shaft
- Vertical configurations
- Motor options in three phase, ODP or TEFC enclosures

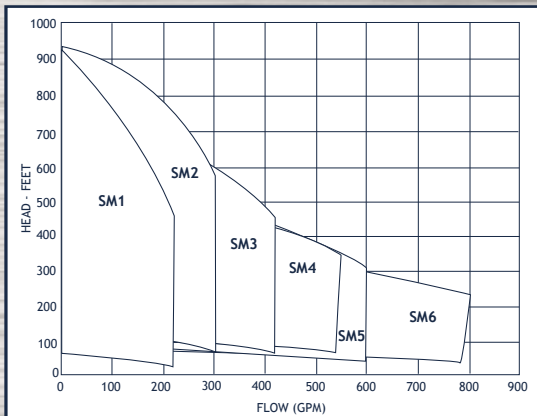


GOULDS WATER TECHNOLOGY



SMVT Series

UP TO 1500 GPM, 1640' TDH

- Temperatures to 280° F
- Cast iron, bronze fitted, stainless steel fitted, or all stainless steel construction
- Flanged suction and discharge ports
- Carbon/silicon carbide or silicon carbide/silicon carbide mechanical seals, Viton® or EPDM elastomers
- Vertical configurations
- Motor options in three phase, ODP or TEFC enclosures

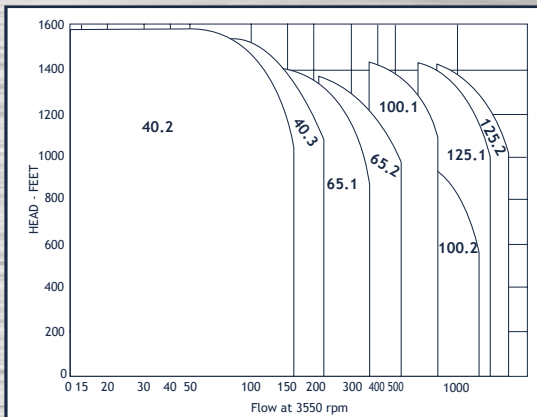

GOULDS WATER TECHNOLOGY



MPVN Turbine Series