


# HYDRAULICALLY BALANCED DIAPHRAGM

## HYDRA-CELL




F20 and M03 Series

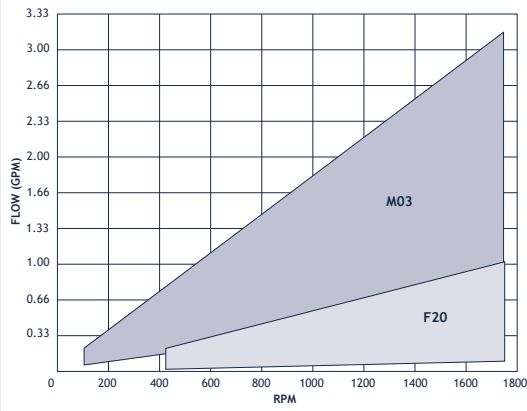


### UP TO 3.2 GPM, 1500 PSI

- Brass, 316SS, **Hastelloy® C** metallic heads; Polypropylene and Kynar non-metallic heads
- Buna-XS, Viton®-XT, Neoprene, EPDM or Teflon® diaphragm options
- Dry lifts to 5 ft; run-dry capable
- Thin, thick, corrosive or mildly abrasive liquids can be handled
- C-Face or bare shaft mounted
- .03 size available in convenient mono-block style

## HYDRA-CELL

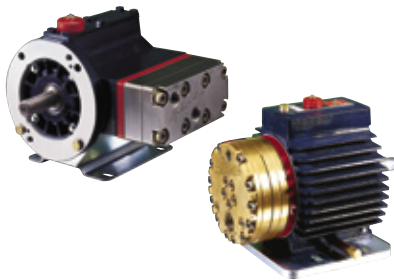


D04 and D15 Series

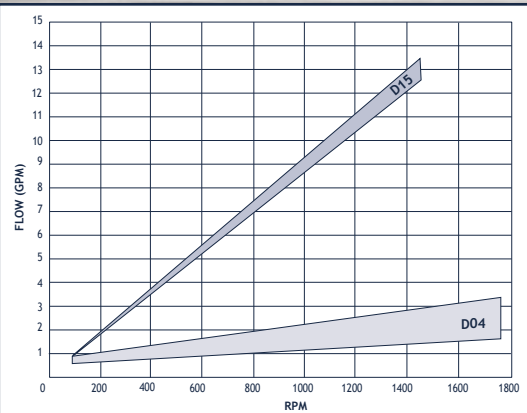


### UP TO 15 GPM, 2500 PSI

- Brass or stainless steel pump heads
- Buna-XS or Viton®-XT diaphragm elastomer options
- Dry lifts to 8'; run-dry capable
- Thin, thick, corrosive or mildly abrasive liquids can be handled
- C-Face or bare shaft mounted
- Smooth, low pulse fluid delivery
- High pressure performance

## HYDRA-CELL

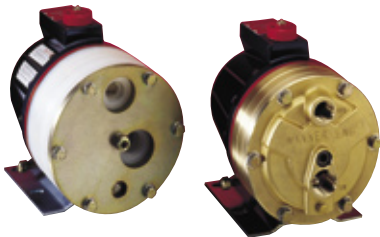


D10 Series

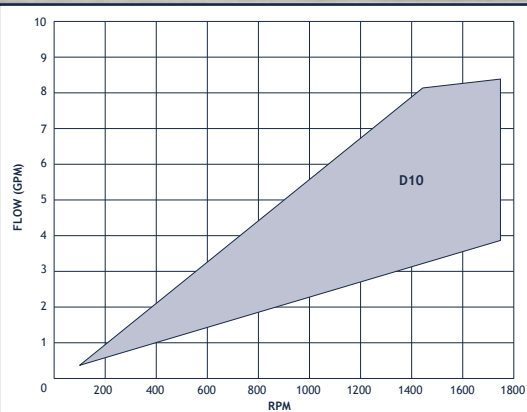


### UP TO 8.5 GPM, 1000 PSI Handles Slurries to 300 PSI

- Brass, nickel-plated cast iron, 316SS, **Hastelloy® C** metallic heads; Polypropylene and Kynar non-metallic heads
- Buna-XS, Viton®-XT, Neoprene, EPDM or Teflon® diaphragm options
- Dry lifts to 7'; run-dry capable
- Thin, thick, corrosive or mildly abrasive liquids can be handled
- Slurry-duty version available
- C-Face or bare shaft mounted
- Smooth, low pulse fluid delivery

## HYDRA-CELL

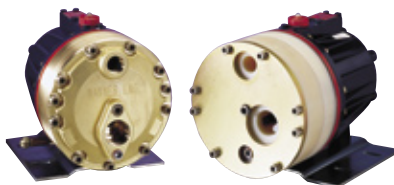

H25 and D35 Series

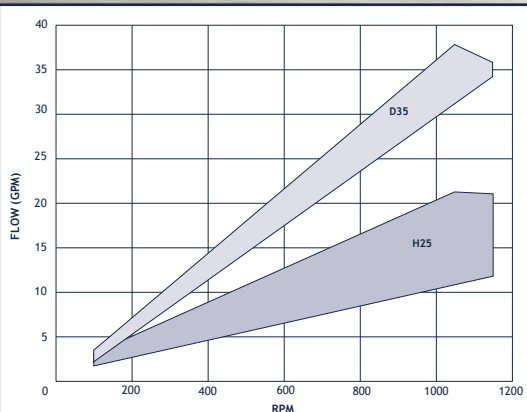

### UP TO 37 GPM, 1200 PSI Handles Slurries to 300 PSI

- Brass, nickel-plated cast iron, 316SS, **Hastelloy® C** metallic heads; Polypropylene and Kynar non-metallic heads
- Buna-XS, Viton®-XT, Neoprene, EPDM or Teflon® diaphragm options
- Dry lifts to 7'; run-dry capable
- Thin, thick, corrosive or mildly abrasive liquids can be handled
- Slurry-duty version available
- Smooth, low pulse fluid delivery