



# PISTON AND PLUNGER

CAT

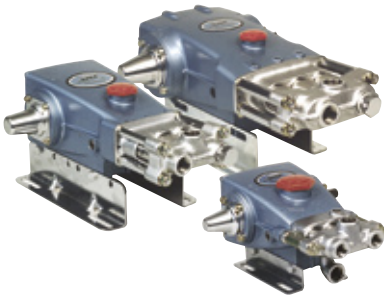

Triplex Piston Pumps

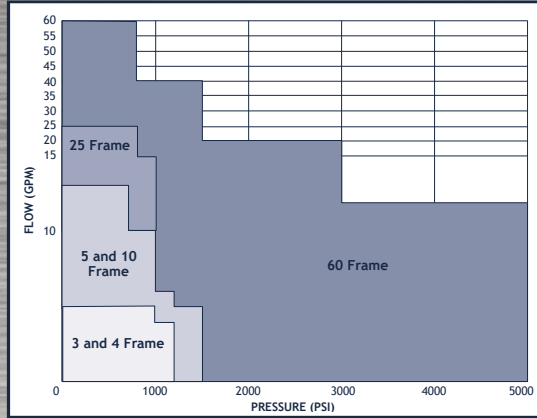


## UP TO 60 GPM, 5000 PSI

- Brass or 304SS pump heads
- Buna or Viton® elastomers
- Temperatures to 160°F
- Limited self-priming capability
- For thin, clean liquids
- Multiple drive options including belt, engine, electric, hydraulic and pneumatic

CAT




Mid-Size Industrial Plunger Pumps

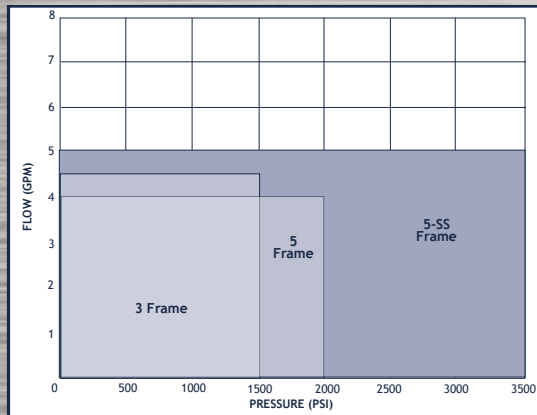


## UP TO 5 GPM, 3500 PSI

- Chrome-plated, brass, nickel, aluminum bronze, or stainless steel pump heads
- Buna or Viton® elastomers
- Solid ceramic plungers
- Temperatures to 160°F
- Multiple drive options including electric motor, gas or diesel engine, hydraulic, clutch and more
- For clean, thin liquids

CAT

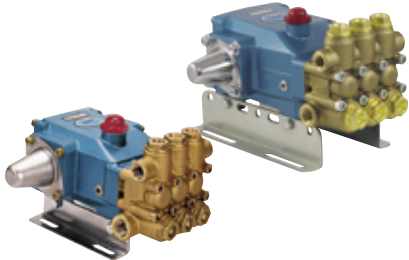


High Pressure Mid-Size Industrial Plunger Pumps

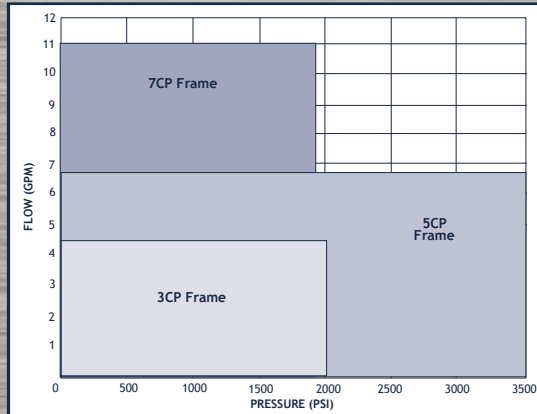


## UP TO 11 GPM, 3500 PSI

- Chrome-plated, brass, nickel, aluminum bronze, or stainless steel pump heads
- Buna or Viton® elastomers
- Solid ceramic plungers
- Temperatures to 160°F
- Multiple drive options including electric motor, gas or diesel engine, hydraulic, clutch and more
- For clean, thin liquids

CAT

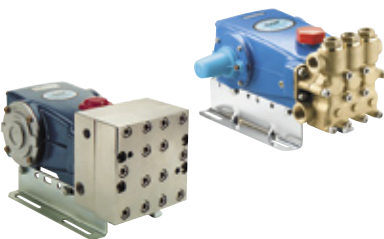

High Pressure Intermediate Size Industrial Pumps

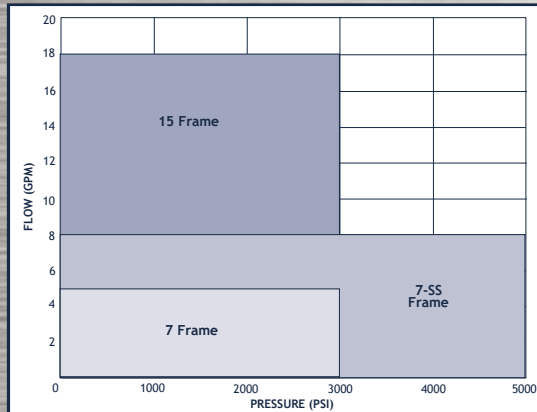

## UP TO 18 GPM, 5000 PSI

- Chrome-plated, brass, nickel, aluminum bronze, or stainless steel pump heads
- Buna or Viton® elastomers
- Solid ceramic plungers
- Temperatures to 160°F
- Multiple drive options including electric motor, gas or diesel engine, hydraulic, clutch and more
- For clean, thin liquids