


# FINISH THOMPSON DRUM PUMPS

## PURE CONSTRUCTION FOR TOUGH APPLICATIONS

The TBP pump tubes are constructed of pure polypro/PVDF materials for use with bleach, nitric acids, hydrochloric acids, sulfuric acids, etc. The TBS series is 316SS and suitable for a variety of mild corrosives and solvents.

- Up to 20 GPM, 40' TDH
- Temperatures to 150°F
- Up to 1.4 specific gravity
- TBP series not for use in explosive environments

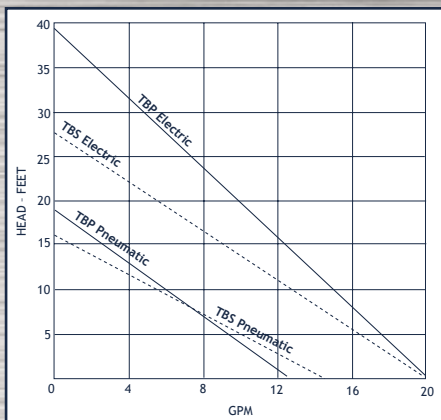

## FINISH THOMPSON




TBP Series

## MEDIUM VISCOSITY HANDLING IN POLY, PVDF AND 316SS

These sealless pumps handle acids, caustics, chemicals and flammables of up to 1.8 specific gravity and 2000 centipoise.

- Up to 42 GPM
- Up to 80' TDH
- Temperatures to 160°F (Polypropylene)
- Temperatures to 220°F (316 Stainless)
- Temperatures to 120°F (316 PVDF)
- Unique double suction design
- 27", 40", 48", 60" and 72" lengths available

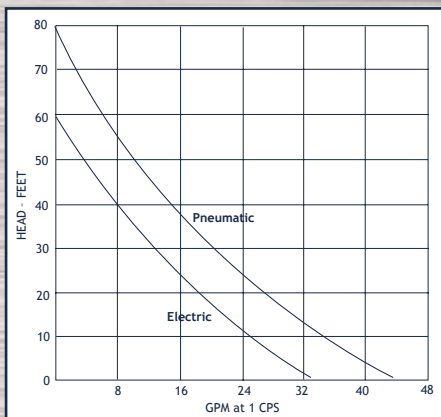

## FINISH THOMPSON




PF Sealless Series

## MEDIUM VISCOSITY HANDLING IN CPVC AND 316SS

These sealed pumps handle mild corrosives, solvents, flammables and sanitary (see page 95) liquids of up to 1.8 specific gravity. Designed for semi-viscous liquids, inks, detergents, vinegar and motor oils.

- Up to 16 GPM (air), 10 GPM (electric)
- Up to 30' TDH
- Up to 2,000 centipoise with air motor
- Up to 400 centipoise with electric motor
- Temperatures to 150°F

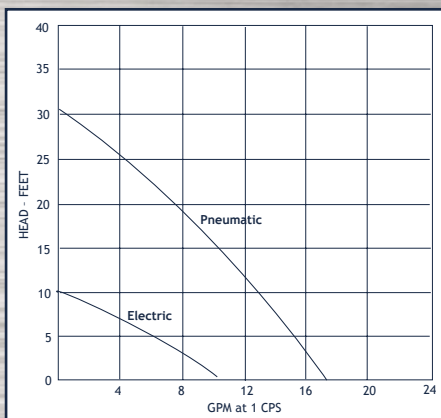

## FINISH THOMPSON




TT Sealed Series

## HIGH VISCOSITY HANDLING IN 316SS

These sealed pumps are rated for mild corrosives and flammables of high viscosity in applications which require high head. Designed for high viscosity polymers, adhesives, oils, grease, resins and flammable liquids.

- Up to 10 GPM
- Up to 300' TDH
- Up to 100,000 centipoise
- Up to 1.8 specific gravity
- Temperatures to 200°F (BT) 180°F (HVDP)

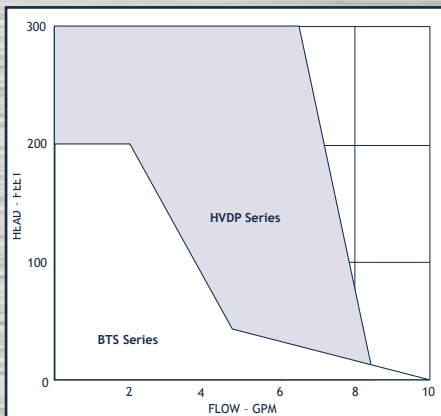

## FINISH THOMPSON



BTS and HVDP (PC) Series