


# SELF-PRIMING CENTRIFUGALS

## UP TO 160 GPM, 95' TDH

- Temperatures to 300° F
- Self-priming to 25 ft.
- Will pass solids up to  $\frac{9}{16}$ "
- Viton® mechanical seal standard, EPDM or Teflon® available, double seal options
- Construction: cast iron, bronze or aluminum wet ends
- Flomax 8 available in 316SS
- Drive Options: electric close-coupled, pedestal mount, hydraulic, electric or manual clutch, and gas/diesel engine drive

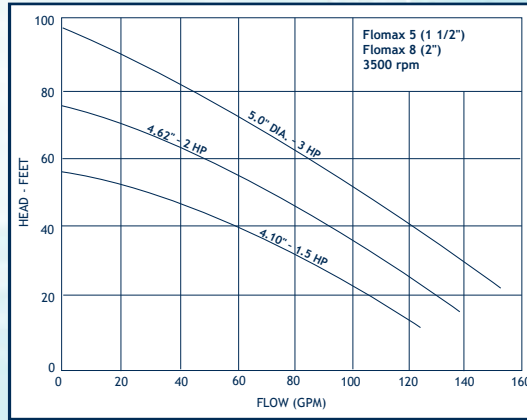


## MP FLOMAX 5-8



1 1/2" or 2" Cast Iron, Brz. or Alum.

## UP TO 300 GPM, 130' TDH

- Temperatures to 300° F
- Self-priming to 25 ft.
- Will pass solids up to  $\frac{5}{8}$ "
- Viton® mechanical seal standard, EPDM or Teflon® available
- Construction: cast iron, bronze or aluminum wet ends
- Drive Options: electric close-coupled, pedestal mount, hydraulic, electric or manual clutch, and gas/diesel engine drive

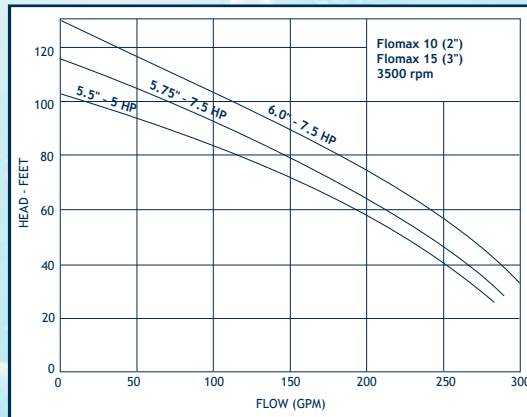


## MP FLOMAX 10-15



2" or 3" Cast Iron or Bronze

## UP TO 520 GPM, 170' TDH

- Temperatures to 300° F
- Self-priming to 25 ft.
- Will pass solids up to  $\frac{5}{8}$ "
- Viton® mechanical seal standard, EPDM or Teflon® available
- Construction: cast iron or bronze
- Fully open impeller
- Drive Options: electric close coupled, pedestal mount, and gas/diesel engine drive

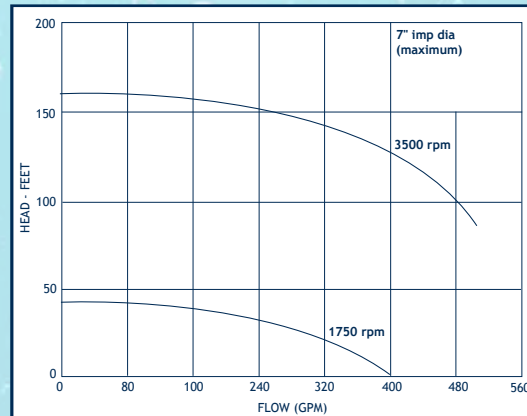


## MP FLOMAX 30



3" and 4" Cast Iron or Bronze

## UP TO 720 GPM, 225' TDH

- Temperatures to 300°
- Self-priming to 25 ft.
- Will pass solids up to  $\frac{5}{8}$ "
- Viton® mechanical seal standard, EPDM or Teflon® available
- Construction: cast iron
- Semi-open dynamically balanced Impeller
- Drive options: electric close coupled, pedestal mount, and gas/diesel engine drive

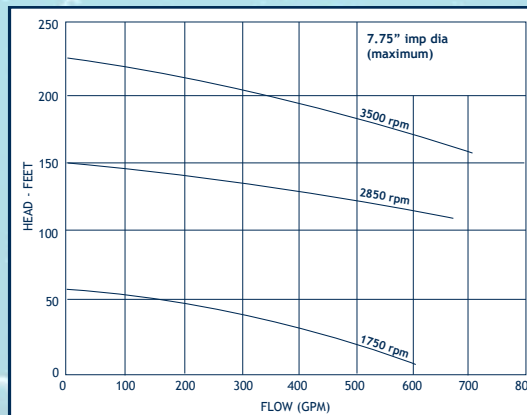

## MP FLOMAX 40



4" Cast Iron