


# MAGNETIC DRIVE FLOODED SUCTION

## UP TO 18' GPM, 29' TDH

- Used for marine air conditioning, marine refrigeration and ice makers
- 1" FPT x 1/2" MPT ports
- Materials in contact with liquid: Polypro, ceramic, Buna or Viton®
- Common models  
AC-5C-MD: 115 or 230 vac, open motor  
TE-5C-MD: 115 or 230 vac, TEFC motor
- See page 154 for service parts

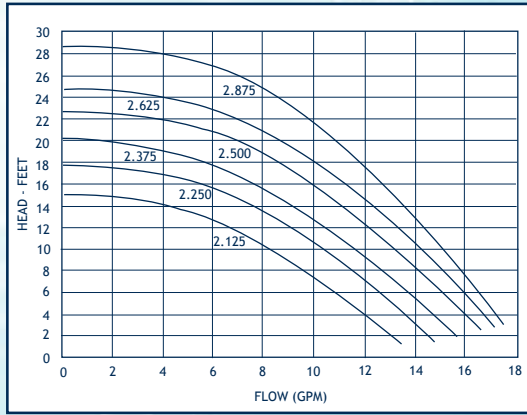


## MARCH



5C-MD Series

## UP TO 30 GPM, 41' TDH

- Used for marine air conditioning, marine refrigeration and ice makers
- 1" FPT x 3/4" MPT ports
- Construction: Polypro, Kynar or 316SS
- Materials in contact with solution: housing material, ceramic and Viton® (5.5S has carbon bushing)
- Common models  
TE-5.5C-MD: 115, 230 or 460 vac, TEFC motor  
TE-5.5C-MD/AC: 115 vac ODP motor

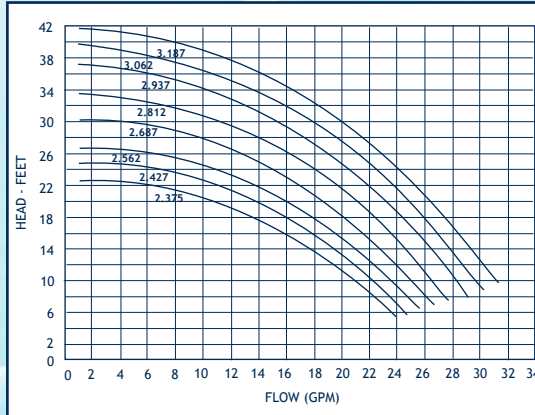


## MARCH



TE-5.5 Series

## UP TO 34 GPM, 49' TDH

- Used for marine air conditioning, marine refrigeration and ice makers
- 1" FPT x 3/4" MPT ports
- Materials in contact with liquid: GF Polypro, Ryton, ceramic, Viton® Teflon®/Ryton bushing
- Common models  
DP-6T-MD: 115, 230 or 460 vac, open motor  
TE-6T-MD: 115, 230 or 460 vac, TEFC motor

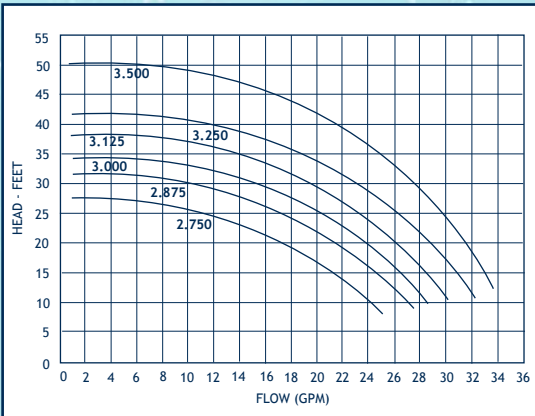


## MARCH



TE-6 Series

## UP TO 50 GPM, 60' TDH

- Used for marine air conditioning, marine refrigeration and ice makers
- 1 1/2" FPT x 1" MPT Ports
- Construction: GF Polypro, Kynar, Hastelloy C or 316SS
- Materials in contact with liquid: Polypro, ceramic, Viton® and Teflon®/Ryton bushing
- Common models  
TE-7R-MD: 115, 230 or 460 vac, TEFC motor
- Also available in self-priming

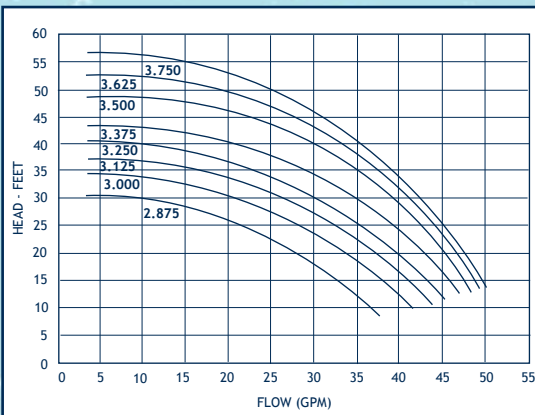

## MARCH



TE-7 Series