


# CAST IRON GEAR PUMPS

## UP TO 5 GPM, 150 PSI

- Temperatures to 650° F
- Lubricating or non-lubricating liquids
- High viscosities handled at direct drive motor speeds
- Ductile iron body, several rotor and bushing material choices
- Lip seal, mech. seal or packing
- Close coupled or foot mounting options
- Available with reversing switch

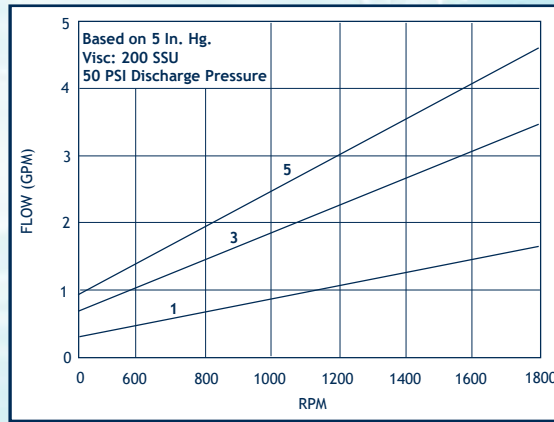


## HAIGHT




U Series - (Hub Mount Shown)

## UP TO 8 GPM, 150 PSI

- Temperatures to 650° F
- Lubricating or non-lubricating liquids
- High viscosities handled at direct drive motor speeds
- Ductile iron body, several rotor and bushing material choices
- Lip seal, mech. seal or packing
- Close coupled or foot mounting options
- Available with reversing switch

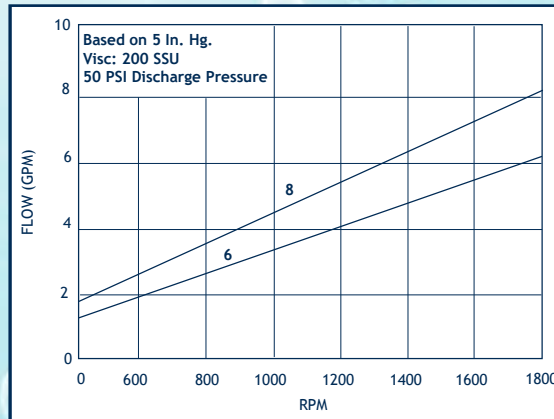


## HAIGHT

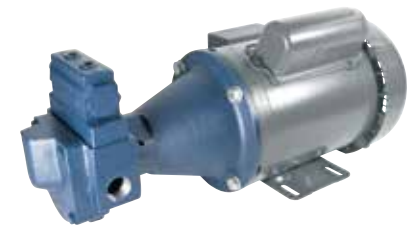

U Series - (C-Face Mount Shown)

## UP TO 40 GPM, 150 PSI

- Temperatures to 650° F
- Lubricating or non-lub. liquids
- High viscosities handled at direct drive motor speeds
- 316SS available on some models
- Ductile iron body, several rotor and bushing material choices
- Lip seal, mech. seal or packing
- Close coupled or foot mounting options
- Available with reversing switch

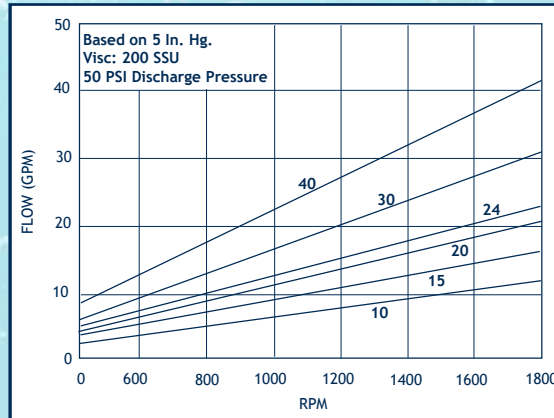


## HAIGHT



U Series - Square Flange

## UP TO 76 GPM, 300 PSI

- Cast iron case, ductile iron option
- Hardened iron gears and steel shafts
- Bronze, iron or carbon bearings
- Bi-rotational
- Operates at synchronous electric motor speeds
- Packing or mechanical seal

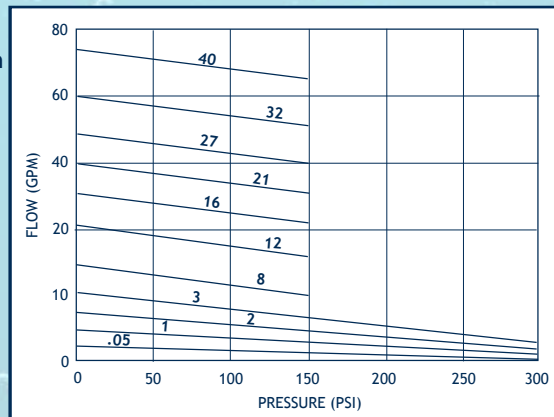

## ROPER



A Series