




UP TO 1200 GPM, 310 TDH, MEETS 3A STANDARDS WITH 32RA (150 GRIT) POLISH

The "C" series pumps are designed specifically for sanitary applications in the dairy, food, beverage, cosmetics, pharmaceutical and industrial industries. Casing, backplate and impeller are 316L stainless steel (except C100 series which is 304 stainless) with polished sanitary finish of 32RA (150 grit). Heavy-duty cast clamp and groove-in-impeller/shaft design are included for CIP (clean-in-place) operation.

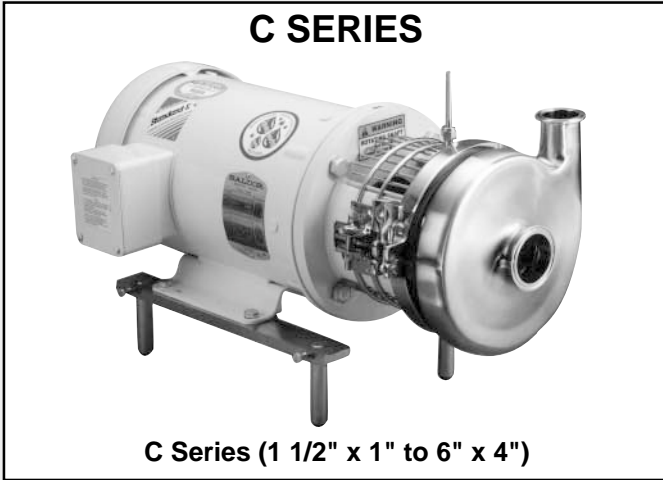

- **Economical Cost**
- **316L Construction**
- **CIP Clamp Ports Standard**
Optional NPT or Flanged Ports
- **Seal Options**
Externally balanced, externally balanced with replaceable stationary seat, water cooled balanced double seal and water cascade
- **Drive Options**
single and three phase, ODP, TEFC, explosion proof, and wash down duty, 60 and 50 hz, and custom configurations
- **Interchangeable Parts with all C-Series Brands**

Pump Series	Max Flow	Max Head	HP Range	Inlet	Outlet
C100	75 GPM	55 Feet	1/4 to 1 1/2	1 1/2"	1"
C114	275 GPM	70 Feet	1/4 to 3	1 1/2" or 2"	1 1/2"
C216	280 GPM	165 Feet	1/2 to 15	2" or 2 1/2"	1 1/2"
C218	500 GPM	310 Feet	1 to 30	2" or 3"	1 1/2"
C328	750 GPM	300 Feet	1 1/2 to 60	3" or 4"	2"
C4410	1200 GPM	275 Feet	5 to 60	4" or 6"	4"

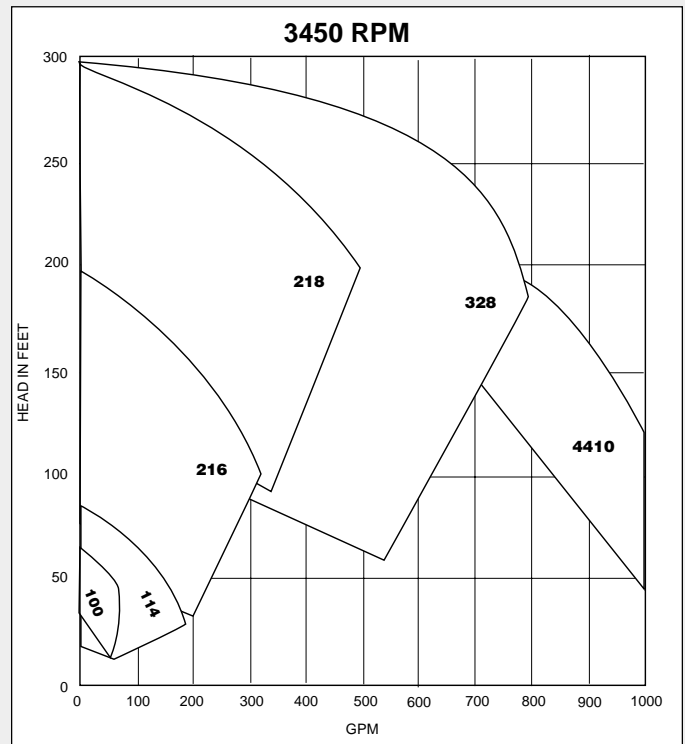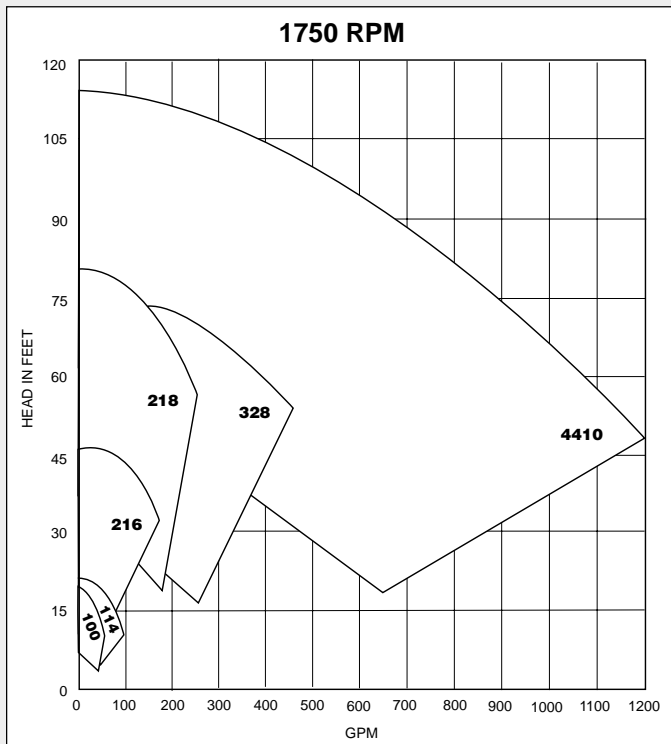

FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656