


316SS & HASTELLOY GEAR

UP TO 2 GPM, 100 PSI (150 PSI Intermittent)

- Temperatures to 400° F
- Housing Options: 316 Stainless or Hastelloy C
- Seal Options: Teflon, Viton, EPDM, or packing of Teflon or Grafoil
- Bearing Options: Carbon or Teflon
- Gear Options: Teflon, Hastelloy C, Ryton, 316 Stainless, W88

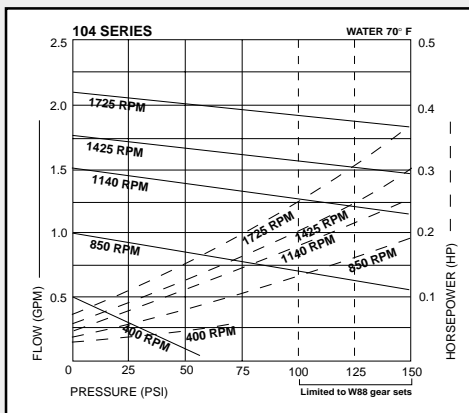


OBERDORFER




104XXX Series (3/8" Ports)

UP TO 4 GPM, 100 PSI (150 PSI Intermittent)

- Temperatures to 400° F
- Housing Options: 316 Stainless or Hastelloy C
- Seal Options: Teflon, Viton, EPDM, or packing of Teflon or Grafoil
- Bearing Options: Carbon or Teflon
- Gear Options: Teflon, Hastelloy C, Ryton, 316 Stainless, W88

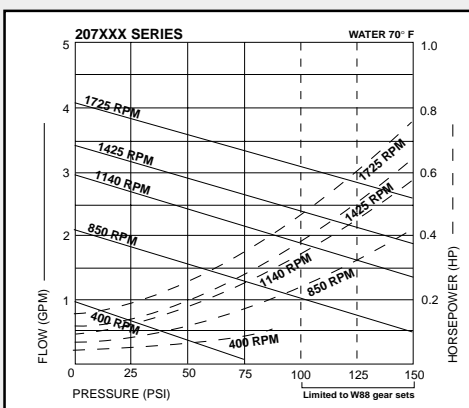


OBERDORFER

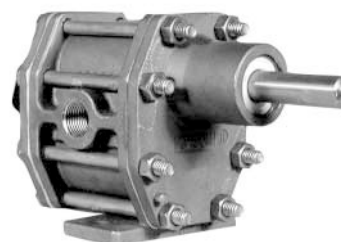

207XXX Series (3/8" Ports)

UP TO 10 GPM, 100 PSI (150 PSI Intermittent)

- Temperature to 400° F
- Housing Options: 316 Stainless or Hastelloy C
- Seal Options: Teflon, Viton, EPDM, or packing of Teflon or Grafoil
- Bearing Options: Carbon or Teflon
- Gear Options: Teflon, Hastelloy C, Ryton, 316 Stainless, W88

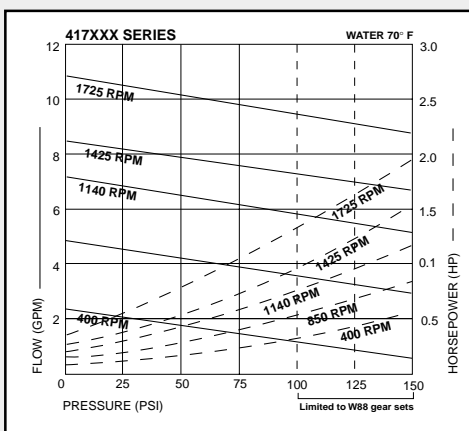


OBERDORFER



417XXX Series (3/4" Ports)

UP TO 23 GPM, 100 PSI

- Temperature to 400° F
- Housing Options: 316 Stainless or Hastelloy C
- Seal Options: Teflon, Viton, EPDM, or packing of Teflon or Grafoil
- Bearing Options: Carbon or Teflon
- Gear Options: Teflon, Hastelloy C, Ryton, 316 Stainless, W88

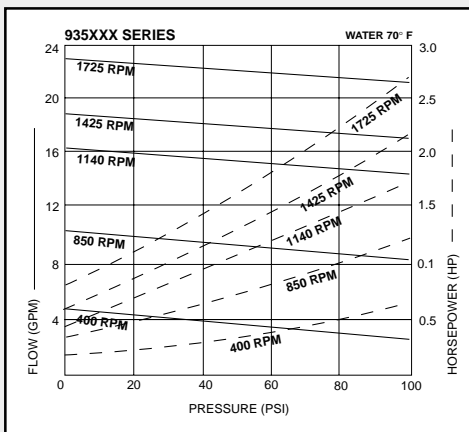

OBERDORFER



935XXX Series (1 1/4" Ports)

FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656