


## 115 VAC & 12 VDC BOTTLED WATER DISPENSER

This compact system is ideal for automatically supplying bottled water to a refrigerator ice/water dispenser and/or a water tap. It comes complete with a demand water pump, 20 feet of 1/4" discharge tube, suction tube with universal cap for a 5 gallon jug, and float switch for automatic shutoff when the bottle is empty. There are two voltages (12 vdc and 115 vac) available and an optional discharge faucet.

Model Number	Voltage	Includes Faucet	Included Accessories
FJ BW1000A	115 vac	NO	20' of 1/4" discharge tube, suction tube & cap
FJ BW1000B	115 vac	YES	20' of 1/4" discharge tube, suction tube & cap
FJ BW3000A	12 vdc	NO	20' of 1/4" discharge tube, suction tube & cap
FJ BW3000B	12 vdc	YES	20' of 1/4" discharge tube, suction tube & cap

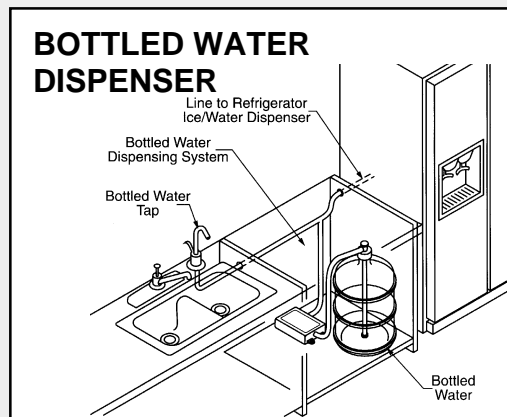

## PITCHER PUMP FOR DOCK, CABIN OR DISPLAY

This cast iron hand operated pump draws on the dependable and historic piston design. Visions of the family farm or the old west are sure to come to mind when this pump is in view. These pumps are often used on freshwater dock fish cleaning stations, back porches of remote hunting or getaway cabins, and ornamental gardens at home.

Model Number	Max. Suction Draw (Lift)	Suction Port	Dimensions in inches (H x W x D)
DP 110	25 feet	1 1/4" FPT	16" x 7.25" x 9"



## AUTOMATIC SUMP-LESS PUMP FOR UNDER SINK!

This compact automatic pump comes complete with sump reservoir and float switch. No additional sump or open pit is required. Simply connect it directly below the laundry tray, sink or liquid source. Pump is constructed of aluminum with brass clog proof impeller. Port sizes are as follows: 1 1/2" FPT inlet, 1" FPT outlet and 1/2" FPT vent. Dimensions are 16 1/2" long, 7 1/2" wide and 10" high.

Pump Model	Volts AC	Cord Length	GPH at Feet of Head				
			7'	9'	11'	13'	15'
Lancaster #399	115	8'	2150'	2000'	1700'	1300'	1000'



## AUTO. COLUMN SUMP PUMPS IN STAINLESS STEEL

AMT stainless steel industrial/commercial sump pumps are available with ODP or TEFC, 1/3, 1/2 or 3/4 HP and column heights of 29 or 41 inches. All models include a stainless steel shaft, screen and float, an automatic switch, 1 1/2" FPT discharge port, and a 115 vac motor with 10 feet of line cord. Handles temperatures to 200° F.

Pump Series	5'	GPH at Feet of Head					Shut Off
		10'	15'	20'	25'		
AMT 523X-98 - 1/3 HP	3250	3000	2250	-	-	20'	
AMT 523X-98 - 1/2 HP	3800	3700	3250	2500	-	25'	
AMT 523X-98 - 3/4 HP	4900	4700	4500	3800	2700	30'	

