


**HELIARC WELDER COOLANT GEAR PUMPS FOR MILLER, HOBART & LINCOLN (FOOT/COUPLING MOUNT)**

These Oberdorfer bronze internal gear pumps have a relief valve and by-pass line port. They mount by a two bolt foot or via the coupling on the welder's drive shaft.


PUMP#	REPLACEMENT#	MOUNT	MAX GPM	REPAIR KIT
0001146	N1000R-39	SHAFT	1.5	11187
0001147	N1000R-39	SHAFT	1.5	11187
1000R-39	N1000R-39	SHAFT	1.5	11187
1000R-53	N1000R-66	FOOT	2.1	11266
1000R-66	N1000R-66	FOOT	2.1	11925

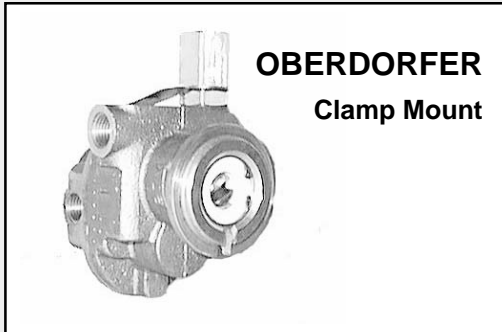

**HELIARC WELDER COOLANT GEAR PUMPS FOR MILLER, HOBART & LINCOLN (CLAMP MOUNT)**

These clamp mount Oberdorfer bronze internal gear pumps have a relief valve and by-pass line port. They mount via a clamp and coupling insert. (Same mounting dimensions at the Procon pump series).

MODEL NUMBER	MOUNT	MAX GPM	REPAIR KIT
N95060GE	SHAFT	1.5	11936
N95060GFCO-1	CLAMP	1.5	11936
N95060GECO-3	CLAMP	1.5	11937

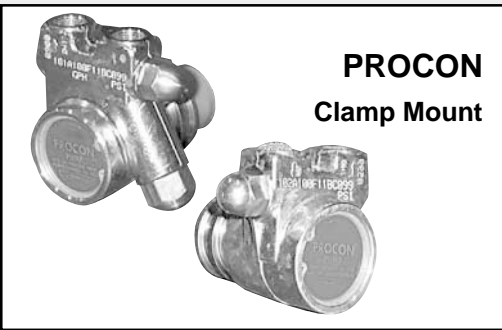

**HELIARC WELDER COOLANT VANE PUMPS FOR MILLER, HOBART & LINCOLN (CLAMP MOUNT)**

These Procon vane pumps come with an internal by-pass. Models are available with or without a strainer.

MODEL NUMBER	STRAINER	MOUNT	MAX GPM
C01304H	YES	CLAMP	1.6
C01504H	NO	CLAMP	1.6



**PARTS WASHER PUMP FOR MINERAL SPIRITS, DEODORIZED KEROSENE & STODDARD SOLVENT**

This submersible parts washer pump is approved for mineral spirits, deodorized kerosene and stoddard solvent. It is supplied with double Viton seals, nylon head and aluminum housing. It will handle unheated liquids to 100° F with a flash point of 140° F or greater. Discharge port is 1/4" MPT and will accept a 1/4" ID hose.

MODEL NUMBER	VOLTS AC	GPH @ FEET OF HEAD				MAX HEAD
		1'	3'	5'	7'	
LG 1-YS	115	205	188	120	35	7.4'



**ECONOMICAL DRUM PUMP IN POLYPRO FOR STORAGE TANKS & DRUMS**

The Fill-Rite hand level piston pump is the economical way to transfer engine oils, gear oils, anti-freeze, mild acids, and even paraffin at approximately 11 ounces per stroke. Each pump is constructed of polypropylene with Nitrile seals, telescoping suction pipe, and locking ring for 360 alignment versatility.

MODEL NUMBER	FLOW PER STROKE	MATERIALS OF CONSTRUCTION
FR 20	11 ounces	Polypropylene with Nitrile seals

**QUICK TIP: DO YOU SEE YOUR PUMP? IF NOT, CALL US FOR HELP.**