


1/4" TO 1 1/4", UP TO 90 GPM, UP TO 65 TDH, IN 42 FRAME AND 56J FRAME MOUNTING

The Price LT25 series utilizes the compact 42 frame design providing continuous duty in tight spaces. The Price "F" series and AMT 3XXX series provide economical continuous duty operation in cast iron, bronze and stainless steel construction.


UP TO 12 GPM, 48 TDH

- Temperatures to 300° F
- Semi-open impeller
- Housing Construction: 316SS or Bronze
- Multiple Seal Options: Buna, Neoprene, Viton, EPR, Teflon, single and double mechanical, Silicon and Tungsten Carbide faces, seal flush or quench
- Drive Options: single and three phase, ODP, TEFC, explosion proof and custom configurations

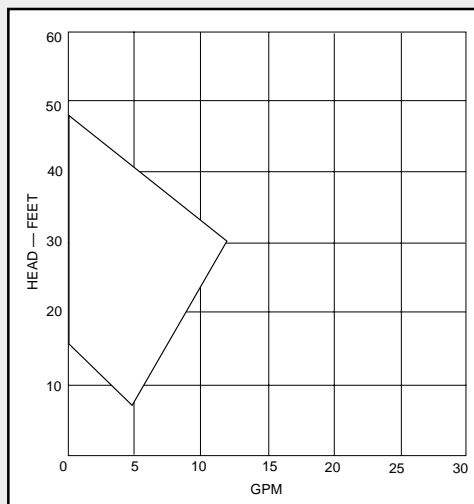

UP TO 25 GPM, 54 TDH

- Temperatures to 200° F
- Semi-open impeller
- Housing Construction: Cast Iron or Bronze
- Multiple Seal Options: Buna, Neoprene, Viton, EPR and Teflon
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations

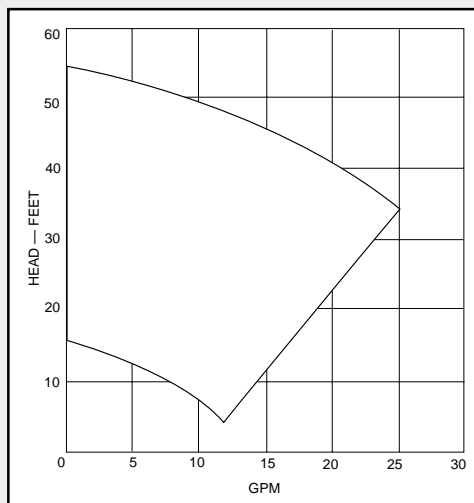

UP TO 90 GPM, 65 TDH

- Temperatures to 200° F
- Semi-open impeller
- Housing Construction: 316SS, Cast Iron or Bronze
- Buna or Viton mechanical seal
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations
- 368x Series = Curves A & B
- 370x Series = Curves C, D & E
- 369x Series = Curves F, G & H

