


**PRIMO
(Bronze)**



3/4" ports, 1/8 hp

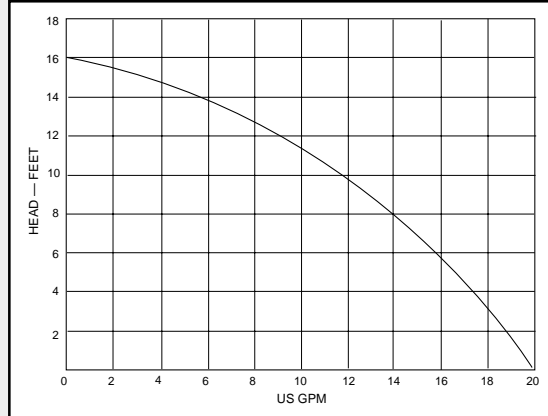

UP TO 20 GPM, 16 TDH

- Temperatures to 180° F
- Semi-open impeller
- Self-priming to 3 ft.
- Construction: Bronze
- Seal Options: Buna mechanical or lip seal
- Compact continuous duty, 1/8 HP, 115 vac, TEFC motor, 12 vdc version available

**OBERDORFER
(Bronze & Aluminum)**



1" ports, 300 series

CAPACITY - Water 60° F - Gallons Per Minute					
DISCHARGE PRESSURE		3450 RPM SUCTION LIFT			
FEET	Equivalent P.S.I.	0 FT.	5 FT.	10 FT.	15 FT. 20 FT.
0	0	22	20	17	14 10
5	2.2	20	17	14	10 5
10	4.3	17	14	10	5
15	6.5	14	10	5	
20	8.7	10	5		
25	10.8	5			
30	13.0	3			
35	15.2	1			


UP TO 22 GPM, 35 TDH

- Temperatures to 300° F
- Semi-open impeller
- Self-priming to 20 ft.
- Construction: Bronze
- Elastomer Options: Buna, Viton and Teflon
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations

**AMT
(Stainless)**



1" ports, 4294 series

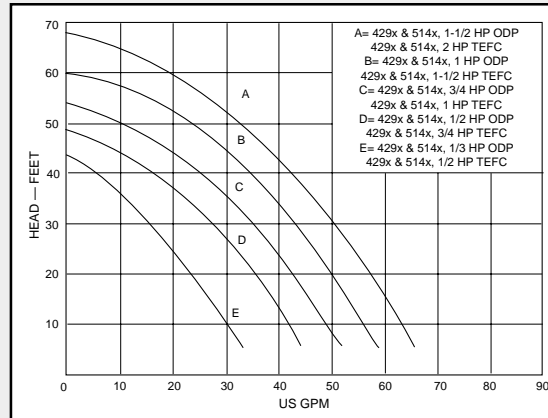


UP TO 66 GPM, 68 TDH

- Temperatures to 200° F
- Semi-open impeller
- Self-priming to 6 ft.
- Construction: 316 SS
- Seal Options: Viton mechanical seal (other materials available)
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof, and custom configurations

**AMT
(Stainless & Bronze)**



1 1/2" ports, 3890 series

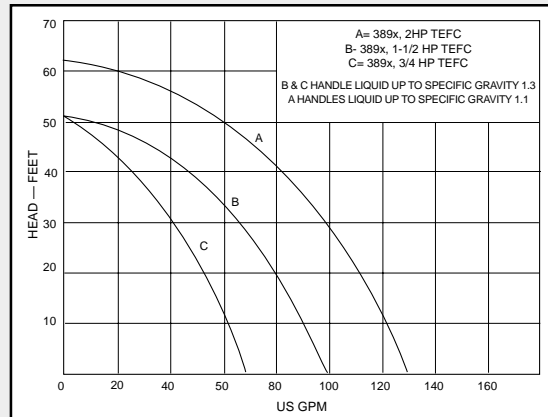

UP TO 130 GPM, 63 TDH

- Temperatures to 200° F
- Semi-open impeller
- Self-priming to 6 ft.
- Construction: Bronze or 316 SS
- Elastomer Options: Viton or Teflon
- Drive Options: pedestal mount, AC and DC voltages, single and three phase, ODP, TEFC, explosion proof and custom configurations