


# SELF-PRIMING CENTRIFUGALS

## UP TO 150 GPM, 95 TDH

- Temperatures to 250° F
- Semi-open impeller
- Self-priming to 20 ft.
- Construction: 316 Stainless Steel and Cast Iron
- Multiple Seal Options: Buna, Neoprene, Viton, EPDM, Teflon, Silicon or Tungston Carbide faces, and seal flush
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

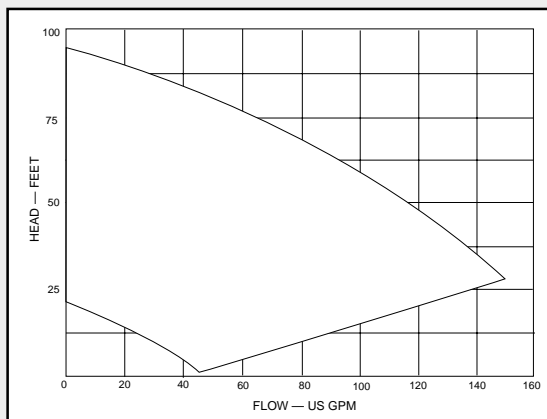

### PRICE (316 Stainless & Cast Iron)




1 1/2" ports, SP150 series

## UP TO 94 GPM, 90 TDH

- Temperatures to 300° F
- Open impeller
- Self-priming to 20 ft.
- Construction: Bronze
- Elastomer Options: Buna, Viton and Teflon
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

CAPACITY GALLONS PER MINUTE (WATER) AT VARIOUS SUCTION LIFTS						
DISCHARGE PRESSURE		3450 RPM SUCTION LIFT				
FEET	P.S.I	0 FT.	5 FT.	10 FT.	15 FT.	20 FT.
30	13.0	94	92	88	80	72
40	17.3	86	79	72	63	53
50	21.7	71	63	56	46	36
60	26.0	54	45	36	25	16
70	30.5	35	25	15	8	-
80	34.6	14	5	-	-	-

### OBERDORFER (Bronze)

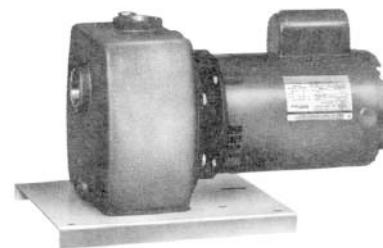

1 1/2" ports, 750 series

## UP TO 93 GPM, 134 TDH

- Temperatures to 225° F (metal impellers), 175° F (Noryl impeller)
- Enclosed impeller
- Self-priming to 25 ft.
- Construction: Cast Iron or Bronze
- Buna Seal Standard: other materials available
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

Model Number	HP	Discharge Pressure Pounds	Capacity GPM at Suction Lift & Discharge Pressure Shown		
			0' Suction	10' Suction	25' Suction
10WA6	1	20	52	48	36
		30	43	36	25
		40	23	14	-
15WA6	1 1/2	20	61	56	41
		30	58	54	40
		40	47	38	-
20WA6	2	50	24	9	-
		20	73	67	50
		30	68	64	48
30WA6	3	40	58	50	34
		50	37	23	-
		20	93	93	66
		30	85	83	64
		40	72	64	46
		50	50	35	-


### BURKS (Cast Iron & Bronze)



1 1/2" ports, WA6 Series

## UP TO 150 GPM, 100 TDH

- Temperatures to 200° F
- Semi-open impeller
- Self-priming to 20 ft.
- Construction: 316 Stainless (Cast Iron available)
- Elastomer Options: Viton, Silicon Carbide available
- Drive Options: 1/2 to 3 horsepower, single and three phase, ODP, TEFC, pedestal mount and custom configurations

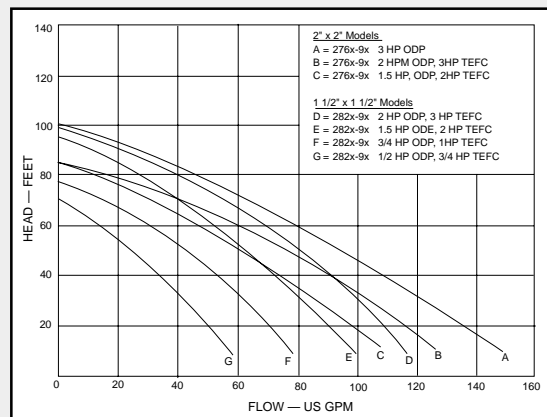

### AMT (316 Stainless)



1 1/2" & 2" ports, 282X & 276X Series