



1 1/2", 2" & 3", UP TO 300 GPM, UP TO 126 TDH, IN POLYESTER, POLYPRO AND RYTON

Pacer self priming centrifugals are lightweight, economical, and chemically resistant pumps for general service on water, salt water, agricultural chemicals, mild acids, and mild bases within a PH range of 4 to 9. Elastomer options include Buna, EPDM and Viton and are available in engine, electric, hydraulic, pneumatic and shaft drives.

PACER

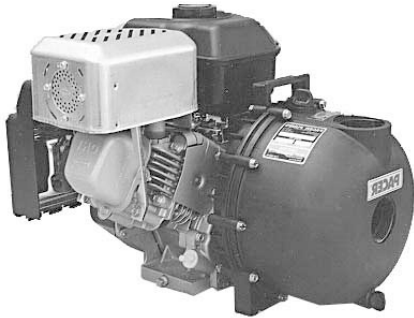

Gasoline & Diesel Engine

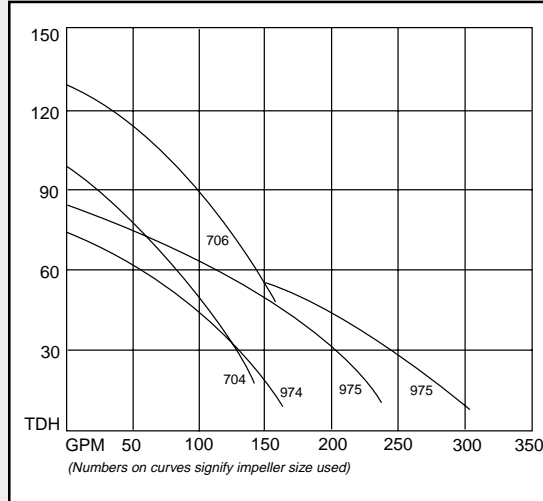


UP TO 300 GPM, 125 TDH

- Temperatures to 200° F (250° F for Ryton)
- Open impeller
- Self-priming to 25 ft.
- Construction: glass reinforced Polyester, Polypropylene and Ryton
- Elastomer Options: Buna, EPDM and Viton
- Drive Options: gasoline and diesel engines from Briggs, Honda, Yanmar and others

PACER



Electric Drive

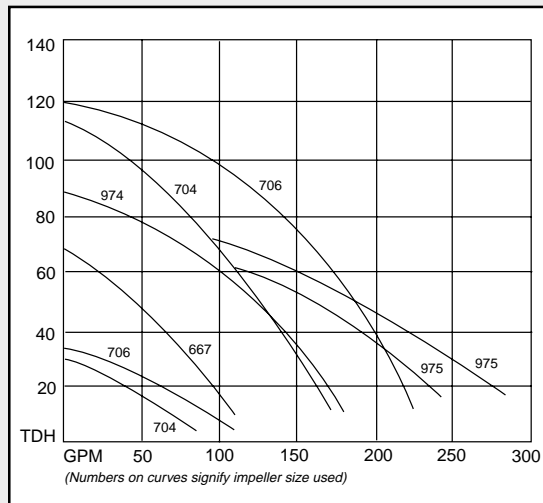


UP TO 280 GPM, 120 TDH

- Temperatures to 200° F (250° F for Ryton)
- Open impeller
- Self-priming to 25 ft.
- Construction: glass reinforced Polyester, Polypropylene and Ryton
- Elastomer Options: Buna, EPDM and Viton
- Drive Options: pedestal mount, AC or DC voltages, single or three phase, ODP, TEFC, explosion proof and custom configurations

PACER



Hydraulic, Pneumatic & Shaft Drive

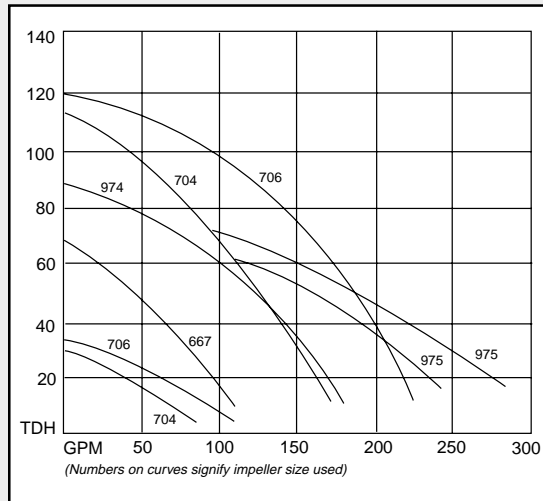

UP TO 280 GPM, 120 TDH

- Temperatures to 200° F (250° F for Ryton)
- Open impeller
- Self-priming to 25 ft.
- Construction: glass reinforced Polyester, Polypropylene and Ryton
- Elastomer Options: Buna, EPDM and Viton
- Drive Options: Hydraulic, Pneumatic, pulley, and electric or manual clutch drive

FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656