

# SELF-PRIMING CENTRIFUGALS




## 1" TO 4" SELF-PRIMING HIGH PRESSURE & SOLIDS HANDLING ENGINE DRIVEN PUMPS

Below are a few of the wide selection of AMT engine driven self-priming centrifugals. The 1", 2 cycle unit is a lightweight compact pump, which will deliver 40 PSI discharge pressure (or boost your systems output by 40 PSI). The 1 1/2" high pressure series delivers up to 100 PSI and the 2" to 4" trash pump series can handle solids up to 2" diameter.



### UP TO 58 GPM, 108 TDH

- Temperatures to 160° F
- Semi-open impeller
- Handles solids to 3/32"
- Self-priming to 20 ft.
- Construction: Cast Aluminum, Buna mechanical seal
- Compact 2 HP Tecumseh engine

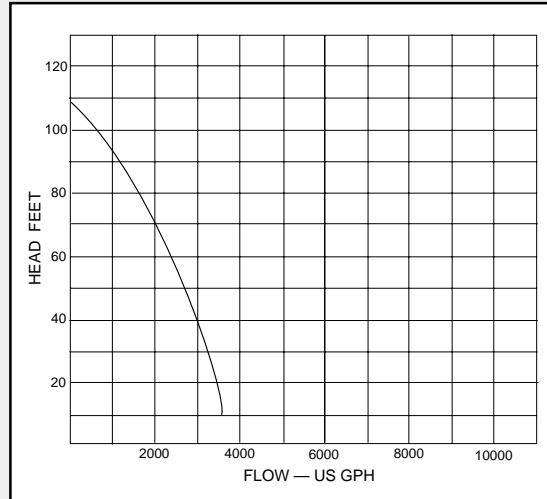



### UP TO 82 GPM, 240 TDH

- Temperatures to 160° F
- Single or double staged impeller
- Self-priming to 20 ft.
- Construction: Cast Iron or cast Aluminum
- Elastomer Options: Buna or Viton
- Engine Options: Briggs & Stratton, Honda, Kohler and Tecumseh
- Available with steel roll frame or wheeled frame with semi-pneumatic or pneumatic tires

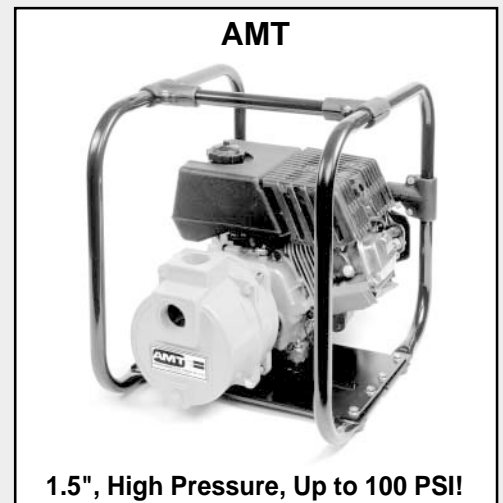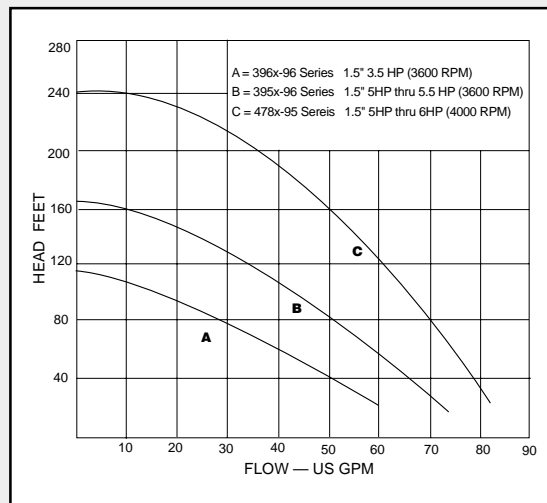

### UP TO 630 GPM, 120 TDH

- Temperatures to 160° F
- Semi-open impeller
- Self-priming to 20 ft.
- Solids Handling:  
2" ports — 1" diameter  
3" ports — 1 1/2" diameter  
4" ports — 2" diameter
- Construction: Cast Iron or cast Aluminum
- Buna Silicon Carbide mechanical seal standard
- Engine Options: Briggs & Stratton, Honda, Kohler and Tecumseh
- Available with steel roll frame or wheeled frame with semi-pneumatic or pneumatic tires (4" models come with wheel kit and base rails)

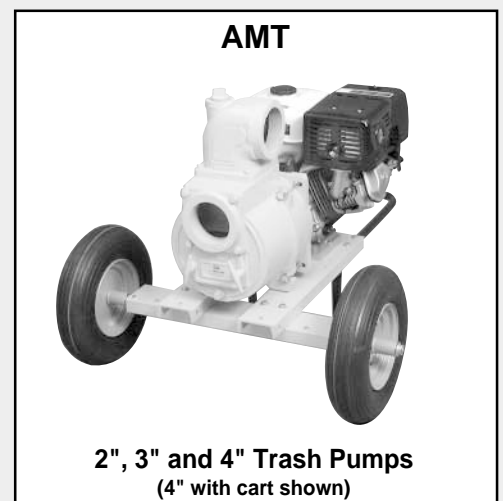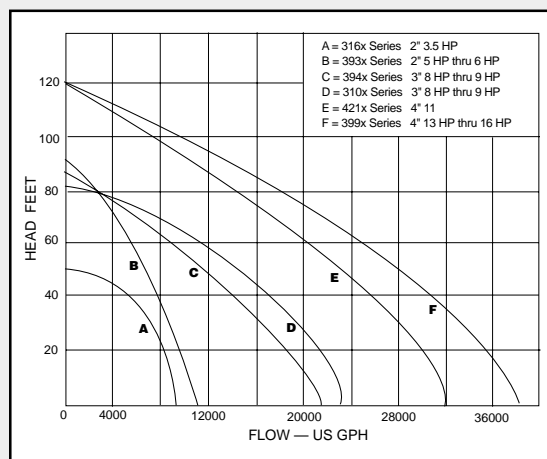

FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656