


**MARCH**




**320 Series**

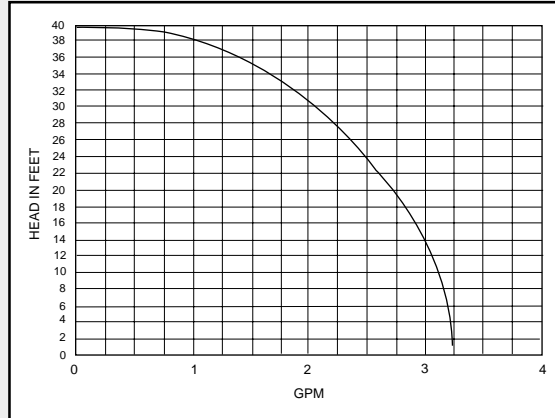


**UP TO 3.3 GPM, 40 TDH**

- Temperatures to 190° F
- Enclosed impeller
- Construction: GF Polypro
- Materials in contact with solution: GF Polypro, Ceramic & Viton
- Common models: (all open motors, and 115 or 230 vac)  
320-AP-MD: 5/8" x 1/2" Barbs  
320-CP-MD 1/2" x 3/8" MPT

**MARCH**

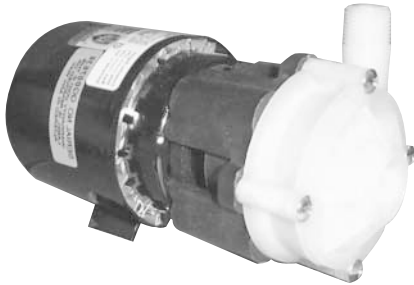


**3CP-MD Series**

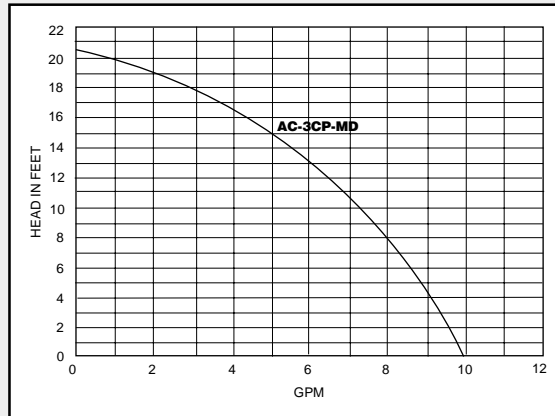


**UP TO 10 GPM, 20.5 TDH**

- Temperatures to 190° F
- Open impeller
- Construction: Polypro or Kynar
- Materials in contact with solution: AC is Polypro, Ceramic Magnet, Ceramic and Buna, BC is Polypro or Kynar, Ceramic and Viton
- Common models: (115 or 230 vac with 3/4" FPT x 1/2" MPT)  
AC-3CP-MD: Polypro, open motor  
BC-3CP-MD: Polypro, TE motor  
BC-3K-MD: Kynar, TE motor

**MARCH**




**3CP-MD Submersible Series**

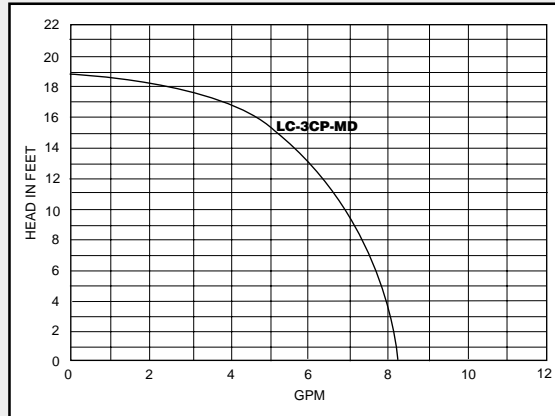


**UP TO 8.5 GPM, 19 TDH**

- Temperatures to 130° F
- Open impeller
- Construction: Polypro
- Materials in contact with solution: Polypro, Epoxy, 316SS, Buna, Ceramic; when submerged, sulfil
- Common models:  
LC-3CP-MD, 115 or 230 vac, 50 or 60 Hz, TE/Submersible motor, 3/4" FPT x 1/2" MPT

**MARCH**

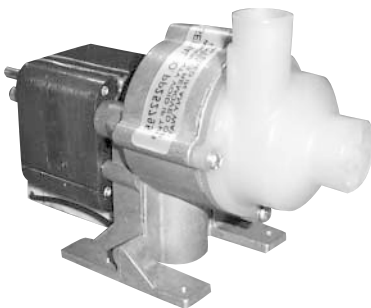

**140 Series**

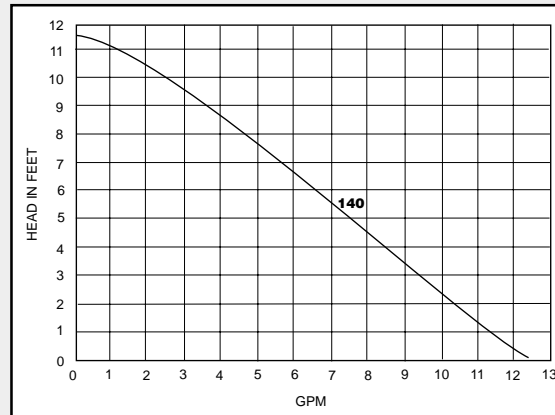

**UP TO 12.5 GPM, 11.5 TDH**

- Temperatures to 190° F
- Open impeller
- Construction: GF Polypro
- Materials in contact with solution: GF Polypro, Buna, Ceramic and Ceramic Magnet
- Common models: (open motors)  
140-1: 115 vac, 1 1/8" x 7/8" Barbs  
140-2: 230 vac, 1 1/8" x 7/8" Barbs