



MARCH

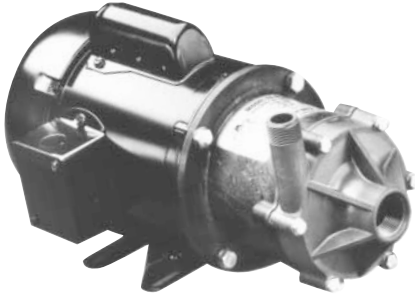

TE-6 Series

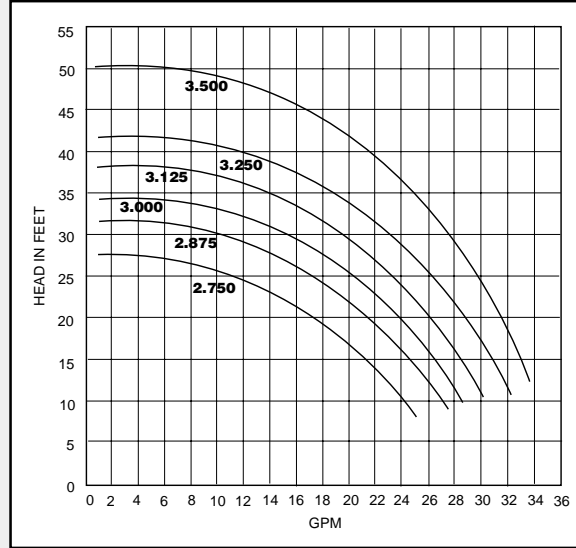


UP TO 34 GPM, 49 TDH

- Temperatures to 200° F
- Enclosed impeller
- 1" FPT x 3/4" MPT ports
- Construction: GF Polypro or Kynar
- Materials in contact with solution: 6T is GF Polypro, Ryton, Ceramic, Viton Teflon/Ryton bushing, 6K is Kynar, Ceramic, Viton Carbon bushing
- Common models: (115/230 or 230/460 vac, except DP-6T-MD is only 115/230 vac)
DP-6T-MD: Polypro, open motor
TE-6T-MD: Polypro, TEFC motor
TE-6K-MD: Kynar, TEFC motor

MARCH




TE-7 Series

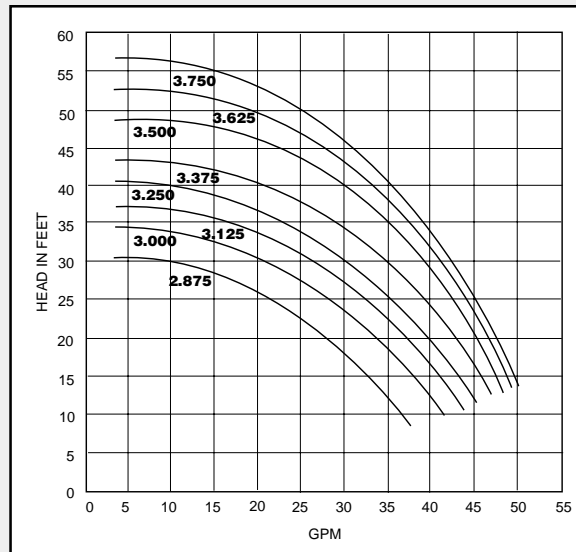


UP TO 50 GPM, 60 TDH

- Temperatures to 250° F
- Enclosed impeller
- 1 1/2" FPT x 1" MPT Ports
- Construction: GF Polypro, Kynar, Hastelloy C or 316SS
- Materials in contact with solution: housing material, Ceramic, Viton and Carbon bushing, (Polypro uses Teflon/Ryton bushing)
- Common models: (115/230 or 230/460 vac)
TE-7R-MD: GF Polypro, TEFC motor
TE-7K-MD: Kynar, TEFC motor
TE-7S-MD: 316SS, TEFC motor
TE-7H-MD: Hastelloy C, TEFC motor

MARCH

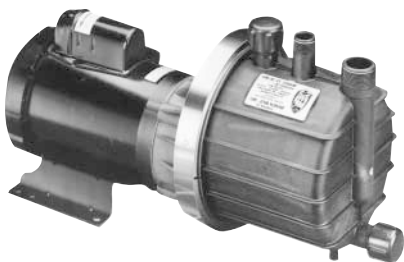

SP-TE-7 Self-priming Series

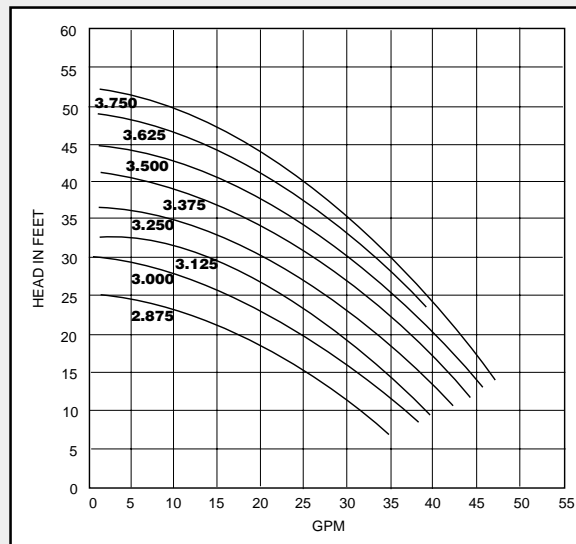

UP TO 53 GPM, 53 TDH

- Temperatures to 190° F
- Enclosed impeller
- 1 1/2" x 1" MPT ports
- Construction: GF Polypro or Kynar
- Materials in contact with solution: GF Polypro or Kynar, Ceramic, Viton, Carbon bushing
- Common models: (115/230 or 230/460 vac)
SP-TE-7P-MD: GF Polypro, TEFC motor
SP-TE-7K-MD: Kynar, TEFC motor