


MAGNETIC DRIVE CENTRIFUGALS

UP TO 82 GPM, 85 TDH

- Temperatures to 190° F
- Enclosed impeller
- 2" MPT x 1 1/2" MPT ports
- Construction: Natural PVDF
- Materials in contact with solution: natural PVDF, Ceramic, Viton and Carbon bushing
- Common model: TE-7.5-MD: Kynar, 230/460 vac TEFC motor

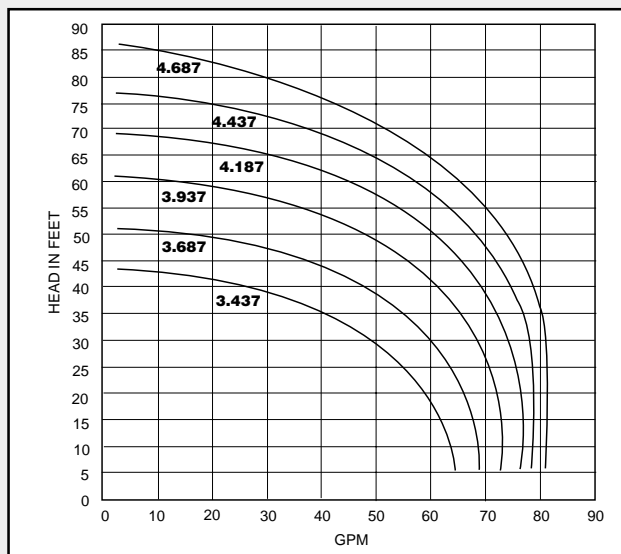


MARCH




TE-7.5 Series

UP TO 125 GPM, 95 TDH

- Temperatures to 250° F
- Enclosed impeller
- 2" MPT x 1 1/2" MPT ports
- Construction: Polypropylene, Kynar or 316SS
- Materials in contact with solution: housing materials, Ceramic, Viton and Carbon bushing (8C uses Teflon/Ryton bushing)
- Common models: (230/460 vac) TE-8C-MD: Polypro, TEFC motor TE-8C-MD: Polypro, TEFC Chemical Duty motor TE-8K-MD: Kynar, TEFC Chemical Duty motor TE-8S-MD: 316SS, TEFC Chemical Duty motor

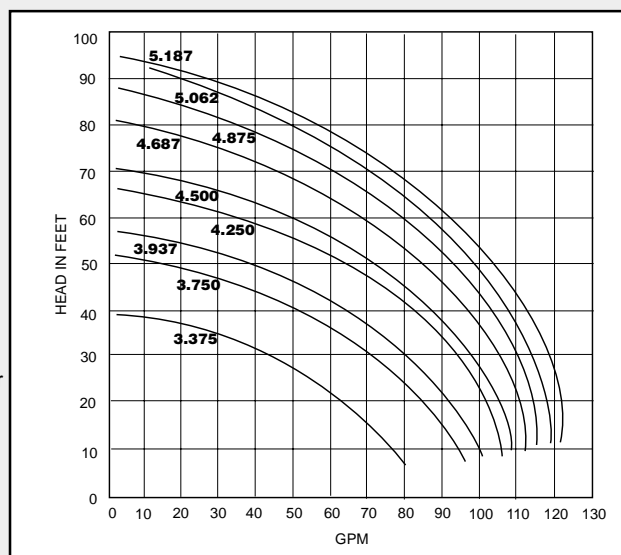


MARCH

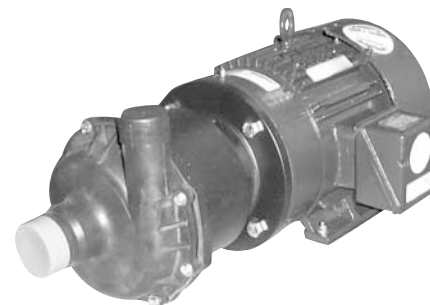


TE-8 Series

UP TO 210 GPM, 162 TDH

- Temperatures to 220° F
- Enclosed impeller
- 3" MPT x 2" MPT ports
- Construction: Kynar
- Materials in contact with solution: Kynar, Ceramic, Viton and Carbon bushing
- Common models: TE-10K-MD: Kynar, TEFC, 230/460 vac chemical duty motor

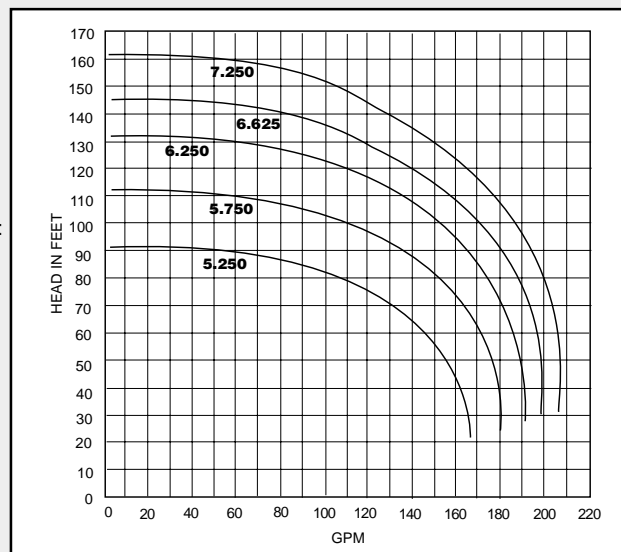

MARCH

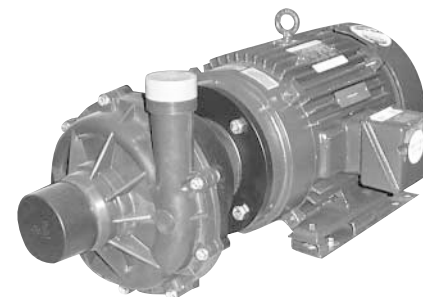

TE-10 Series