


MAGNETIC DRIVE CENTRIFUGALS

UP TO 70 GPM, 57 TDH

- Temperatures to 220° F
- Enclosed impeller
- Extended run dry capabilities
- Construction: Polypropylene or PVDF
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

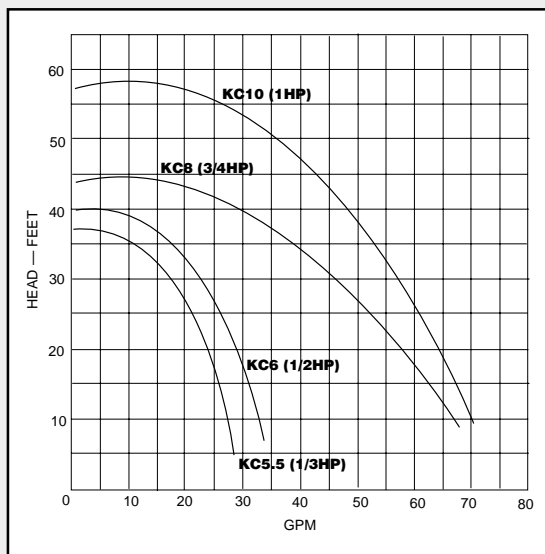


FINISH THOMPSON



KC5.5, 6, 8 and 10 Series

UP TO 92 GPM, 75 TDH

- Temperatures to 220° F
- Construction: Polypropylene or PVDF
- Extended run dry capabilities
- Up to 1.8 specific gravity without requiring an impeller trim
- 50 cps maximum viscosity
- Drive Options: pedestal mount, single and three phase, ODP, TEFC, explosion proof and custom configurations

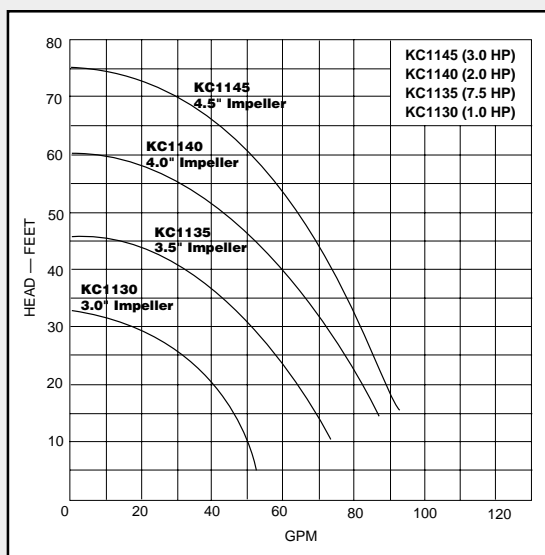


FINISH THOMPSON



KC11 Series

UP TO 170 GPM, 135 TDH

- Temperatures to 220° F
- Enclosed impeller
- Construction: Polypropylene or PVDF
- Extended run dry capabilities
- Up to 1.8 specific gravity without requiring an impeller trim
- 50 cps maximum viscosity
- Drive Options: single and three phase, ODP, TEFC, explosion proof and custom configurations

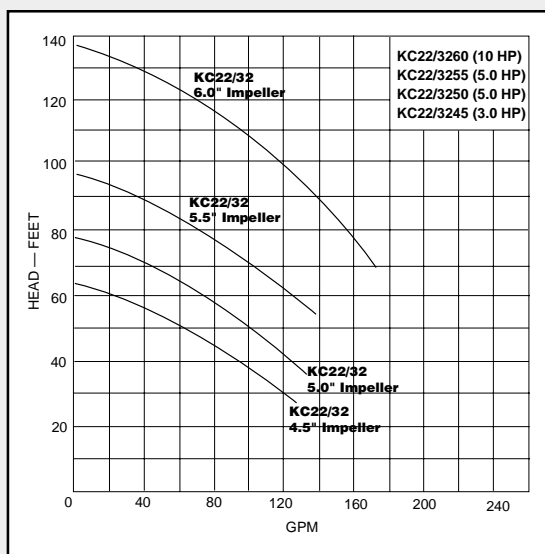

FINISH THOMPSON



KC22 and 32 (Flanged) Series