





**POLYPROPYLENE & FLUOROPLASTIC**

- Flows to 26 GPM
- Heads to 66.2 ft.
- Custom OEM configurations
- Duplex head available and priming chamber available on some models
- 1/250 to 1/3 horsepower
- Port options from:  
1/2" to 1" hose  
1/2" to 1" NPT

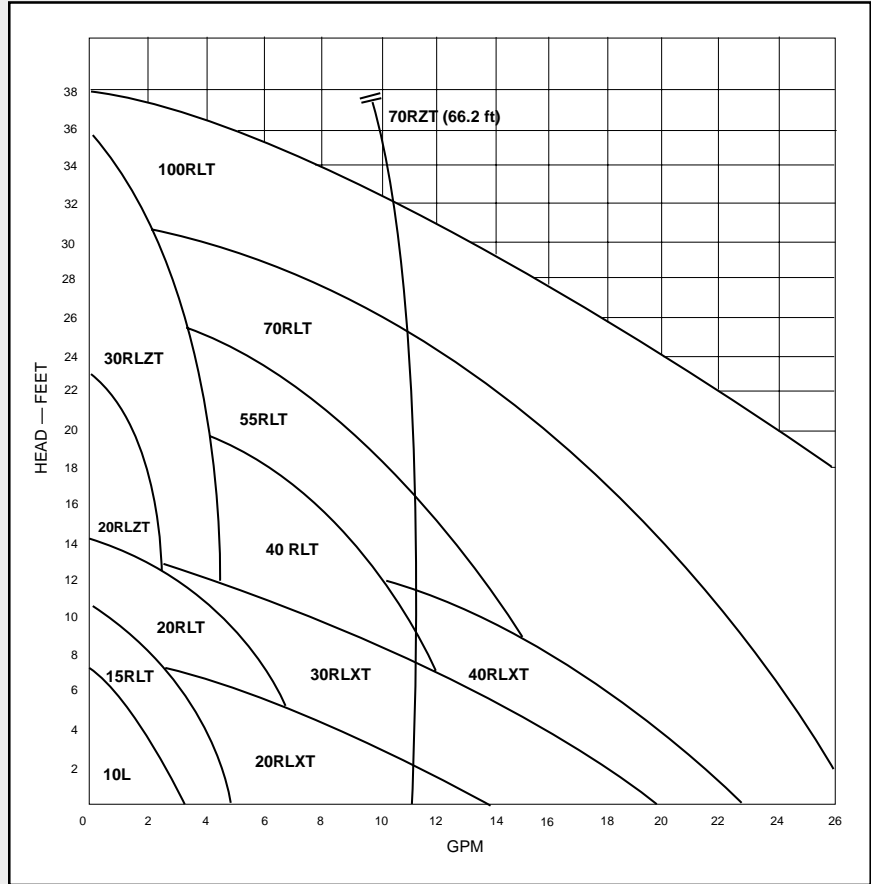

**POLYPROPYLENE & FLUOROPLASTIC**

- Flows to 160 GPM
- Heads to 100 ft.
- Temperatures to 176°F
- Std. C-Face mounting
- Dry run capability
- 1/2 to 5 horsepower
- Port options  
1 1/2" x 1 1/2"  
2" x 1 1/2"

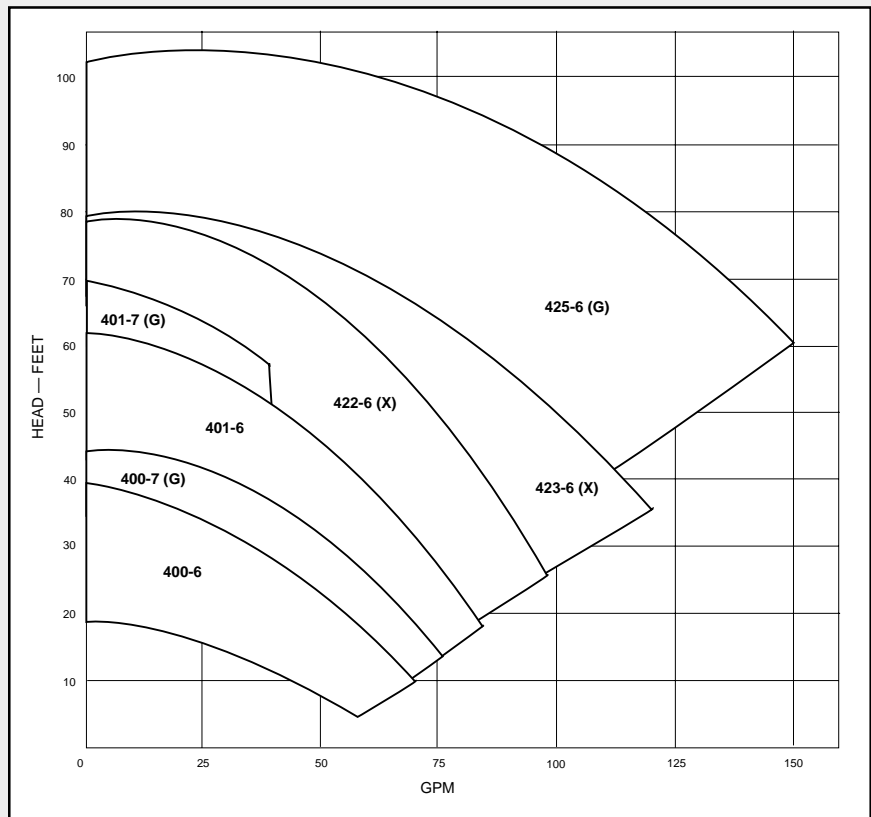

**FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656**