


**MICROPUMP**



**114 Series (GK)**

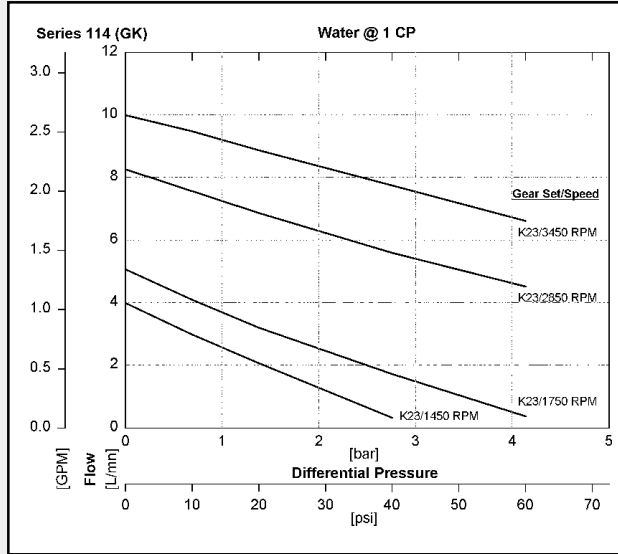


**UP TO 2.9 GPM, 60 PSI,  
10.9 L/MIN, 4.1 BAR**

- Conventional gear/cavity design
- Temperatures to 130° F
- C-Face or compact motor mount
- Housing Options: 316 Stainless Steel
- Gear Options: Teflon
- Static Seal Options: Teflon and Viton

**MICROPUMP**



**220 Series (GC)**

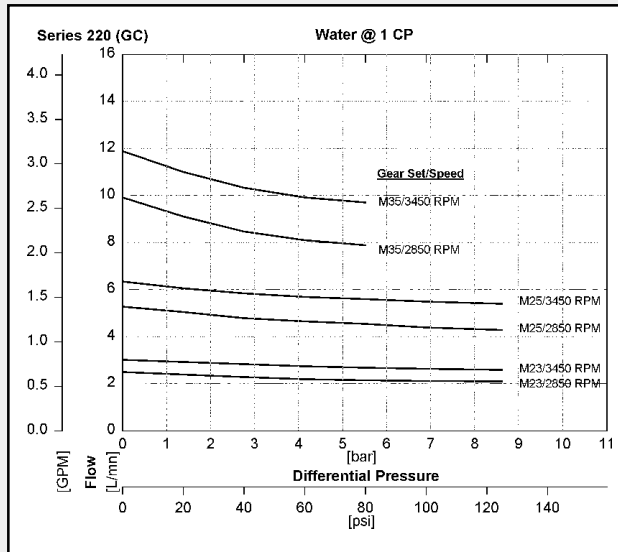


**UP TO 3.2 GPM, 125 PSI  
12.1 L/MIN, 8.6 BAR**

- Suction shoe design technology
- Temperatures to 250° F
- C-face or compact motor mount
- Housing Options: 316 Stainless Steel, Alloy 20, Titanium, Hastelloy C-276, Hastelloy B-2
- Gear Options: PPS, PEEK, PPSKV
- Static Seal Options: Viton, EP, Buna N, TEV (Teflon encapsulated Viton), Kalrez

**MICROPUMP**



**2200 Series (GD)**

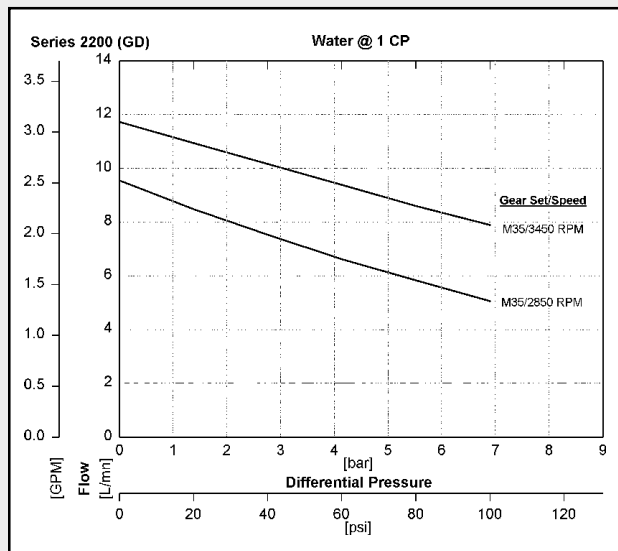

**UP TO 3.2 GPM, 100 PSI  
12.1 L/MIN, 6.9 BAR**

- Conventional gear/cavity design
- Temperatures to 250° F
- Housing Options: 316 Stainless Steel, Alloy 20, Titanium, Hastelloy C-276, Hastelloy B-2, 316 Stainless Steel
- Gear Options: PPS, PEEK, PPSKV
- Static Seal Options: Viton, EP, Buna N, TEV (Teflon encapsulated Viton), Kalrez