



**PRICE
(HP Series)**

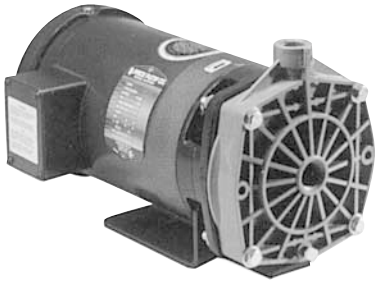

3/4" in CPVC and Bronze

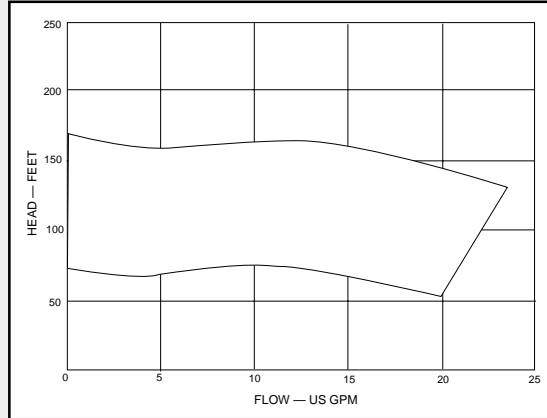


**UP TO 18 GPM,
160 TDH**

- Temperatures to 140° F
- Enclosed impellers
- Construction: CPVC or bronze housing, CPVC impeller, EPR gasket
- Elastomer Options: Buna standard, non-metallic version, other materials available
- Drive Options: 1/2 to 2 horsepower, AC and DC voltages, ODP, TEFC and custom configurations including pedestal mounting

**PRICE
(OH Series)**



3/4" x 1" in CPVC and PVDF

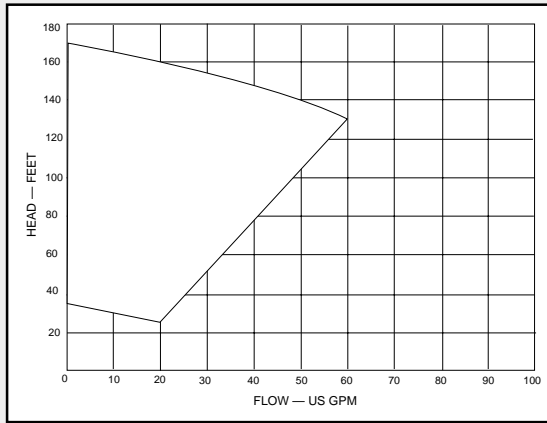


**UP TO 60 GPM,
160 TDH**

- Temperatures to 260° F (PVDF), 180° F (CPVC)
- Enclosed impeller
- Construction: CPVC or PVDF
- No metal to liquid contact
- Elastomers: EPR mech. seal, o-ring, others available including flush option
- Drive Options: 1/4 to 3 HP, AC and DC voltages, ODP, TEFC, XP, and custom configurations including pedestal mount and air drive

**PRICE
(MS 50 Series)**



Stainless Multi-Stage

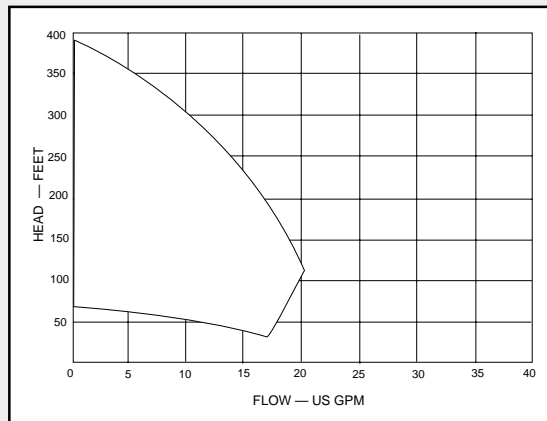


**UP TO 20 GPM,
380 TDH**

- Temperatures to 300° F
- Multi-staged enclosed impellers
- Construction: 316 SS
- Elastomer Options: Viton, EPR, Neoprene, Teflon, Silicon Carbide, double seal, flush and quench
- Drive Options: pedestal, hydraulic, pneumatic, AC and DC voltages and multiple enclosures

AURORA



Vertical Multi-Stage

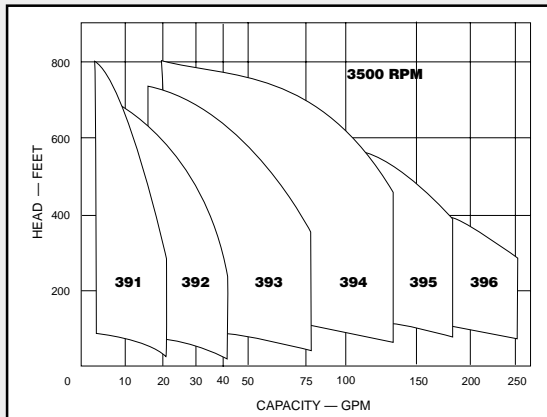

**UP TO 250 GPM,
800 TDH**

- Temperatures to 250° F
- Multi-staged enclosed impellers
- Construction: 304 Stainless
- Elastomers: EPDM o-rings, Carbon vs. Silicon Carbide seals
- Drive Options: single and three phase, ODP, TEFC, explosion proof and custom configurations