


**HYDRA-CELL**




**H25 Series – 20 gpm, 1000 psi, max.**

**1 – 20 GPM, UP TO 1000 PSI**

- Temperatures to 250° F
- Ports: 1 1/2" inlet, 1" outlet
- Housing Options: Brass, 316SS, Kynar, Polypropylene, Nickel Alloy and Cast Iron
- Diaphragm Options: Buna, Viton, EPDM, Neoprene and Teflon

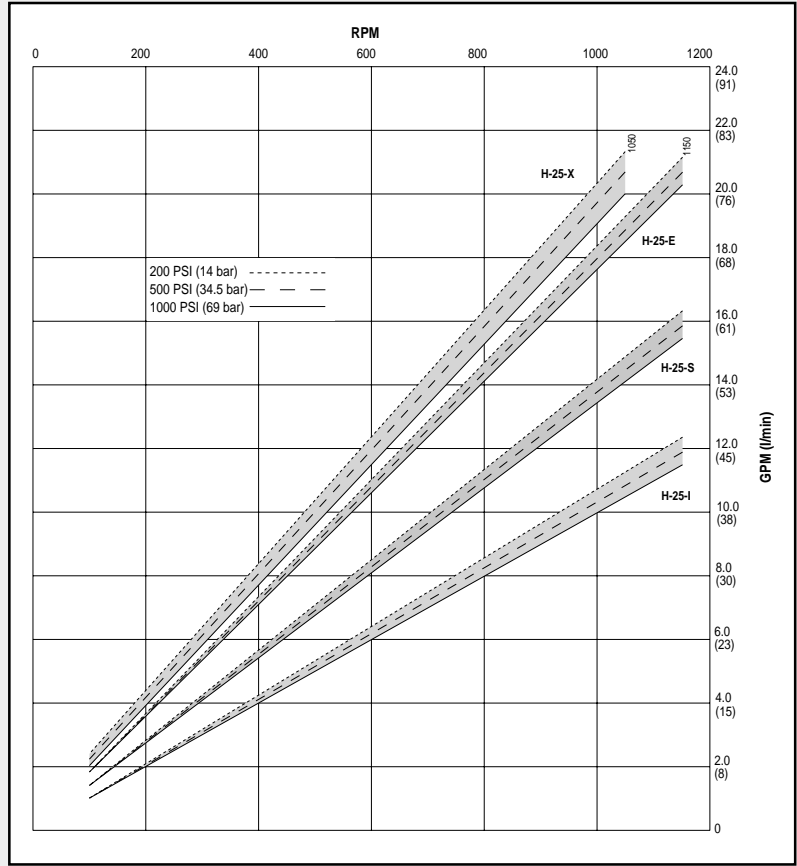


**HYDRA-CELL**

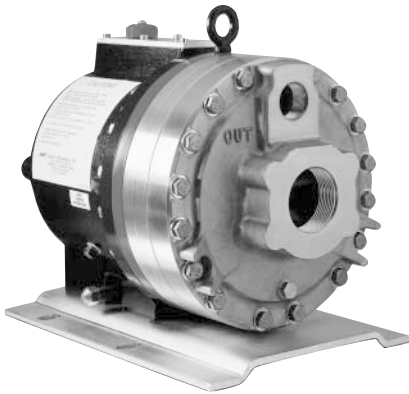

**D35 – 37 gpm, 1200 psi max.**

**4 – 37 GPM, UP TO 1200 PSI**

- Temperatures to 250° F
- Ports: 2 1/2" inlet, 1 1/4" outlet, or SAE flanges
- Housing Options: Brass, 316SS, Nickel Alloy, and Ductile Iron (Nickel plated)
- Diaphragm Options: Buna, Viton, EPDM, Neoprene and Teflon

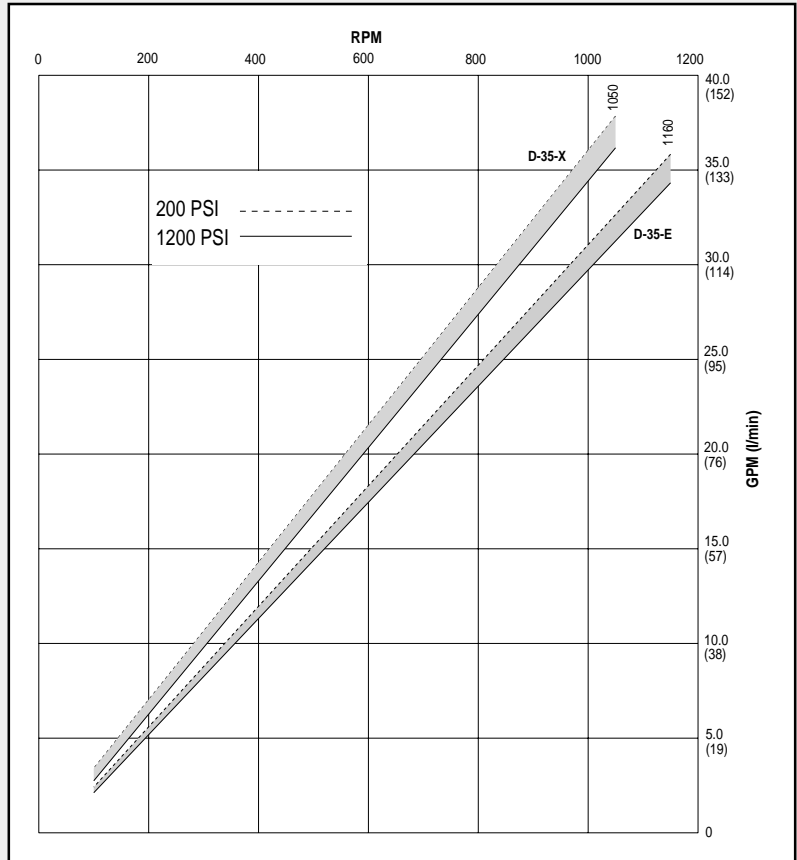

*Slurry duty version available*

**FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656**