


HYDRA-CELL




H25 Series – 20 gpm, 1000 psi, max.

1 – 20 GPM, UP TO 1000 PSI

- Temperatures to 250° F
- Ports: 1 1/2" inlet, 1" outlet
- Housing Options: Brass, 316SS, Kynar, Polypropylene, Nickel Alloy and Cast Iron
- Diaphragm Options: Buna, Viton, EPDM, Neoprene and Teflon

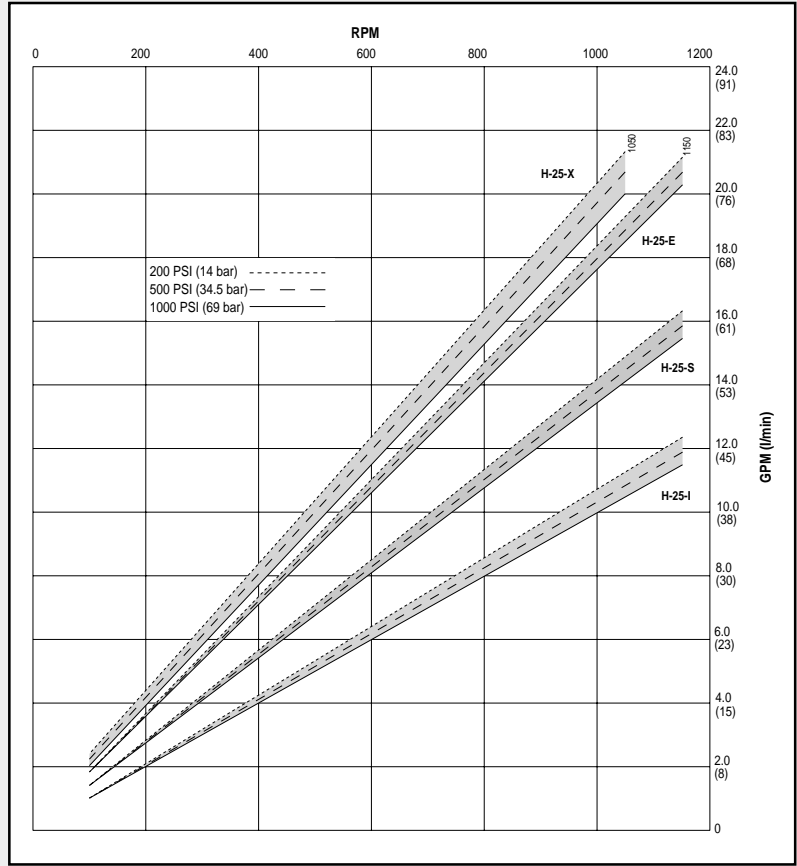


HYDRA-CELL

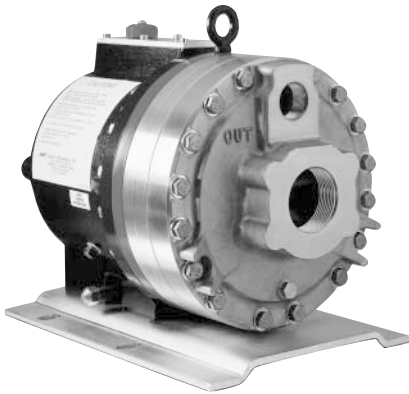

D35 – 37 gpm, 1200 psi max.

4 – 37 GPM, UP TO 1200 PSI

- Temperatures to 250° F
- Ports: 2 1/2" inlet, 1 1/4" outlet, or SAE flanges
- Housing Options: Brass, 316SS, Nickel Alloy, and Ductile Iron (Nickel plated)
- Diaphragm Options: Buna, Viton, EPDM, Neoprene and Teflon

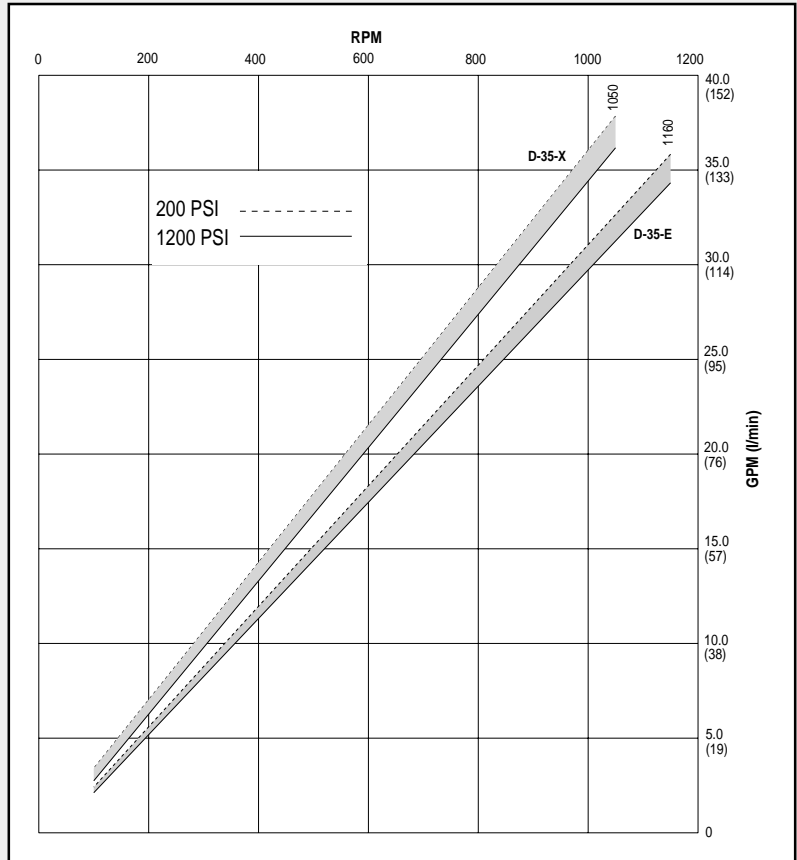

Slurry duty version available

FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656