


# 316SS / ALLOY 20 / HASTELLOY MAG DRIVE

## UP TO 5.7 GPM, 125 PSI 22 L/MIN, 8.6 BAR

- Conventional gear/cavity design
- C-face motor mounting
- Temperatures to 250° F
- Housing Options: 316 Stainless Steel, Alloy 20, Titanium, Hastelloy C-276, Hastelloy B-2
- Gear Options: PEEK, Teflon
- Static Seal Options: Viton, EP, Buna N, Kalrez, TEV (Teflon encapsulated Viton)

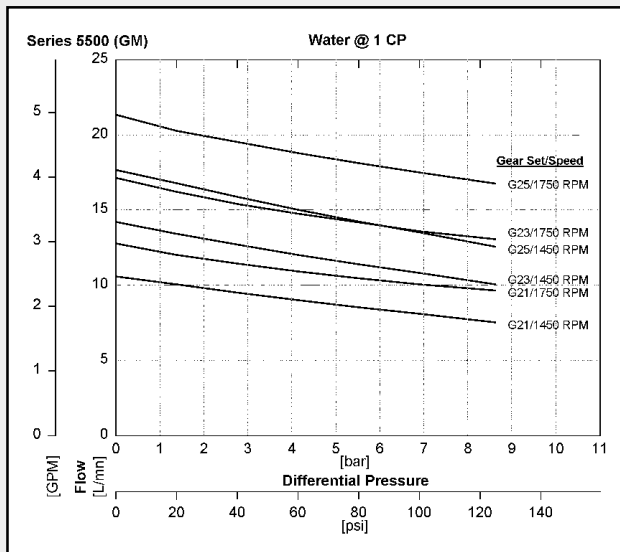


### MICROPUMP



5500 Series (GM)

## UP TO 7 GPM, 125 PSI 26.8 L/MIN, 8.6 BAR

- Conventional gear/cavity design
- C-face motor mounting
- Temperatures to 250° F
- Housing Options: 316 Stainless Steel, Alloy 20, Titanium, Hastelloy C-276, Hastelloy B-2
- Gear Options: Teflon, PEEK
- Static Seal Options: Viton, EP, Buna N, Teflon, Kalrez

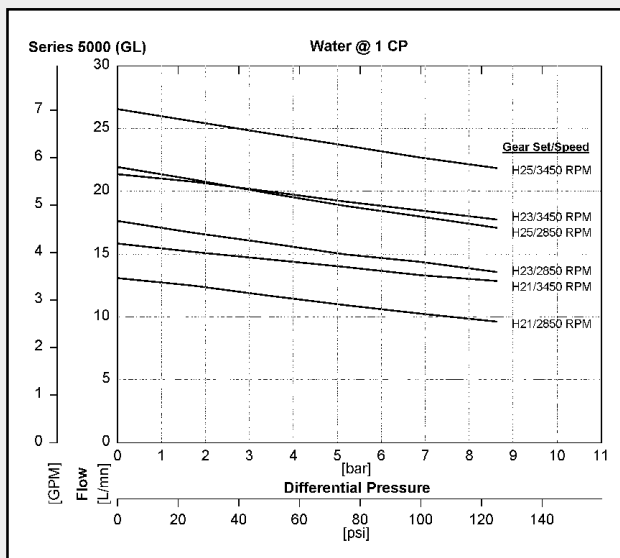


### MICROPUMP



5000 Series (GL)

## UP TO 11.4 GPM, 100 PSI 43 L/MIN, 6.9 BAR

- Conventional gear/cavity design
- Temperatures to 250° F
- C-face motor mounting
- Housing Options: 316 Stainless Steel, Alloy 20, Titanium, Hastelloy C-276, Hastelloy B-2
- Gear Options: PEEK, Teflon
- Static Seal Options: Viton, EP, Buna N, TEV (Teflon encapsulated Viton), Kalrez

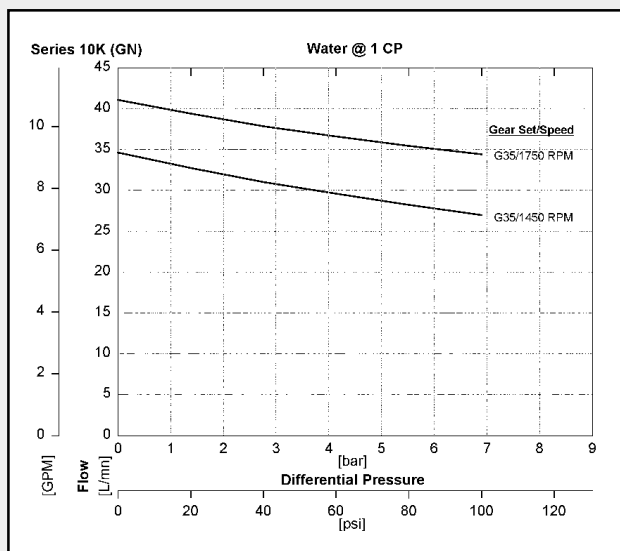

### MICROPUMP



10K Series (GN)

FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656