


**CAT**

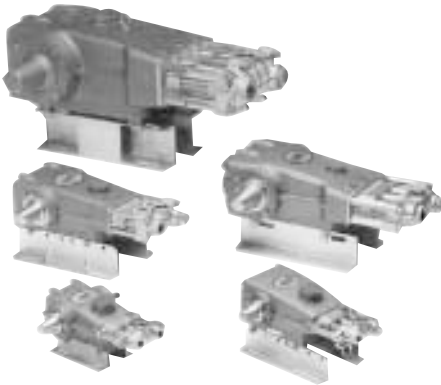


**Self-Priming Piston Series**

**.25 – 60 GPM, 5000 PSI, TRIPLEX PISTON PUMPS**

Cat pump manufactures a wide array of triplex piston pumps to handle flow requirements of .25 to 60 gpm, 100 to 5000 psi, priming conditions of up to 20 feet, and temperatures up to 210° F (with high-temp upgrade). They utilize the unique uniflow design, which takes advantage of the inertia of the moving fluid – no jarring stops, just a smooth continuous flow in one direction through the pump.

Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.	Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.	Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.
280	3.0	1000	1330	2.1	520	5.0	1750	900	6.0	□ 2520C	25.0	800	772	13.7
290	3.5	1200	1200	2.9	623	6.0	1200	850	5.0	6020	60.0	1000	500	41.2
323	5.0	1500	1000	5.2	820	10.0	1000	940	6.9	6024	12.0	5000	500	41.2
333	4.0	1200	1070	3.3	1010	12.0	700	900	5.8	6040	40.0	1500	500	41.2
390	12.0	600	1200	5.0	1520	15.0	1000	830	10.3	6044	20.0	3000	500	41.2
430	5.0	1000	1040	3.4	2520	25.0	800	772	13.7					

**CAT**

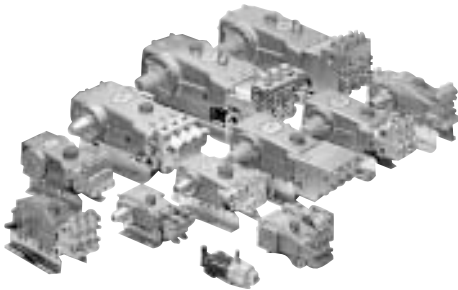


**Flooded-Suction Plunger Series**

**.25 – 70 GPM, 7000 PSI, TRIPLEX PLUNGER PUMPS**

Cat's triplex plunger pumps utilize hardened and polished solid ceramic plungers, preset seals that require no adjustment, and all stainless steel valve assemblies. They will handle flows from .25 to 70 gpm, pressures to 7000 psi and temperatures to 190° F.

Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.	Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.	Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.
□ 230 *237 Δ231	2.3	1500	1725	2.4	● 35G1	5.0	1500	1725	5.0	▲ 1851K	10.0	2200	958	15.0
□ 240 *247 Δ241	3.6	1500	1725	3.6	45 ● 45G1	4.0	3500	1455	8.3	2530 *2537 ▲ 2831	20.1	1200	914	14.0
□ 270 *277 Δ271	3.6	1500	1420	3.6	45 45G1	4.0	3000	1450	10.3	▲ 3507 ▲ 3801	9.0	5000	800	30.9
□ 3CP1120 Δ3CP1121	4.0	2200	1725	6.0	● 5CP5150G1, 118	5.0	3000	1570	10.3	▲ 3517	14.0	3000	800	28.9
3CP1130 Δ3CP1131	2.3	2200	1725	3.5	● 51G1, 118	4.0	3000	1570	7.6	3520 *3527 3521	23.0	2000	800	31.6
3CP1140 Δ3CP1141	3.6	2200	1725	5.4	530	5.0	2500	1100	8.6	3535 *3537 3531	36.0	1200	800	28.7
3CP1120G	3.5	2200	1725	5.4	5500	5.0	3000	1415	10.3	3545 3541	45.0	1000	800	30.9
310 □ 313 Δ311 *317	4.0	2200	950	5.5	56	5.5	2500	1210	13.0	▲ 3831	36.0	1200	800	29.7
□ 5CP2120W	4.0	2500	950	6.9	57	4.5	4000	1285	12.4	3821	23.0	2000	800	31.6
□ 5CP2140W	4.0	2500	1725	6.9	● 58G1, 118	5.0	2500	1570	8.6	▲ 6767 ▲ 6881, K	70.0	1000	600	48.1
□ 5CP2150W	5.0	2000	1725	6.9	● 59G1, 118	5.5	3500	1570	12.2	▲ 6811	15.0	7000	600	72.1
■ 340 *347 Δ341	4.0	2000	1725	5.5	70 ● 70G1 ▲ 781	4.5	5000	1700	15.4	▲ 6821	25.0	3000	615	51.5
5CP3120G1, 118	4.3	3500	1570	10.3	5CP6120	6.0	1600	1450	6.6	6831, K	40.0	2300	625	63.1
34G1	4.0	2000	1725	5.5	650 651	7.0	3000	1000	14.4	▲ 6841, K	47.5	2000	615	65.2
■ 350 *357 Δ351	5.0	1500	1725	5.2	1050 *1057 Δ1051	10.0	2200	958	15.0					

**CAT**

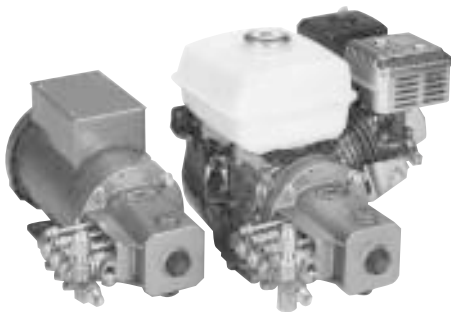

**Compact Close-Coupled Plungers**

**.25 – 5 GPM, 3500 PSI COMPACT CLOSE-COUPLED PLUNGER PUMPS**

Cat manufactures several series of triplex plunger pumps with adapters to mount directly on electric motors and engines of various configurations. Flow of up to 5 gpm, pressures of up to 3500 psi, and temperatures of up to 190° F can be delivered. Please call us for assistance in selecting the right pump for your job.

Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.	Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.	Model	Cap. GPM	Max. Press. PSI	Max. RPM Req.	Max. Hp. Req.
■ 2SF22ELS	2.2	2000	1725	3.0	○ 4SF35G1	3.5	3500	3200	8.4	■ 2DX20EN	2.0	1500	3450	2.7
○ 2SF22ES, GES, GS	2.2	2000	3450	3.0	■ 4SF40ELS	4.0	3500	1725	9.5	○ 2DX30GS	3.0	2000	3200	4.2
■ 2SF25GZ	2.5	2500	3450	4.3	○ 4SF40GS1	4.0	3500	3200	9.5	○ 5DX30G1	3.0	3200	3200	6.6
■ 2SF30ES, GES, GS	3.0	2000	3450	4.1	■ 4SF45ELS	4.5	3000	1725	9.3	○ 5DX35G1	3.5	3200	3200	7.7
□ 2SF35GS, GES	3.5	2000	3450	4.8	○ 4SF45GS1, 118	4.5	3000	3200	9.3	○ 5DX40G1	4.0	3200	3200	8.8
○ 2SF30GZ	3.0	2500	3450	5.2	■ 4SF50ELS	5.0	2500	1725	10.3					
					■ 4SF50GS1	5.0	2500	3200	10.3					

■ - Direct Drive Electric ○ - Direct Drive Gas ● - Gear Box pump models \* - Nickel Aluminum Bronze K - Flush, High Inlet △ - 316 SS Cast Manifold ▲ - 316 SS Block Style Manifold □ - 190°F Hi-Temp

**FOR ENGINEERING AND PUMP SELECTION ASSISTANCE CALL DEPCO AT 1-800-446-1656**