

**BRONZE FITTED CAST IRON - UP TO 210°F - 150 PSI - ALL BRONZE AVAILABLE**



Available in Stainless

*Catalog Number		H.P.	Tappings		TOTAL HEAD														
1-Phase	3-Phase		Suct.	Disch.	PSI Feet	8.6 20	17.2 40	26 60	43.3 100	54.1 125	64.9 150	75.8 175	86.6 200	97.4 225	108.3 250	119.1 275	130 300	140.1 325	151.6 350
<b>1725 RPM</b>																			
BU 24CT6M	**	1/4	1	1	2.4	2.2	1.9	1.6	1.4	1.2	1.0	.8	.6	.5	.4	.3			
BU 24CT7M	**	1/4	1	1	3.4	3.1	2.8	2.3	2.1	1.8	1.6	1.4	1.2	1.0	.8	.7			
<b>3450 RPM</b>																			
BU 3CT5M	BU 33CT5M	1/3	1	1	4.2	4.0	3.8	3.4	3.2	3.0	2.9	2.8	2.7	2.6					
BU 5CT5M	BU 35CT5M	1/2	1	1	4.2	4.0	3.8	3.4	3.2	3.0	2.9	2.8	2.7	2.6	2.6	2.5	2.4	2.4	
BU 3CT6M	BU 33CT6M	1/3	1	1	6.0	5.7	5.3	4.8	4.6	4.4	4.3	4.2							
BU 5CT6M	BU 35CT6M	1/2	1	1	6.0	5.7	5.3	4.8	4.6	4.4	4.3	4.2	4.0	3.9	3.8	3.7			
BU 7CT6M	BU 37CT6M	3/4	1	1	6.0	5.7	5.3	4.8	4.6	4.4	4.3	4.2	4.0	3.9	3.8	3.7	3.7	3.6	
BU 5CT7M	BU 35CT7M	1/2	1	1	8.3	7.8	7.4	6.8	6.5	6.2	6.0	5.8	5.5						
BU 7CT7M	BU 37CT7M	3/4	1	1	8.3	7.8	7.4	6.8	6.5	6.2	6.0	5.8	5.5	5.5	5.3	5.2	5.1	5.0	

Ratings shown are based on test at sea level, pumping clear water at normal temperatures.




Available in Stainless

*Catalog Number		H.P.	Tappings		TOTAL HEAD														
1-Phase	3-Phase		Suct.	Disch.	PSI Feet	8.6 20	17.2 40	26 60	43.3 100	54.1 125	64.9 150	75.8 175	86.6 200	97.4 225	108.3 250	119.1 275	130 300	140.1 325	151.6 350
<b>1725 RPM</b>																			
BU 34CS5M	BU 334CS5M	1/3	1-1/4"	1"	5.8	4.9	4.3	3.3	2.8	2.4	2.1	1.8	1.6						
BU 34CS6M	BU 334CS6M	1/3	1-1/4"	1"	7.8	6.9	6.3	5.2	4.6	4.1	3.7	3.3							
BU 54CS6M	BU 354CS6M	1/2	1-1/4"	1"	7.8	6.9	6.3	5.2	4.6	4.1	3.7	3.3	2.9	2.6	2.3				
BU 34CS7M	BU 334CS7M	1/3	1-1/4"	1"	10.4	9.4	8.5	7.2	6.5										
BU 54CS7M	BU 354CS7M	1/2	1-1/4"	1"	10.4	9.4	8.5	7.2	6.5	5.9	5.4								
BU 54CS8M	BU 354CS8M	1/2	1-1/4"	1"	12.1	11.3	10.4	9.0	8.2										
<b>3450 RPM</b>																			
BU 10CS5M	BU 310CS5M	1	1-1/4"	1"	11	10.6	10.1	9.3	9	8.5	8.2	8	7.7						
BU 15CS5M	BU 315CS5M	1-1/2	1-1/4"	1"	11	10.6	10.1	9.3	9	8.5	8.2	8	7.7	7.5	7.4	7.2	7.1		
BU 10CS6M	BU 310CS6M	1	1-1/4"	1"	16	15.2	14.5	13.5	12.8										
BU 15CS6M	BU 315CS6M	1-1/2	1-1/4"	1"	16	15.2	14.5	13.5	12.8	12.4	12	11.5	11	10.7					
BU 20CS6M	BU 320CS6M	2	1-1/4"	1"	16	15.2	14.5	13.5	12.8	12.4	12	11.5	11	10.7	10.5	10.1	9.7	9.5	
BU 15CS7M	BU 315CS7M	1-1/2	1-1/4"	1"	20.5	19.6	19.5	17.3											
BU 20CS7M	BU 320CS7M	2	1-1/4"	1"	20.5	19.6	19.5	17.3	16.5	16	15.3	14.7							
**	BU 330CS7M	3	1-1/4"	1"	20.5	19.6	19.5	17.3	16.5	16	15.3	14.7	14.2	13.7	13.3	12.8	12.5	12	
BU 20CS8M	BU 320CS8M	2	1-1/4"	1"	26.5	25.5	24.6	23	22										
**	BU 330CS8M	3	1-1/4"	1"	26.5	25.5	24.6	23	22	21.3	20.5	19.8	19.2						
**	BU 350CS8M	5	1-1/4"	1"	26.5	25.5	24.6	23	22	21.3	20.5	19.8	19.2	18.5	18	17.4	16.8	16.3	
**	BU 330CS9M	3	1-1/4"	1"	32.5	31.5	30.5	28.6	27.5	26.5									
**	BU 350CS9M	5	1-1/4"	1"	32.5	31.5	30.5	28.6	27.5	26.5	25.6	24.7	23.8	23	22.2	21.5	20.7	20	

Ratings shown are based on test at sea level, pumping clear water at normal temperatures.

**ALL BRONZE W/MONEL BLADES - UP TO 225°F - 1/2" PORTS**

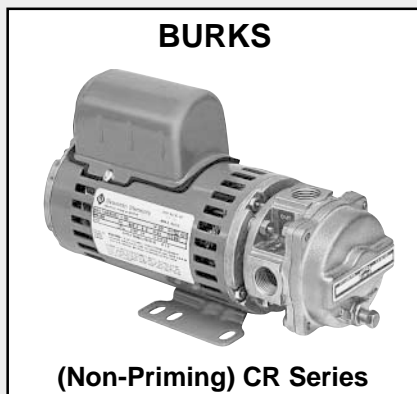

Catalog Number		H.P.	TOTAL HEAD								
115 VAC	230 VAC		PSI Feet	10.8 25	21.6 50	32.5 75	43.3 100	54.1 125	64.9 150	75.8 175	86.6 200
		1/3	<b>CAPACITY IN G.P.M.</b>								
BU A3CR6M	BU 3CR6M		4.3	3.9	3.6	3.4	3.2	3.0	2.9	2.8	2.7

Motors have ball bearing construction and open ventilated enclosure. Motors are NOT drip-proof. Rated for continuous duty at all ratings shown. (Compact size: only 10 1/2" long x 4" wide x 6 1/4" high.)