

CONTENTS

INDEX


NEXT

BACK

HOME


UP TO 3.2 GPM, 100 PSI

- Reinforced Ryton® bodies
- 316SS or Hastelloy® shafts
- Gear material options are Ryton®, PEEK, Teflon®, 316SS or Hastelloy® C
- Carbon, Teflon® or Rulon bearings
- Several choices of mechanical seals, packing or lip seals
- Several optional add-ons for specific applications
- Foot mounted or C-face mounting arrangements

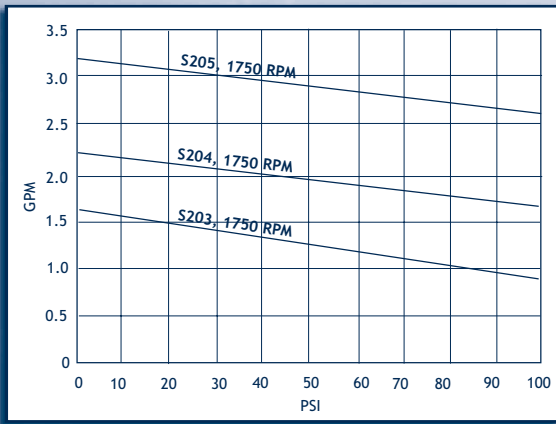


UP TO 6 GPM, 100 PSI

- Reinforced Ryton® bodies
- 316SS or Hastelloy® shafts
- Gear material options are Ryton®, PEEK, Teflon®, 316SS or Hastelloy® C
- Carbon, Teflon® or Rulon bearings
- Several choices of mechanical seals, packing or lip seals
- Several optional add-ons for specific applications
- Foot mounted or C-face mounting arrangements

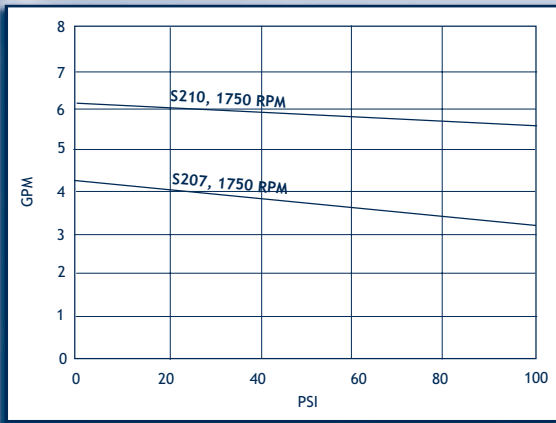

UP TO 11.2 GPM, 100 PSI

- Reinforced Ryton® bodies
- 316SS or Hastelloy® shafts
- Gear material options are Ryton®, PEEK, Teflon®, 316SS or Hastelloy® C
- Carbon, Teflon® or Rulon bearings
- Several choices of mechanical seals, packing or lip seals
- Several optional add-ons for specific applications
- Foot mounted or C-face mounting arrangements

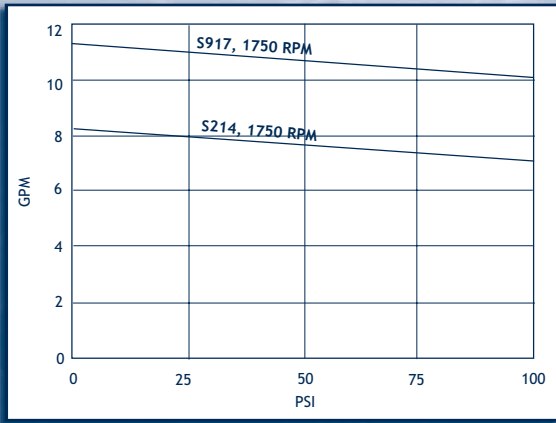

UP TO 29 GPM, 100 PSI

- Reinforced Ryton® bodies
- 316SS or Hastelloy® shafts
- Gear material options are Ryton®, PEEK, Teflon®, 316SS or Hastelloy® C
- Carbon, Teflon® or Rulon bearings
- Several choices of mechanical seals, packing or lip seals
- Several optional add-ons for specific applications
- Foot mounted or C-face mounting arrangements

