


# ELECTRIC DIAPHRAGM PUMPS

## FLOJET



Accumulator Series

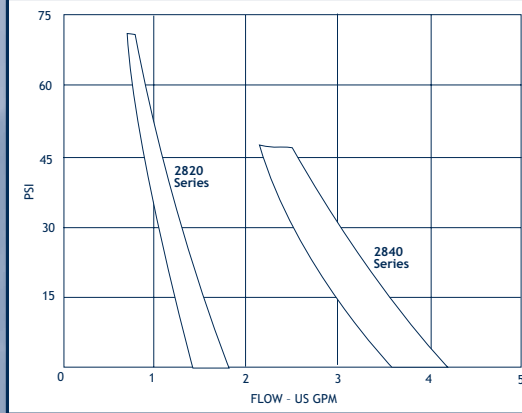

## UP TO 4.5 GPM, 70 PSI

- 40 or 70 psi demand switch
- Temperatures to 130°F
- Self-priming to 10'
- Ports: 2840 series - 1/2" barb inlet 3/8" FPT outlet, 2820 series - 1/4" FPT inlet and outlet
- Voltages: 12, 24 and 32 vdc or 115 and 230 vac, 50/60 Hz
- Wetted Parts: 316SS, Polypropylene, Santoprene, EPDM
- Includes accumulator tank for smooth flow and to reduce cycling

CONTENTS


INDEX

NEXT


BACK

HOME

## FLOJET

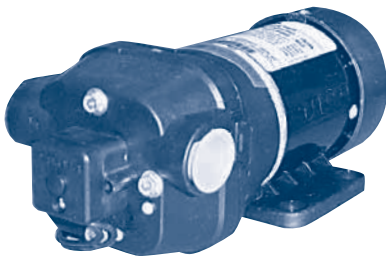

4000 Series

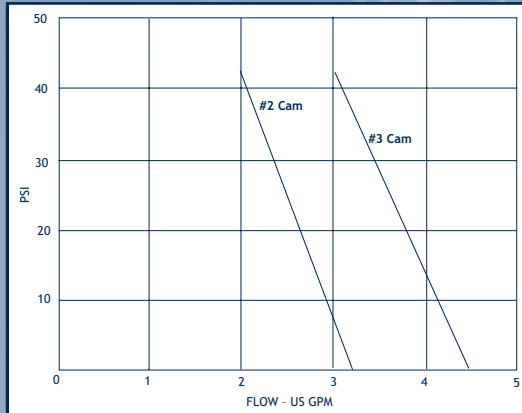


## UP TO 4.5 GPM, 45 PSI

- 45 psi demand switch or manually operated
- Temperatures to 130°F
- Self-priming to 8'
- Ports: 1/2", 5/8" and 3/4" barb 1/2" MPT or 3/4" GHT
- Voltages: 12, 24 and 32 vdc or 115 and 230 vac, 50/60 Hz
- Wetted Parts: 316SS, Polypropylene, Santoprene or Buna (diaphragm) and Viton®, EPDM or Buna (valves)
- Exposed Metal: 316SS

## FLOJET




Variable Speed Series

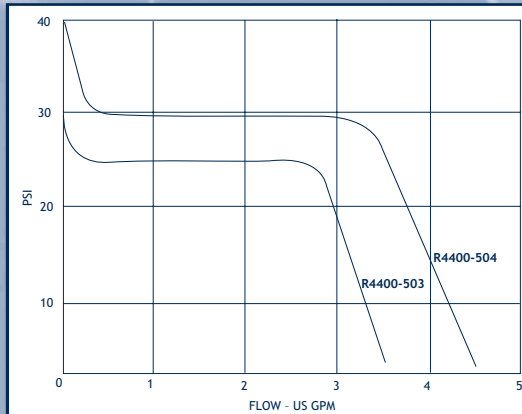


## UP TO 4.5 GPM, 40 PSI

- Variable speed drive motor that provides constant pressure
- Temperatures to 130°F
- Self-priming to 8'
- Ports: 1/2", 5/8" and 3/4" barb inlet, 1/2" MPT or 3/4" GHT
- Voltages: 12 - 24 vdc
- Wetted Parts: 316SS, Polypropylene, Santoprene and Viton®, EPDM or Buna (valves)

## JABSCO

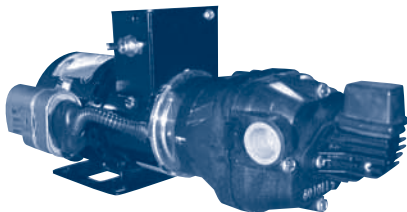

115 vac Continuous Duty

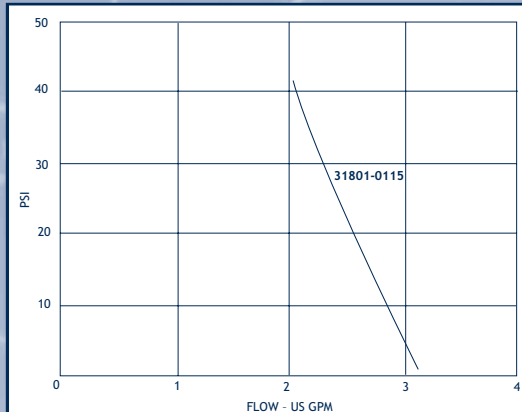

## UP TO 3.3 GPM, 40 PSI

- 40 psi demand switch
- Continuous duty at 25 psi
- Temperatures to 130°F
- Self-priming to 8'
- Ports: 1/2" barb (others available)
- Voltages: 115 vac, 60 Hz
- Wetted Parts: 316SS, Polypropylene, Santoprene and Viton®