



# PROGRESSING CAVITY AND PERISTALTIC

## OBERDORFER

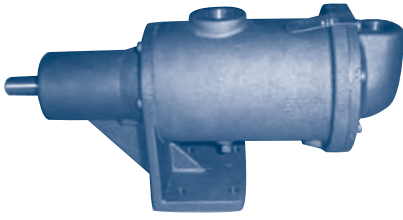

Pedestal and Close-Coupled

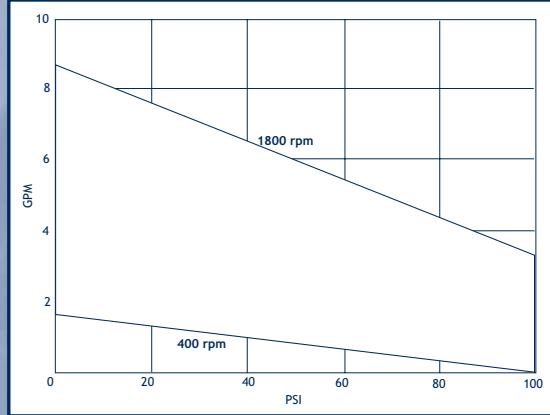

## UP TO 8.5 GPM, 100 PSI

- Temperatures to 180° F
- Will handle up to 50,000 SSU at reduced speeds
- Self-priming to 20'
- Ports: 3/4" FPT
- Drive Options: Pedestal (pulley/coupling) or close coupled
- Housing Options: aluminum or bronze
- Seal Type: carbon/ceramic buna mechanical seal
- Stator Options: Buna

CONTENTS


INDEX

NEXT


BACK

HOME

## OBERDORFER

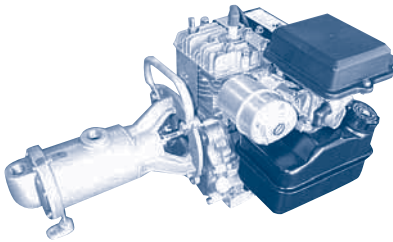


Gasoline Engine Drive

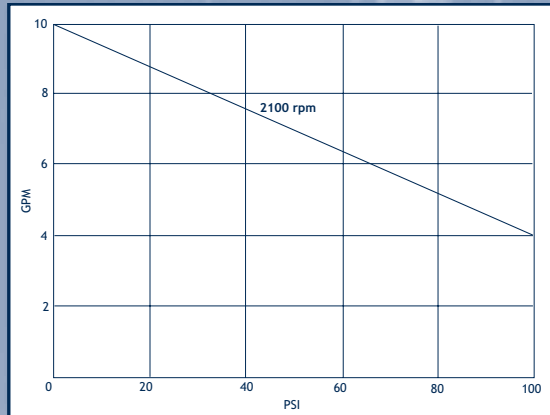


## UP TO 10 GPM, 100 PSI

- Temperatures to 180° F
- Self-priming to 20'
- Ports: 3/4" FPT
- Drive Options: gasoline engine
- Housing Options: aluminum or bronze
- Seal Type: carbon/ceramic Buna mechanical seal
- Stator Options: Buna

## LITTLE GIANT

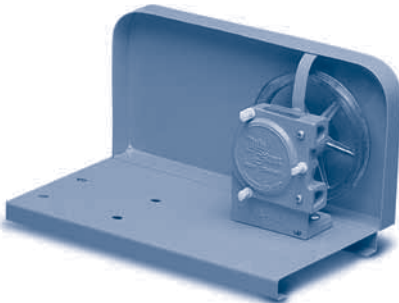

LG-100 / LG-300 (0-5 gpm)

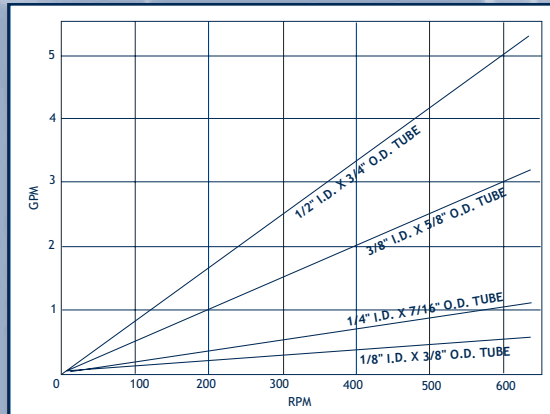


## UP TO 5 GPM, 10 PSI


- Intermittent duty
- Uses standard commercially available hoses
- Belt drive at 700 rpm max
- Variable speed drive available

Model	Recommended Tube Sizes (I.D. X O.D.)	Pump Pulley
LG-100	1/8" x 3/8" or 1/4" x 1/2"	6"
LG-300	3/8" x 5/8" or 1/2" x 3/4"	6"

## GL 200 SERIES



1/4 hp (up to 2.2 gpm)

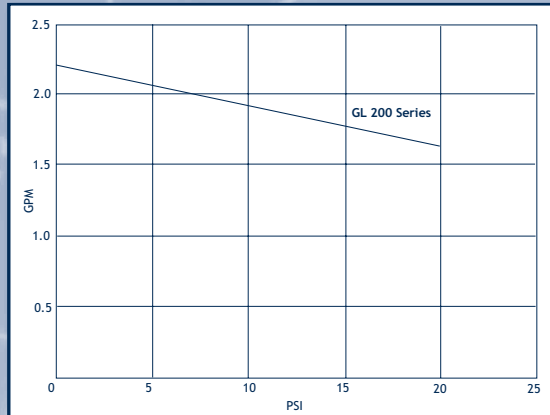

## UP TO 2.2 GPM, 20 PSI

- Self-priming to 15'
- Ports: 1/2" hose barb
- Drive Options: 115 vac ODP motor
- Hose Options: Norprene or silicone (for food or sanitary products)